

Аксессуары для подшипников

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Россия +7(495)268-04-70

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Oil Seals



The oil seal contributes to weight reduction, size reduction and resource-saving, as well as providing high seal performance due to an optimal lip structure. It also achieve low heat generation and long life due to being made from a rubber which has high self-lubrication. O-ring demonstrates high sealing performance when used in various gases and chemicals, in particular water, oil and air.

Related products



Various oil seals

Oil seals maintain seal performance while being compact due to a small seal width. Adopting a line contact lip with appropriate tension, the oil seal demonstrates high sealing performance in low torque zones without losing flexibility or eccentric-resistance. The rubber material has superior durability and achieves low heat generation and long life even at high velocity. Sealing performance and service life are dramatically improved due to a special spiral screw (hydro dynamic rib) mounted in either one direction or both.



Various O rings

Demonstrates high sealing performance when used in various gases and chemicals, in particular water, oil and air.



OIL SEALS & O-RINGS

- **Koyo Oil Seals: Features**
- **Koyo O-Rings: Features**
- **Koyo Functional Products: Features**
- **FEM (Finite Element Method) Analysis**

1. Oil Seals

Engineering Section

Dimensional Tables

2. O-Rings

Engineering Section

Dimensional Tables

3. Application Examples

of Oil Seals and O-Rings

4. References

Engineering Data

5. Request Forms

for Oil Seal Design and Production

Preface

This catalog lists Koyo oil seals and O-rings, including all items of the dimension series specified in ISO, JIS and JASO (Japanese Automobile Standards Organization) standards. This catalog is also based on knowledge gained from our supply record, experience, expertise, technologies, and research developments that JTEKT and KOYO SEALING TECHNO have acquired in cooperation with customers since its foundation in 1964.

A specialty of this new catalog is the comprehensive information, it offers regarding the selection and handling of oil seals and O-rings.

Energy-saving, efforts to protect global environment are in great demand, and we make efforts to continue further research and development in response to these.

We look forward to receiving your further loyal patronage of Koyo products.

If you have any questions or requests in selecting oil seals, please fill out the Request Forms for Oil Seal Design and Production provided at the end of this catalog and send them by fax to your nearest JTEKT operation.

- ★ The contents of this catalog are subject to change without prior notice. Every possible effort has been made to ensure that the data listed in this catalog is correct. However, we can not assume responsibility for any errors or omissions.
- ★ The data included in this catalog consists of representative values that have been obtained under specific conditions. These values do not guarantee the results that can be obtained by way of the information contained in this catalog or the safety of this product. Before using this product, check that it is appropriate and safe to use for the intended application.

Reproduction of this catalog without written consent is strictly prohibited.

Contents

■ Koyo Oil Seals: Features	2
■ Koyo O-Rings: Features	3
■ Koyo Functional Products: Features	4
■ FEM (Finite Element Method) Analysis	6

1. Oil Seals

1.1 Nomenclature and functions of seal components	8
1.2 Seal numbering system	10
1.3 Seal types	11
1.4 Selection of seal	15
1.5 Shaft and housing design	18
1.6 Seal characteristics	22
1.7 Handling of seal	27
1.8 Causes of seal failures and countermeasures	31
1.9 Seal dimensional tables (Contents)	37

2. O-Rings

2.1 Classification of O-ring and backup ring	94
2.2 Numbering systems of O-ring and backup ring	95
2.3 Selection of O-ring	96
2.4 O-ring technical principles	100
2.5 Fitting groove design for O-ring	102
2.6 Handling of O-ring	104
2.7 Typical O-ring failures, causes and countermeasures	105
2.8 O-ring dimensional tables (Contents)	107

3. Application Examples of Oil Seals and O-Rings

3.1 Automobile	144
3.2 Motorcycle	147
3.3 Rolling mill roll necks	148
3.4 Rolling stock axles	149
3.5 Geared motor	150
3.6 Hydraulic motor	150

4. References

4.1 Rubber-material varieties and properties	152
4.2 SI units and conversion factors	154
4.3 Shaft tolerance	158
4.4 Housing bore tolerance	160
4.5 °C - °F temperature conversion table	162
4.6 Steel hardness conversion table	163
4.7 Viscosity conversion table	164
4.8 Shaft surface speed – Quick reference diagram –	165

5. Request Forms for Oil Seal Design and Production	166
---	-----

Koyo Oil Seals: Features

1. Lightweight, compact, and energy-saving

Koyo oil seals offer high sealing performance, while being compact with reduced seal width. They help reduction of machine weight, size, and resource consumption

2. High sealing performance by optimum lip design

Koyo oil seals employ a linear-contact lip, which provides proper radial lip load. The lip design ensures excellent sealing performance, low torque, proper flexibility and high allowability for eccentricity.

3. Low heat generation and long service life by highly self-lubricating rubber materials

Based on extensive research and experimentation, JTEKT has succeeded in developing seal rubber materials with high self-lubrication performance. These rubber materials show limited chemical changes such as hardening, softening and/or aging.

These materials, having excellent durability, can offer long service life with less heat generated even under high-peripheral speed.

4. High sealing performance and long service life by hydrodynamic ribs (Perfect Seal, Helix Seal, Super Helix Seal)

The sealing lip has special spiral threads (hydrodynamic ribs) in one or two directions, which drastically improved sealing performance and service life.



■ Various oil seals



■ Large-size oil seals


■ Koyo O-Rings: Features

1. High sealing performance and reliability

High sealing performance against water, oil, air, various gases and chemicals.

2. Available in a full lineup of designs and sizes

3. Easy handling

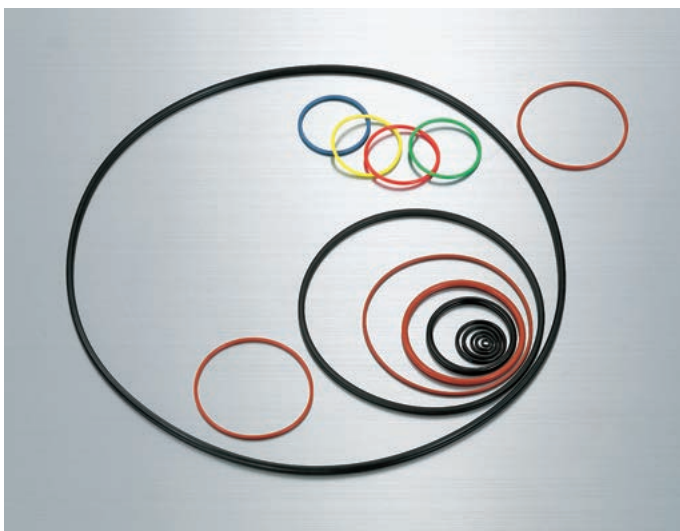

■ Various O-rings

Koyo Functional Products: Features

JTEKT produces various functional products based on advanced sealing technologies and sophisticated manufacturing expertise acquired through extensive research and development.

Koyo functional products are very helpful in improving

machine performance, reducing weight, size, noise and vibration.

Consult JTEKT if there is no product in this catalog that exactly matches your requirements--JTEKT can custom-design products.

1. Functional products for automobiles and industrial machinery



- Center bearing unit
- Bearings molded with vibration isolating rubber
- Spark-plug tube gasket
- Plastic gear shafts
- Dust covers

■ Various functional products



■ Bonded piston seals for automatic transmissions and CVT



■ Friction dampers for manual transmissions and engine balance shafts

2. Functional products for motorcycles



- Air cleaner joint
- Carburetor joint
- Muffler joints
- Plastic gear shafts
- Oil strainer
- Mesh gasket
- Ball-component clutch releases
- Vertical gaskets
- Chain tensioner
- Chain guide

■ Various functional products


FEM (Finite Element Method) Analysis

JTEKT uses the non-linear finite element method to analyze non-linear materials such as rubber, for which accurate analysis was difficult before. The company has been studying sealing-mechanism theories by this method in order to develop new products.


The findings so far have been very useful for basic research as well as for rubber-component design.

The FEM is our common design tool today, enabling highly reliable analysis and evaluation, speeding up research and product development.

Pressure deflection, stress analysis

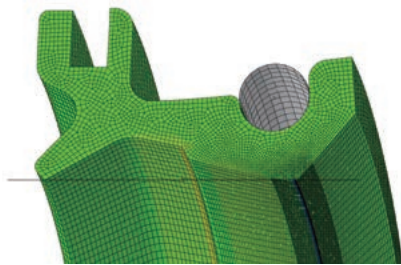

Under no load

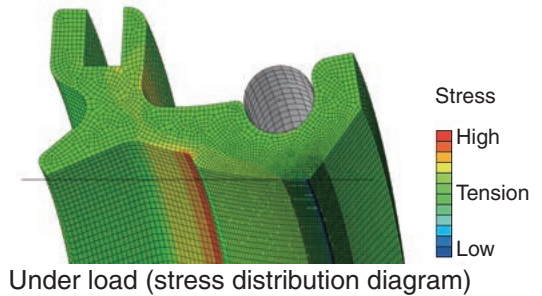

Under load (stress distribution diagram)

Metal ring three-dimensional stress analysis




Under no load




Under load (stress distribution diagram)

Heat transfer analysis (temperature distribution)



When the shaft is standstill

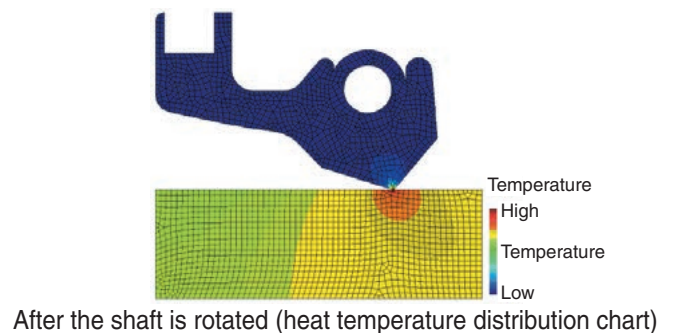


After the shaft is rotated (heat temperature distribution chart)

Three-dimensional seal lip vibration analysis



Under no load



At resonance

1

Oil Seals

1.1 Nomenclature and functions of seal components	8
(1) Nomenclature of components	8
(2) Component functions	8
1.2 Seal numbering system	10
1.3 Seal types	11
(1) Common seal types and their features	11
(2) Special seal types and their features	12
1.4 Selection of seal	15
(1) Selection of seal type	15
(2) Selection of rubber material	16
(3) Selection of metal case and spring materials	18
1.5 Shaft and housing design	18
(1) Shaft design	18
(2) Housing design	19
(3) Total eccentricity	21
(4) Allowable total eccentricity	21
1.6 Seal characteristics	22
(1) Sealing property	22
(2) Seal service life	23
(3) Lip temperature	23
(4) Allowable peripheral speed	24
(5) Allowable internal pressure	25
(6) Seal torque	25
1.7 Handling of seal	27
(1) Storage	27
(2) Handling	27
(3) Mounting	27
(4) Mounting of split MS-type seals	30
(5) Cautions after mounting	30
1.8 Causes of seal failures and countermeasures	31
(1) Causes of seal failures	31
(2) Causes of seal failures and countermeasures	32
1.9 Seal dimensional tables (Contents)	37

1.1 Nomenclature and functions of seal components

(1) Nomenclature of components

Oil seals work to prevent leakage of sealed objects such as lubricants from inside and also to prevent the entry of dust and contaminants from outside.

Oil seals are designed in a variety of shapes according to the applications and substances to be sealed.

Fig. 1.1.1 shows a typical shape of seal and its component nomenclature.

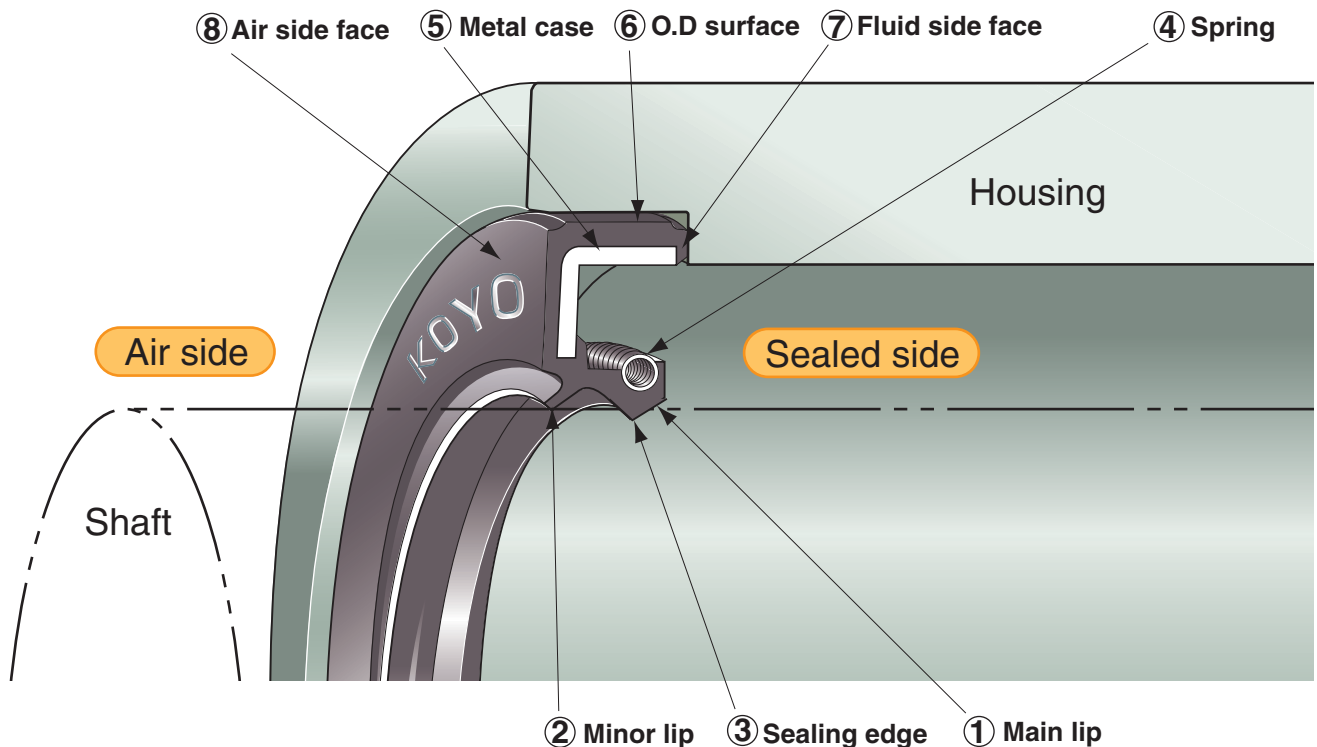


Fig. 1.1.1 Typically shaped oil seal and component nomenclature

(2) Component functions

① Main lip

The main lip is the most critical component of seals. Its sealing edge contacts around the shaft surface in order to provide excellent sealing performance.

During service, seals are placed under various stresses, such as machine vibration, shaft runout, and changes in the temperature and pressure of substances to be sealed.

The main lip is designed so as to generate force (radial lip load) and to keep the sealing edge consistently in contact with the shaft under such stresses.

For such stresses, seal rubber material is made from synthetic rubber, which is highly elastic and abrasion-resistant.

② Minor lip

The minor lip prevents the entry of dust and contaminants from outside. As a lubricant, grease can be retained in the space between main lip and minor lip.


③ Sealing edge

Section of the sealing edge is wedge-shaped to be pressed against the shaft surface and linearly contacts with the shaft to ensure sufficient sealing performance and suitability for operation at high peripheral speed.

④ Spring

The spring supplements the tension at the sealing edge to ensure tight contact between the shaft and the sealing edge and enhanced sealing performance. The spring also prevents the deterioration of main lip sealing performance caused by high heat or others.

Because this spring is a closely wound type coil, the initial tension can be obtained high level, and then changes in load characteristics can be gradual with respect to spring elongation. Tension at the sealing edge can thus be kept stable at an appropriate level.

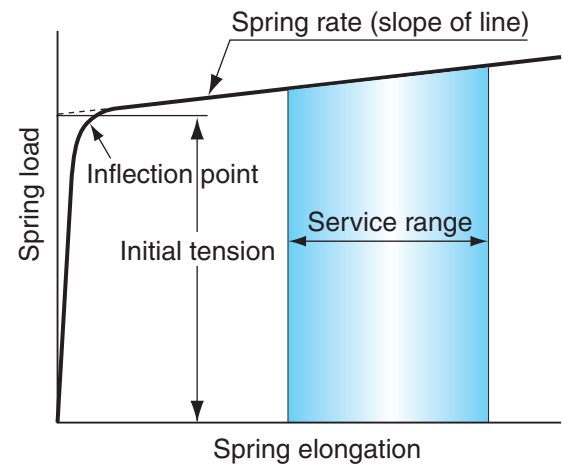

⑤ Metal case

The metal case provides rigidity on seal, helping it settle on the housing securely. It also ensures easy seal handling and mounting.

⑥ O.D surface

Seals are fitted tightly into the housing bore generally. O.D surface prevents the oil leakage through fitting area, while excluding contaminants. This surface may be made of either metal or rubber and selected depending on the application.

⑦ Fluid side face

The front end face of the seal is called the nose. Seals are usually mounted for the nose to face the substances to be sealed. The nose is made of rubber and forms a gasket seal when compressed on housing shoulder.

⑧ Air side face

The oil seal surface vertical to the center line of the shaft on the side that does not come in contact with substances to be sealed is generally called the back face. Either metal or rubber peripheral surface is available, depending on the application.

Fig. 1.1.2 Spring properties for seal

1.2 Seal numbering system

Table 1.2.1 Seal numbering system

Example

MH S A 45 70 8 J

Special shape code J: Additional code is added here as an identifier when two or more seals have exactly the same type codes and dimensional numbers.

Dimensional numbers

Shaft number 45: The seal suits the shaft diameter of $\phi 45$ mm.
Housing bore number ... 70: The seal suits the housing bore diameter of $\phi 70$ mm.
Width number 8: The seal width is 8 mm.


Lip type code No code: without minor lip
A: with minor lip

Spring code No code: without spring
S: with spring

Seal type code
MH: O.D wall is rubber material
HM: O.D wall is metal case
HM(S)H: O.D wall is metal with a reinforcing inner metal case.
(A spring is always provided for this type.)

Remark) For the type codes of special type seals, refer to Section 1.3.

Koyo oil seals: Features

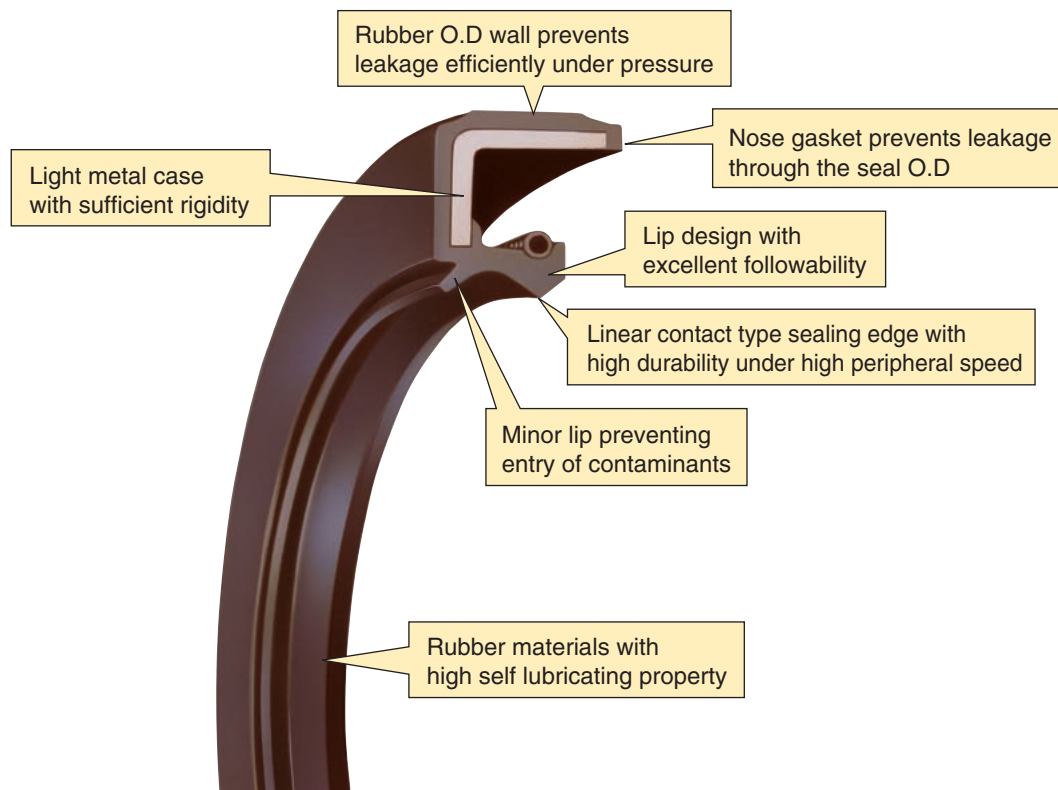

1.3 Seal types

(1) Common seal types and their features

Seals are classified by O.D wall material, lip type and whether with spring or without spring. Major oil seals are specified in ISO 6194 and JIS B 2402. Table 1.3.1 shows common seal types.

Table 1.3.2 lists the seal type codes used at JTEKT, along with the corresponding codes used in the ISO, JIS, and JASO standards.

Table 1.3.1 Oil seals of common types

	With spring ¹⁾			Without spring	
	Rubber O.D wall ²⁾	Metal O.D wall ³⁾	Metal O.D wall (with a reinforcing inner metal case) ^{3) 4)}	Rubber O.D wall ²⁾	Metal O.D wall ³⁾
Without minor lip					
Type code	MHS	HMS	HMSH	MH	HM
With minor lip ⁵⁾					
Type code	MHSA	HMSA	HMSAH	MHA	HMA
Features of each type	1) With spring type secures stable sealing performance 2) Rubber O.D wall type provides stable sealing performance around the seal O.D surface 3) Metal O.D wall type ensures improved fitting retention between the seal O.D and the housing bore 4) Reinforcing inner metal case in the metal O.D wall type protects the main lip 5) With minor lip type is used for applications where there are contaminants, such as dust and foreign matter, on the air side face of the oil seal.				

Table 1.3.2 Koyo oil seal type codes corresponding to the codes used in Industrial standards

KOYO	ISO ¹⁾ · JIS ²⁾	Old JIS
MHS	Type 1	S
HMS	Type 2	SM
HMSH	Type 3	SA
MH	—	G
HM	—	GM
MHSA	Type 4	D
HMSA	Type 5	DM
HMSAH	Type 6	DA
MHA	—	—
HMA	—	—

Notes 1) ISO : International Organization Standardization

2) JIS : Japanese Industrial Standard

(2) Special seal types and their features

JTEKT and Koyo sealing techno Co.,Ltd. provide special seals to meet a wide variety of machines and applications:

Table 1.3.3 Oil seals of special types (1)

⊙: For bi-directional rotation ○: For uni-directional rotation







Seal type	Type code and shape	Motion	Features	Applications
Perfect Seals	 MHSA...XBT	⊙	The hydrodynamic ribs provided in two directions on the air side face of the lip ensure improved pumping effect and higher sealing performance in both rotational directions of the shaft.	Reduction gears input shafts Differential gear sides
Helix Seals	 MHSA...XRT MHSA...XLT	○	The hydrodynamic ribs provided in one direction on the air side face of the lip ensure improved pumping effect and higher sealing performance.	Engine crankshafts Oil pumps Differential gear sides Reduction gears input shafts
Super Helix Seals	 MHSA...XRT MHSA...XLT	○	The hydrodynamic ribs (a combination of fixed-width ribs and wedge-shaped ribs) provided in one direction on the air side face of the lip ensure improved pumping effect and enhanced durability.	Engine crankshafts Oil pumps Differential gear sides Reduction gears input shafts
Double Lip Seals	 HMSD MHSD	⊙	These seals can separate and seal two kinds of oil or fluid on one shaft	Engaged positions of transfer system



Table 1.3.3 Oil seals of special types (2)

⊙: For bi-directional rotation -: For reciprocation

Seal type	Type code and shape	Motion	Features	Applications
Pressure-resistant Seals	 MHP  GMHP	⊙	These seals are designed to reduce lip deformation caused by oil pressure. Sealing performance does not being deteriorated under high pressure	Hydraulic motors Motorcycle engine crankshafts Power steering input shafts
Reciprocating Seals	 MHR	⊙	These seals are designed to accommodate shaft strokes and to lessen lip deformation caused by shaft reciprocating motion	CVT shafts of motorcycles
External Lip Seals	 XM  XMHP	⊙	This type of seal has the lip on its outside, sealing the contact with housing	Front hubs Rear hubs
Seals with Side Lip	 MHP-S	⊙	A large side lip ensures prevention of entry of dust/water	Differential gear sides Differential pinion gear
Mud-resistant Seals with Integrated Sleeve	 D	⊙	These seals are designed to enhance prevention of entry of mud	Wheel hubs
HR Seals	 HRSA	⊙	HR seals ensures sealing performance around seal O.D and retain fitting with housing	Engine crankshafts Wheel hubs
SIM Seals	 MHR  MHPA	⊙	The seals are spring-in mold type, which protect the spring from dust / water and enhance durability	Plug tubes Wheel hubs



■ Seal with Side Lip





■ HR Seal



■ SIM Seal

Table 1.3.3 Oil seals of special types (3)

⊙: For bi-directional rotation

Seal type	Type code and shape	Motion	Features	Applications
Full Rubber Seals	 MS	⊙	Mounting is easy because of full rubber construction. Split type seals are available which can be mounted directly, not necessarily mounting from the shaft end	Long shafts, complex shaped shaft
YS Type Seal	 YS  YSA	⊙	Wide range sizes for medium and large shafts are available	Rolling mills Various medium and large size machines
MORGOIL Seals	 MS...J  MS...NJ	⊙	MORGOIL seals are used exclusively on MORGOIL bearings	MORGOIL bearings
Water Seals	 XMHE	⊙	The double lips ensure improved water-proof performance	Rolling mill roll necks
Scale Seals	 WR  WR...BJ	⊙	These seals prevent the ingress of scales in rolling oil	Rolling mill roll necks
V-Rings	 MV...A	⊙	With these rings, shafts can be sealed at the end. The V-rings can be mounted easily in limited spaces	Rolling mill roll necks


1.4 Selection of seal

(1) Selection of seal type

To select a seal type, seal O.D wall material, lip type, and whether a spring should be provided or not should be decided based on operational conditions as shown in flowcharts below.

If you need oil seals used under special conditions not covered in the flowcharts, refer to Section 1.3 Paragraph (2), "Special seal types and their features."

Table 1.4.1 Flowcharts for oil seal selection

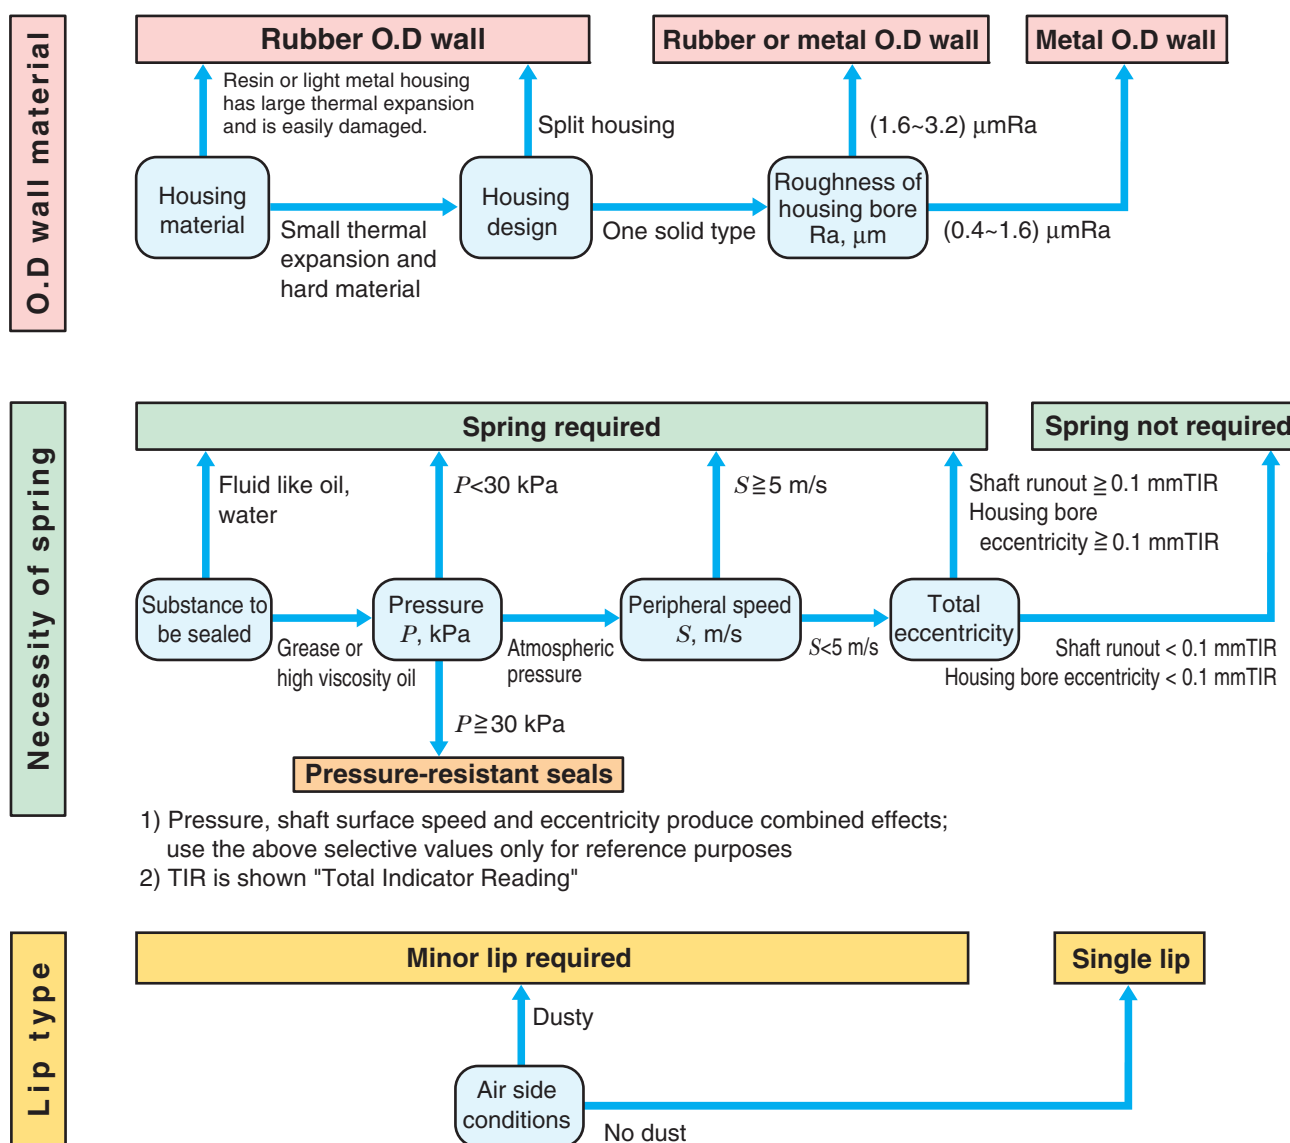

★Seal selection example

- Housing: Made of steel, one solid design, housing bore surface roughness 1.8 μmRa
- Substance to be sealed: Grease
- Pressure: Atmospheric
- Shaft surface speed: 6 m/s
- Air side condition: Dusty

According to the above flowcharts, a seal with a rubber or metal O.D wall, spring, and minor lip is the most suitable for these conditions. The MHSA or HMSA seal is recommended in this case.

(2) Selection of rubber material

Rubber materials should be selected according to temperature conditions and substances to be sealed.

Table 1.4.2 lists rubber materials along with their operational temperature ranges and their stability to fluids.

Table 1.4.2 Rubber materials, operational temperature ranges and their stability to fluids⁴⁾

Rubber material (ASTM ³⁾ code)	Grade	Features	Operational temperature range ^{1) 2)} Lower limit Upper limit Normal operation range -50050100150200 °C		Fuel oil			Lubrication oil and hydraulic fluid								Grease					Chemicals and water																																										
					Gasoline (regular)	Gasoline (premium)	Kerosene, light oil	Gear oil	Turbine oil	Engine oil	Automatic-transmission fluid	Mineral oil	Water + glycol	Phosphoric ester	Brake oil	Cutting oil	Machine oil	Lithium base	Urea base	Ester base	Silicone base	Fluorine base	Alcohol	Ether	Ketone	Water	Concentrate inorganic acid solution	Dilute inorganic acid solution	Concentrate alkaline solution	Dilute alkaline																																	
Nitrile rubber (NBR)	Standard type	Well-balanced rubber in resistance to high-, low- temperature, and to abrasion	-30100		○	○	◎				◎	◎														△	○																																				
	Low-temperature resistant type	High resistant to both high- and low-temperatures and to abrasion	-40100	△	△	○	○				△	△																																																			
	High- and low-temperature resistant type	Very strong and low strain. Superior in resistance to high- and low-temperature	-40110	△	△	○	◎				◎	◎																																		○	×	×	○	○	◎	◎	△	◎	◎	○	△	×	◎	×	△	○	○
	Heat resistant type	Enhanced heat and abrasion resistance. Highly compatible with synthetic oil	-20120	○	○	◎	◎				○																																																				
	For food processing machines	Nitrile rubber passed tests specified in the Food Sanitation Law	-30100	△	△	○	○				△																																																				
Hydrogenated nitrile rubber (HNBR)	Standard type	Compared with nitrile rubber, superior in resistance to heat and to abrasion	-30140		◎	◎	◎	◎	◎	◎	◎	◎	○	×	×	◎	◎	◎	◎	◎	◎	◎	△	×	△	○	○																																				
Acrylic rubber (ACM)	Standard type	High resistant to oil and to abrasion	-20150		△	△	◎	◎	◎	◎	◎	×	×	×	△	◎	◎	◎	×	◎	◎	×	×	×	○	×	△	×	×																																		
	High- and low-temperature resistant type	Improved low-temperature resistance. Low strain and same level heat resistance as standard type	-30150	△																					△																																						
Silicone rubber (VMQ)	Standard type	Wide operational temperature range and good abrasion resistance	-50170		×	×	○	×	○	○	△	◎	△	○	△	△	×	○	○	○	×	△	○	△	○	◎	◎																																				
Fluoro rubber (FKM)	Standard type	Most superior in heat resistance and good abrasion resistance	-20180		◎	◎	◎	◎	◎	◎	◎	△	×	△	◎	◎	◎	△	◎	◎	○	×	×	△	○	◎	×	△																																			

* The information provided in the above chart is for reference only. For specific details, consult JTEKT.

Notes 1) Operational temperature means the lip (Sliding part) temperature. It should be determined based on ambient temperature, heat generated by the machine, lip friction heat, heat generation by the agitation of the substance to be sealed and heat transferred from other components etc.

2) The highest normal-operation temperature may be lower than indicated in this table, depending on the kind and properties of the substance to be sealed (Refer to Table 1.4.3.)

3) ASTM : American Society for Testing and Materials.

4) Properties above may be affected by the components of rust preventing oil and cleaning fluid. Consult JTEKT.

Table 1.4.3 Upper limits guideline of normal operation temperature of rubber materials used with different oils (°C)

Rubber material	Gear oil	Turbine oil	Engine oil	ATF
Nitrile rubber	(100)	100	120	(120)
Hydrogenated nitrile rubber	140	←	←	←
Acrylic rubber	150	←	←	←
Silicone rubber	Incompatible	150	170	(150)
Fluoro rubber	180	←	←	←

Remark)

The () indicates oil with extreme pressure additives. Extreme pressure additives are compounds of phosphor, sulfur or chlorine base, added to prevent wear or seizure on sliding or rotating surfaces. These compounds are activated by heat and chemically react against rubber, which deteriorates rubber properties.

◎ : The rubber has excellent resistance to the substance to be sealed

○ : The rubber has good resistance to the substance except under extreme conditions

△ : The rubber is not resistant to the substance except under specific favorable conditions

× : The rubber is not resistant to the substance

Small talk 1

A new salesman's resolution

When the new salesman asked the chief engineer how the elastic rubber is made, he got the reply: "After adding cross-linking chemicals to rubber polymers made from naphtha, high pressure is applied under high temperature. This creates a long-

lasting elasticity. High stress conditions do wonders to things, even to humans."

Hearing this, the new salesman resolved to live like rubber, resilient and bouncing back into shape.

(3) Selection of metal case and spring materials

The materials of metal case and spring can be selected according to the substance to be sealed.

Table 1.4.4 Compatibility of metal-case and spring materials with substance to be sealed

Material Substance to be sealed	Metal case		Spring	
	Cold rolled carbon steel sheet (JIS SPCC)	Stainless steel sheet (JIS SUS304)	High carbon steel wire (JIS SWB)	Stainless steel wire (JIS SUS304)
Oil	○	—	○	—
Grease	○	—	○	—
Water	×	○	×	○
Seawater	×	○	×	○
Water vapor	×	○	×	○
Chemicals	×	○	×	○
Organic solvent	○	○	○	○

○ : Compatible × : Incompatible — : Not applicable

Small talk 2

A service engineer's finding

One customer called, "Some seals show oil leakage and some are OK. Please come and see immediately." A JTEKT service engineer visited the customer.

He checked shaft diameter and any damage, also visually checked the seals, but no possible cause of oil leakage was found.

He asked how the shaft surface was finished. It was paper lapped to get the desired level of surface roughness. He then checked the shaft surface and found that the leaking shaft had lead marks (spiral traces of lapping) running in the leaking direction. When he rotated the shaft in the reversing direction, no leakage occurred.

Showing a catalog, he advised the customer to finish shafts by plange cut grinding. Satisfied, he went back and felt it was a good day.

1.5 Shaft and housing design

(1) Shaft design

Oil seals can show good sealing performance when mounted on properly designed shafts. To design shafts properly, follow the specifications below.

1) Material

Shafts should be made from carbon steels for machine structural use, low-alloy steel, or stainless steel.

Brass, bronze, aluminum, zinc, magnesium alloy and other soft materials are not suitable, except for special applications such as for low-speed or in a clean-environment.

2) Hardness

Shaft hardness should be at least 30 HRC. In a clean environment, shaft hardness does not influence seal performance. However, in an environment where dust, contaminated oil, etc. exists, a shaft hardness of 50 to 60 HRC is recommended in consideration of factors such as shaft wear.

Hard shaft is advantageous regarding seal damage prevention.

3) Dimensional accuracy

The shaft diameter tolerance should be h8. Seals are designed to suit shafts with the tolerance of h8.


When mounted on other tolerance shafts, seals may be unable to provide sufficient sealing performance. For use of shaft diameter tolerances larger than h8, consult JTEKT.

Table 1.5.1 h8 Shaft tolerance

Nominal shaft diameter d , mm		Tolerance μm	
		h8	
Over	Up to	Upper	Lower
3	6	0	-18
6	10	0	-22
10	18	0	-27
18	30	0	-33
30	50	0	-39
50	80	0	-46
80	120	0	-54
120	180	0	-63
180	250	0	-72
250	315	0	-81
315	400	0	-89
400	500	0	-97
500	630	0	-110
630	800	0	-125
800	1 000	0	-140

4) Shaft end chamfer

To protect seals from damage at mounting onto shafts, recommended chamfer on the shaft end is shown below.

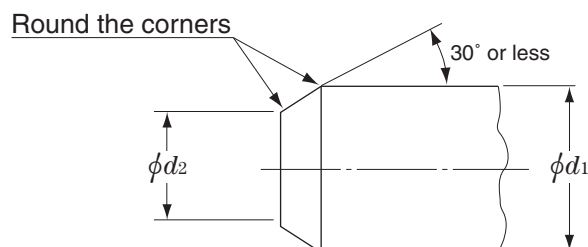

Nominal shaft diameter d_1 , mm		d_1-d_2 mm	Nominal shaft diameter d_1 , mm		d_1-d_2 mm
Over	Up to		Over	Up to	
—	10	1.5 min.	50	70	4.0 min.
10	20	2.0 min.	70	95	4.5 min.
20	30	2.5 min.	95	130	5.5 min.
30	40	3.0 min.	130	240	7.0 min.
40	50	3.5 min.	240	500	11.0 min.

[Remark] When round chamfer is applied, take the above specified d_1-d_2 dimensional chamfer or more.

Fig. 1.5.1 Shaft end chamfer


5) Surface roughness and finishing method

To ensure the sealing performance of seals, the shaft surface to be in contact with the lip should be finished to 0.1-0.32 μmRa and 0.8-2.5 μmRz in roughness.

Note that lead marks on the shaft surface may carry the substance to be sealed in the axial direction during shaft rotation, which interferes with the function of the seal. Finish shaft surface such that the lead angle will be no greater than 0.05° . To achieve this, plange cut grinding is most suitable. To avoid undulation on the shaft surface, the ratio of shaft rotational speed vs grinding-wheel rotational speed should not be an integer.



■ **Good finished surface**



■ **Undesirable finished surface**

The surface shows visible lead marks

Fig. 1.5.2 Shaft surface with and without lead marks

(2) Housing design

1) Material

Steel or cast iron is generally used as the material of housings. When aluminum or plastic housing is used, the following consideration and study are required, as seal seating in housing bore may become loose fitting under high temperature because the housing material and seal material have different linear expansion coefficients. This may cause problems such as leakage through the seal O.D, or seal dislocation.

2) Dimensional accuracy

The housing bore tolerance should be H7 or H8 when bore is 400 mm or less. For larger housing bores, recommended tolerance is H7.


Table 1.5.2 Housing bore tolerance

Nominal bore diameter D , mm		Tolerance μm			
		H7		H8	
Over	Up to	Upper	Lower	Upper	Lower
3	6	+12	0	+18	0
6	10	+15	0	+22	0
10	18	+18	0	+27	0
18	30	+21	0	+33	0
30	50	+25	0	+39	0
50	80	+30	0	+46	0
80	120	+35	0	+54	0
120	180	+40	0	+63	0
180	250	+46	0	+72	0
250	315	+52	0	+81	0
315	400	+57	0	+89	0
400	500	+63	0	—	—
500	630	+70	0	—	—
630	800	+80	0	—	—
800	1 000	+90	0	—	—
1 000	1 250	+105	0	—	—
1 250	1 600	+125	0	—	—



3) Chamfer

Provide the chamfer at the housing bore inlet as shown below so that a seal can be mounted easily and avoided from damages.

Shouldered bore

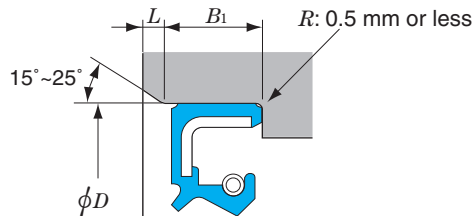

Straight bore

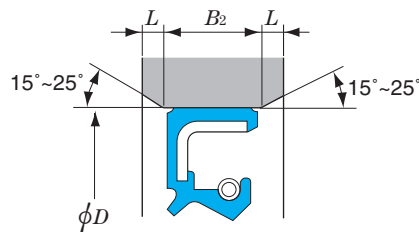

Unit : mm


Nominal seal width, b		B_1 min.	B_2 min.	L
Over	Up to			
—	10	$b + 0.5$	$b + 1.0$	1.0
10	18			1.5
18	50			
		$b + 0.8$	$b + 1.6$	

[Remark] b indicates the width of a seal.

Fig. 1.5.3 Recommended housing bore chamfers

4) Housing shoulder diameter

In case the housing bore has a shoulder, satisfy the following dimensional requirements.

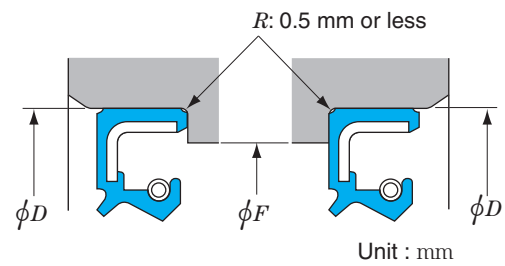

Nominal seal O.D, D		F
Over	Up to	
—	50	$D - 4$
50	150	$D - 6$
150	400	$D - 8$

[Remark] D indicates the outer diameter of a seal.

Fig. 1.5.4 Recommended housing shoulder diameters

5) Surface roughness

To ensure seal sitting and to prevent leakage through seal O.D, finish bore surface to the roughness specified below.

Table 1.5.3 Housing bore surface roughness

Seal type	Housing bore surface roughness
For metal O.D wall type seal	(0.4~1.6) μmRa (1.6~6.3) μmRz
For rubber O.D wall type seal	(1.6~3.2) μmRa (6.3~12.5) μmRz

Seals with coated metal O.D wall are available in case metal O.D wall type seals with extremely high sealing performance are required.

Consult JTEKT for these oil seals.

(3) Total eccentricity

When the total eccentricity is excessive, the sealing edge of the seal lip cannot accommodate shaft motions and leakage may occur.

Total eccentricity is the sum of shaft runout and the housing-bore eccentricity. It is normally expressed in TIR (Total Indicator Reading).

Shaft runout is defined as being twice the eccentricity between the shaft center and center of shaft-center rotation trajectory.

This is also normally expressed in TIR.

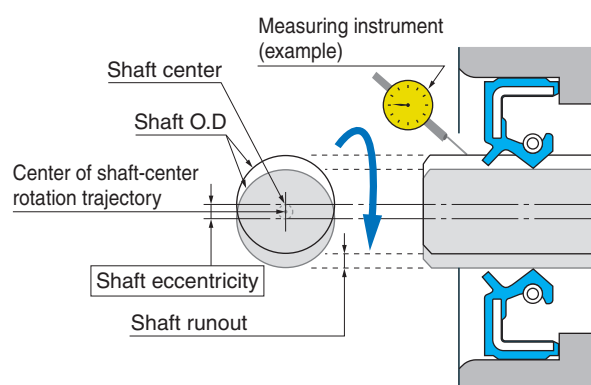


Fig. 1.5.5 Shaft runout

Housing bore eccentricity is defined as being the double of eccentricity between the housing-bore center and shaft rotation center. It is generally expressed in TIR (Total Indicator Reading).

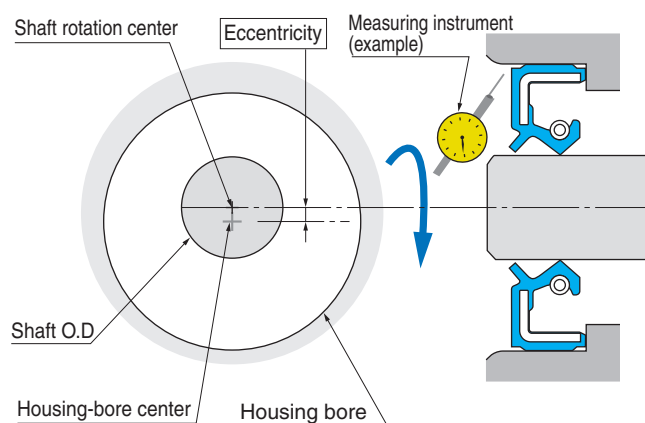


Fig. 1.5.6 Housing bore eccentricity

(4) Allowable total eccentricity

The allowable total eccentricity is the maximum total eccentricity at which the sealing edge can accommodate shaft rotation and retain adequate sealing performance. The allowable total eccentricity of seals is dependent not only on seal characteristics, such as seal type, seal size, and rubber material, but also on other conditions, including shaft diameter tolerance, temperature and rotational speed.

It is therefore difficult to determine the allowable total eccentricity of individual seals. The typical allowable total eccentricity values of seals are shown in Fig. 1.5.7.

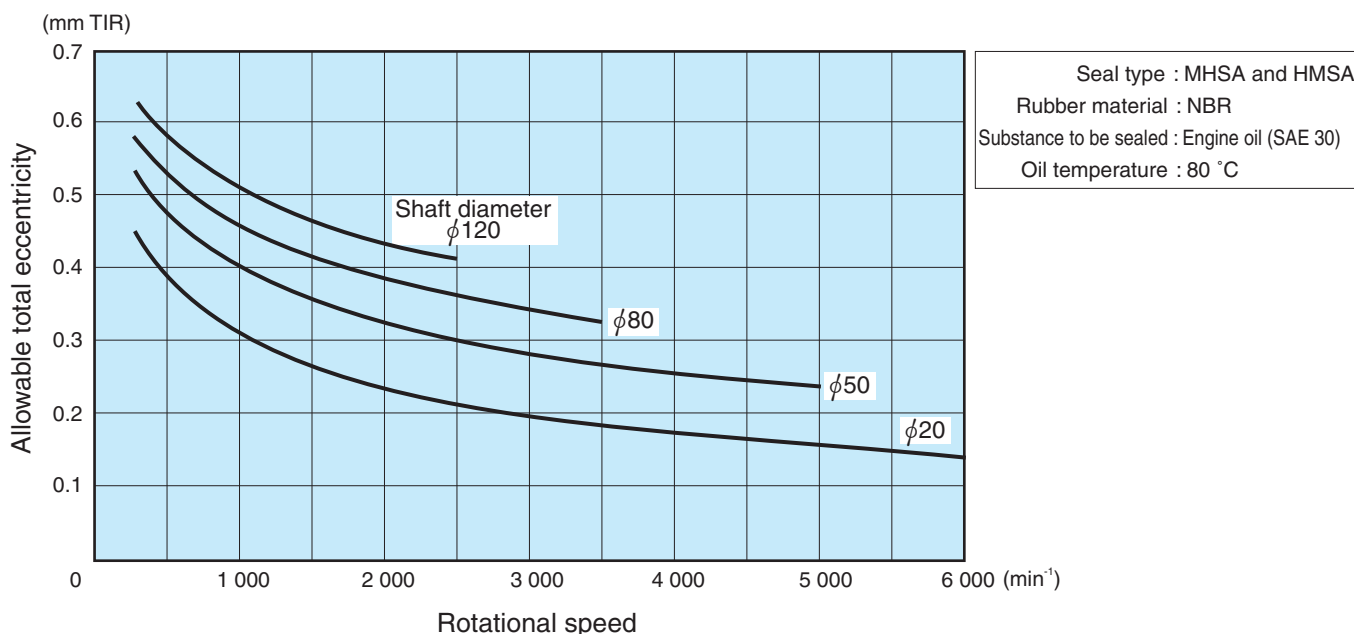


Fig. 1.5.7 Allowable total eccentricity for oil seal (reference)

1.6 Seal characteristics

(1) Sealing property

Oil seals are used to prevent lubricants or other fluids from leaking outside of the equipment or machine.

As shown in Fig. 1.6.1, the main lip shape and the contact with the rotating shaft surface produce a pumping effect that returns the fluid, thus ensuring the fluid is contained inside.

The pumping effect is measured and expressed by pumped fluid volume per time unit. The greater the pumped volume, the higher the sealing performance will be.

The pumped volume depends on multiple factors, such as rotational speed and fluid viscosity.

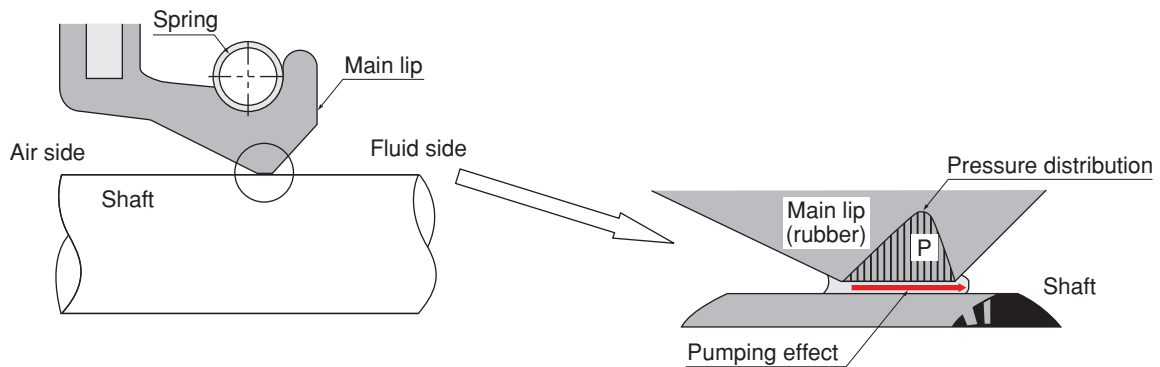


Fig. 1.6.1 Sealing property

As it can be observed in Fig. 1.6.2, which shows the relation between rotational speed and pumped volume, the pumped volume increases with the rotational speed.

Using the hydrodynamic ribs can further increase pumped volume.

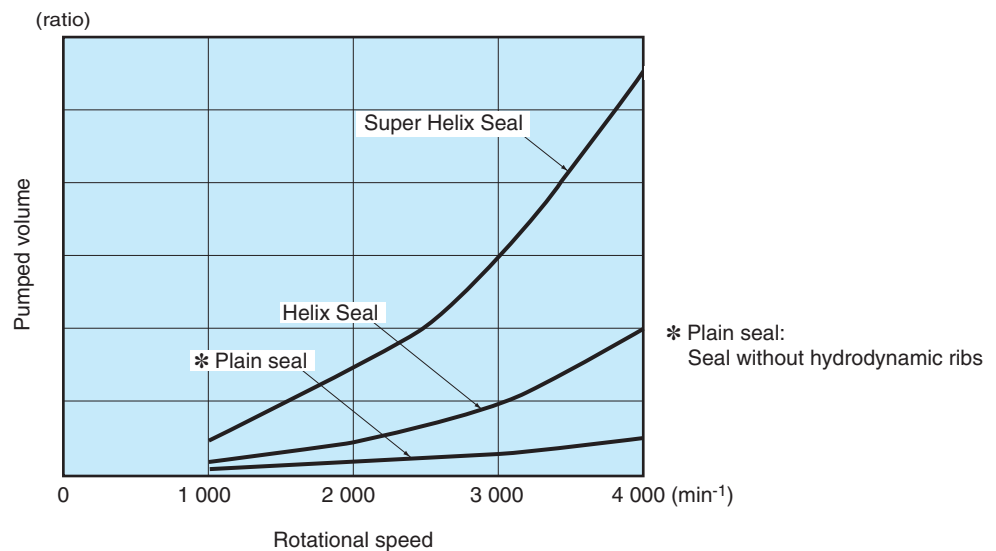


Fig. 1.6.2 Rotational speed and pumped volume (reference)

(2) Seal service life

The seal service life is defined as the time it takes to reach insufficient seal performance, which can be the result of wear on the lip rubber, chemical deterioration due to the use of oil or grease, or hardening.

It is not so easy to determine actual seal service life, because it is dependent on many factors, such as condition of operational temperature, eccentricity, rotational speed, substance to be sealed, and lubrication.

The diagram below (Fig. 1.6.3) shows the curves of estimated seal service life, obtained using major life-determining conditions as parameters, such as rubber material, lubricant, and lip temperature.

The service life shown in Fig. 1.6.3 is approximate, and the actual service life may be shorter depending on the operating conditions.

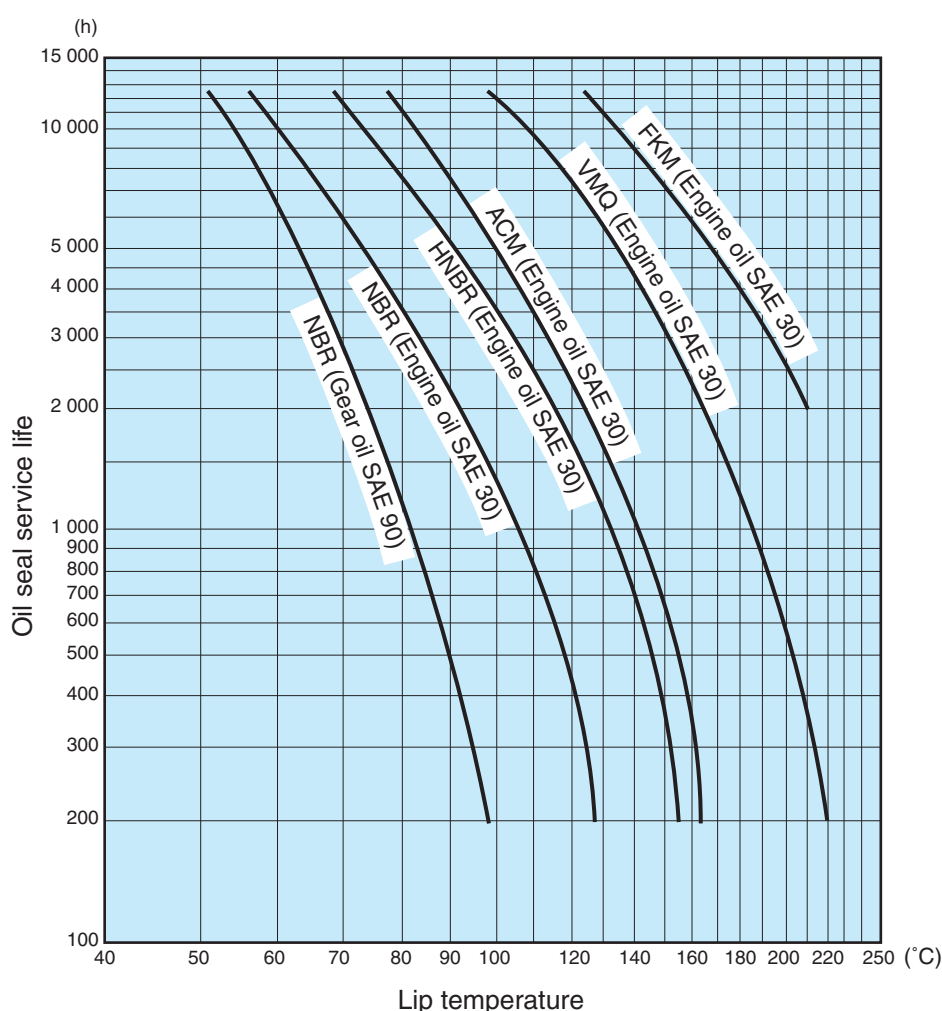


Fig. 1.6.3 Oil seal service life estimation curves

(3) Lip temperature

To determine the seal service life based on the above diagram, it is critical to estimate lip temperature precisely.

As the shaft rotates, the seal lip is heated due to friction. Lip temperature is dependent on the balance between the energy supplied by frictional heat and the radiated energy, which varies according to temperature

difference and the construction surrounding the seal.

Many factors influence lip temperature, so it is difficult to determine this precisely.

The following is the procedure for estimation of lip temperature.

● Lip temperature estimation method

- ① Calculate the peripheral speed at the sealing edge using the following equation

$$v = \frac{\pi d n}{60 \times 1\,000}$$

where,

v : peripheral speed at the sealing edge, m/s
 π : Ratio of circle circumference to diameter (3.14)
 d : Shaft diameter, mm
 n : Rotational speed, min⁻¹

- ② Determine the supposed ambient temperature
- ③ Find the point at which the ambient temperature curve meets the calculated shaft surface speed in Fig. 1.6.4
- ④ Read the ordinate value of the point
- ⑤ Obtain the estimated lip temperature by the sum of the ordinate value and ambient temperature

Example

Shaft diameter: $\phi 50$ mm

Rotational speed: 4 000 min⁻¹

Ambient temperature: 80 °C

Peripheral speed at the sealing edge can be obtained as follows;

$$v = \frac{\pi \times 50 \times 4\,000}{60 \times 1\,000} = 10.5 \text{ m/s}$$

In Fig. 1.6.4, the cross of the curve for ambient temperature 80 °C and peripheral speed 10.5 m/s indicates that the lip temperature rise will be 20 °C.

Therefore, lip temperature is estimated 100 °C (80 + 20 = 100 °C).

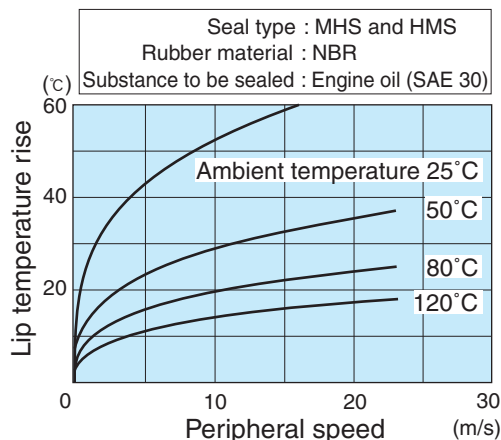


Fig. 1.6.4 Estimated lip temperature rise curves (reference)

(4) Allowable peripheral speed

The sealing edge of the seal should provide constant sealing performance, maintaining contact with the shaft while accommodating runout of the shaft (sum of shaft runout and mounting eccentricity).

When shaft rotation is extremely fast, the sealing edge eventually becomes unable to accommodate runout of the shaft (sum of shaft runout and housing-bore eccentricity), thus deteriorating sealing performance. The speed just before the sealing performance is deteriorated, is called the allowable peripheral speed for seals.

The allowable peripheral speed for seal is mostly influenced by shaft runout. When total eccentricity is small, the allowable peripheral speed is a constant value, depending on the rubber material and seal type.

The diagrams below show the typical allowable peripheral speed for seals mounted on the shaft and housing that are finished to a given level of accuracy.

Figs. 1.6.5 and 1.6.6 show the examples of allowable peripheral speed actually measured with the oil seals attached to the shaft finished with a certain accuracy and housing.

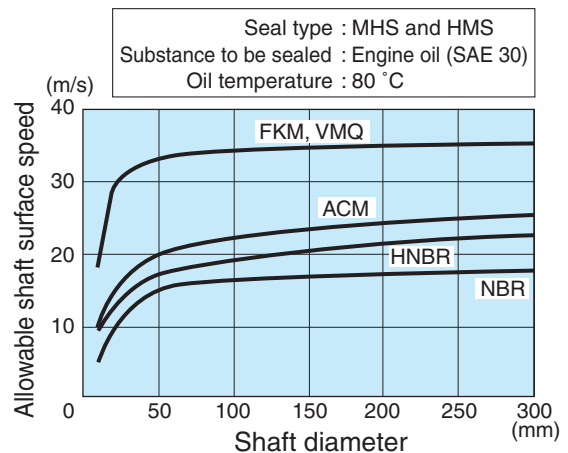


Fig. 1.6.5 Relation between rubber materials and allowable peripheral speed for seal

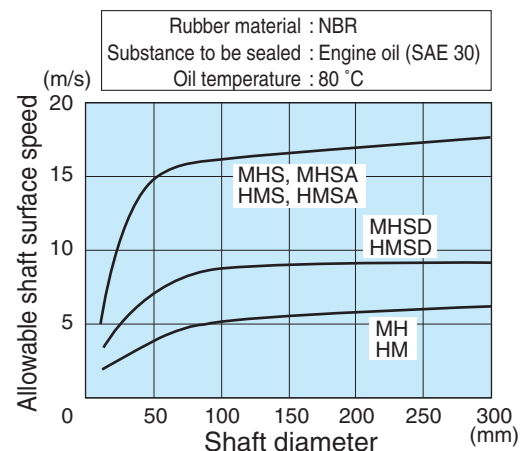


Fig. 1.6.6 Relation between seal types and allowable peripheral speed for seal

(5) Allowable internal pressure

Another factor that may deteriorate seal performance is internal pressure. The allowable internal pressure is also significantly dependent on runout of the shaft (sum of shaft runout and housing-bore eccentricity).

Fig.1.6.7 shows the example of allowable internal pressure actually measured with the oil seals attached to the shaft finished with the accuracy recommended in this catalogue and housing.

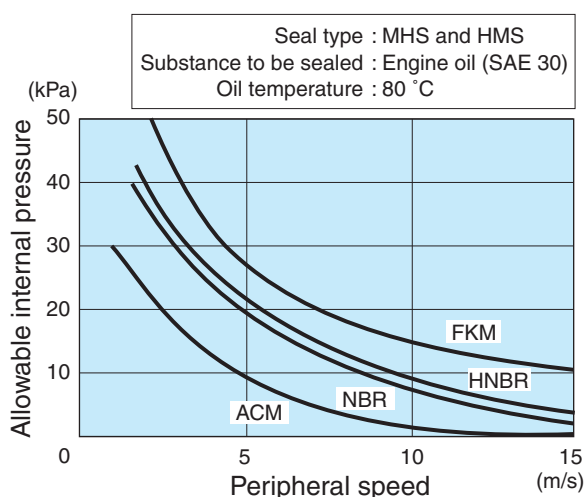


Fig. 1.6.7 Allowable internal pressure for seal

Small talk 3

A precious experience for a new salesman

"The oil seal melts down and oil leaks!"

Receiving an urgent phone call from a customer, a new salesman at JTEKT left the office immediately, believing that something critical had happened.

At the customer's site, the lip was abraded significantly and the rubber did look molten. The customer suspected that the material was the cause of the problem.

Browsing the catalog confusedly, he questioned the customer, remembering the sales-training lectures he had attended before. "How did you lubricate the seal before its initial use?"

Suspecting that insufficient initial lubrication might be the cause, he instructed the customer to coat grease around the lip and run the machine.

Two hours passed, and the seal still showed no leakage. An overhaul proved that the seal was in good condition, with negligible lip abrasion.

"I now thoroughly understand the importance of pre-lubrication," said the customer. It was a precious experience for the salesman as well.

(6) Seal torque

The seal torque is determined by lip radial load, coefficient of friction, and shaft diameter, and can be calculated by the following equation:

$$T = \frac{1}{2 \times 1000} \mu d R_L$$

where,

T : Seal torque, N · m

μ : Coefficient of friction at sealing edge
(including oil viscosity)

d : Shaft diameter, mm

R_L : Lip radial load, N

Lip radial load is determined by three factors: a component of stress caused by circumferential lip elongation that occurs when the seal is mounted on a shaft, a component stress caused by deflection at the lip base, and a component of spring load (Fig. 1.6.8).

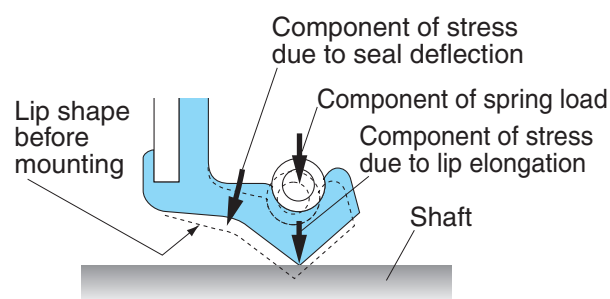


Fig. 1.6.8 Factors of lip radial load

The coefficient of friction at the sealing edge varies significantly depending on type of lubricants used and peripheral speed. To find rotational torques of oil seals, various operating conditions must be taken into consideration. For details, consult JTEKT.

1) Initial seal torque

Seal torque may be very high just after the seal mounting on a machine. However, it will become stable low torque within one or two hours (Fig. 1.6.9).

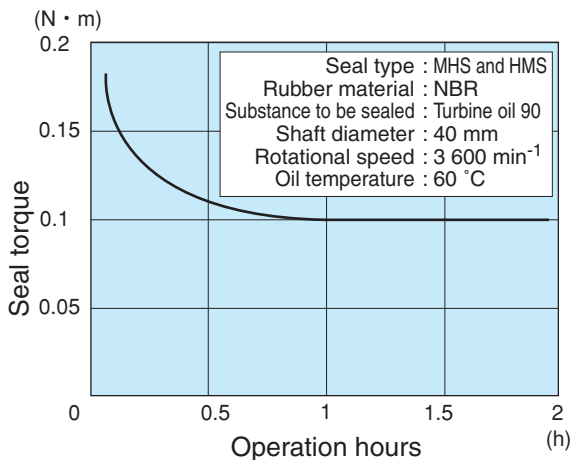


Fig. 1.6.9 Seal torque change with passing time (reference)

Initial high torque occurs because the coefficient of shaft-lip friction is unstable. As operation continues, the shaft and lip become running in each other, it stabilizes the friction coefficient and seal torque.

2) Factors for seal torque

Fig. 1.6.10 shows how rotational speed and lubricant influence seal torque. As this diagram shows, generally seal torque increases in proportion to shaft rotational speed increase. High viscosity lubricating oil also increases seal torque.

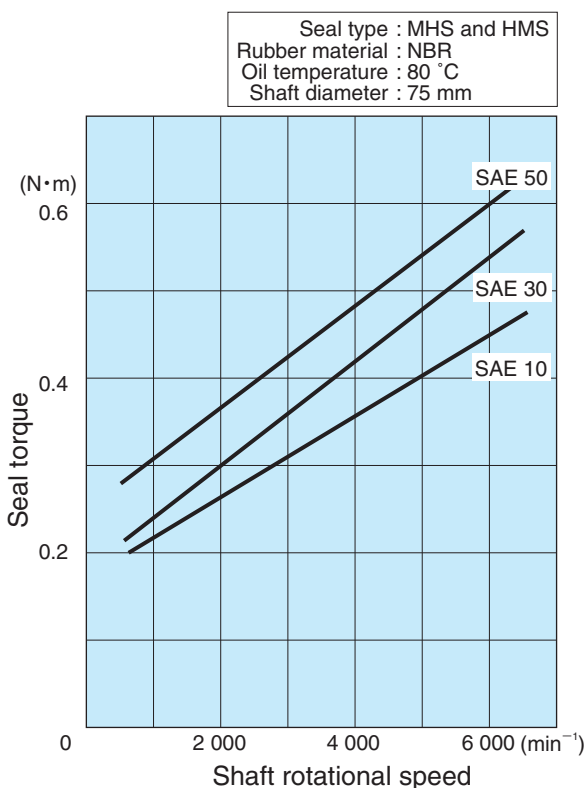


Fig. 1.6.10 Relation between rotational speed and seal torque

Fig. 1.6.11 shows how shaft diameter influences seal torque. The larger shaft diameter, the higher the seal torque correspondingly.

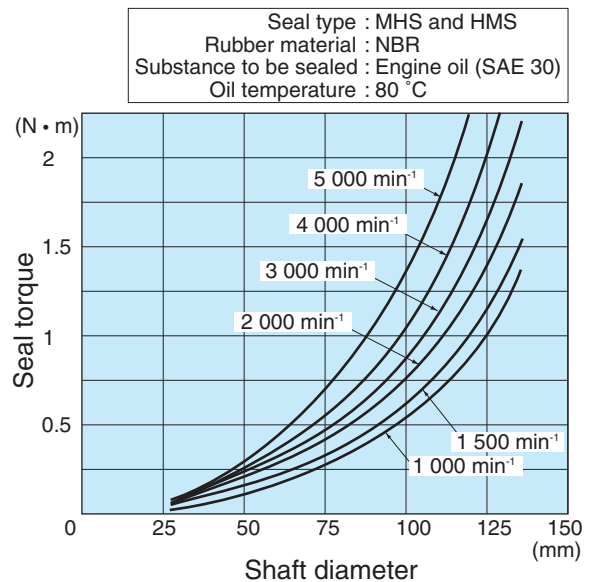


Fig. 1.6.11 Relation between shaft diameter and seal torque

Small talk 4

A discovery on a cold day

A second-year JTEKT sales rep received a harsh complaint from a customer. "Oil seals cannot be easily mounted today! When we press-fit them, the rubber tears."

He checked the seal at the customer's site, but could not find the reason. Then he consulted his manager by phone for advice.

"The seal is having a 'cold'," his manager responded. "Like humans, seals do not enjoy a cold environment. Tell them to warm up the room and try again." Following this advice, a stove was carried into the assembly shop and the seal was tried to remount after being slightly heated. To the surprise of the customer as well as the sales rep, the seal could be mounted smoothly without any problem.

The customer was very grateful to him. "Thank you for dealing with the problem. We also can now work in a warm environment." The sales rep returned to the office, feeling very proud of himself.

Back in the office, he heard another good piece of news from a material engineer: "Recent Koyo oil seals are made of improved material and can operate well in cold environments."

1.7 Handling of seal

Carelessness in seal handling may cause oil leakage. Correct action should be taken for good inwards, storage, transportation, handling and mounting.

(1) Storage

Follow the instructions below in the storing.

- Keep air-conditioned: Room temperature Max. 30 °C and humidity 40% to 70% on average. (See Fig. 1.7.1)
- Keep rule: Use older oil seals stored, first.
- Avoid: Direct/reflected of sunlight, ozone
- When storing oil seals in a worksite, keep them in sealed containers to protect them from dusts, sands, and other contaminations, as well as mechanical damages caused by various equipment or subjects dropped.
- Avoid storing oil seals in a stack or hung as such storage condition can lead to deformation of seal edges due to their own weight.
- When an oil seal is stored for a long time, a white, powdery substance (blooming) may appear on the surface of the rubber, but this does not affect performance.

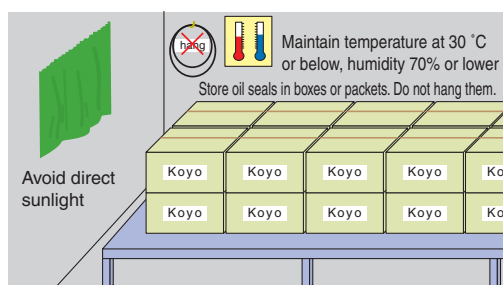


Fig. 1.7.1

(2) Handling

- When carrying oil seals, avoid excessive impact in order to prevent deformation and spring loss.
- Do not damage seals by knife or screw driver when opening wrap.
- Do not place seals for long time on table without sheet cover, due to chance of dust or sand adhesion.
- Do not hang by wire, string, or nail, which deforms or damages seal lip.
- Do not use cleaners, solvents, corrosive fluids, or chemical liquid. Use kerosene when washing seals.

(3) Mounting

- 1) Before mounting, confirm that there is no damage, no dirt or foreign particles on the seals.
- 2) Apply suitable, clean lubricant to the seal lip for initial lubrication. For oil seals with a minor lip, pack clean grease between main lip and minor lip (Fig. 1.7.2).

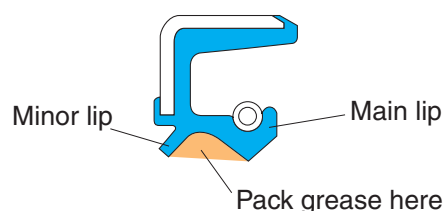


Fig. 1.7.2 Prelubrication for seals with minor lip

- 3) Recommended grease
 - Small penetration (soft grease)
 - Small penetration change by temperature
 - Wide serviceable temperature range
 - Lithium base type (avoid silicone base grease for silicon rubber seal, urea base grease for fluoroc rubber seal which may harden or deteriorate seal rubber)
- 4) When seal is mounted at cold area, warm seal up to have seal flexibility and then mount it.
- 5) To avoid damage on seal lip and shaft surface when seal is mounted onto shaft. Shaft edge should be chamfered or 0.2 mm smaller guide as illustrated below (Fig.1.7.3).


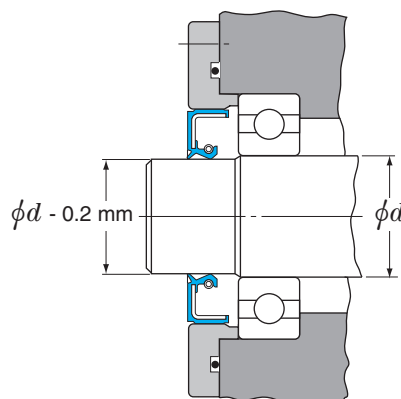


Fig. 1.7.3 Recommended shaft profile and machine construction to avoid damaging shaft surface

- 6) When seal is pressed into housing bore, use pressing jig as shown in Fig. 1.7.4. When press-fitting an oil seal into the housing bore in the opposite direction, use the pressing jig as shown in Figs. 1.7.5 and 1.7.6.

Jig for shouldered housing bore

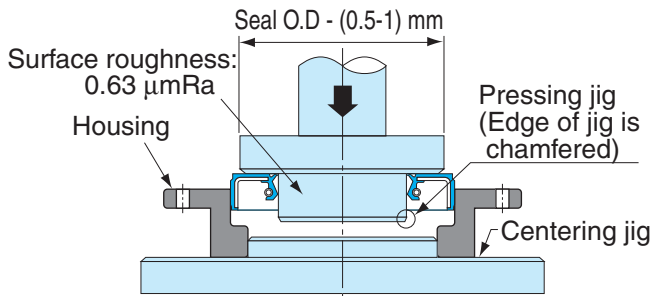

Jig for straight housing bore

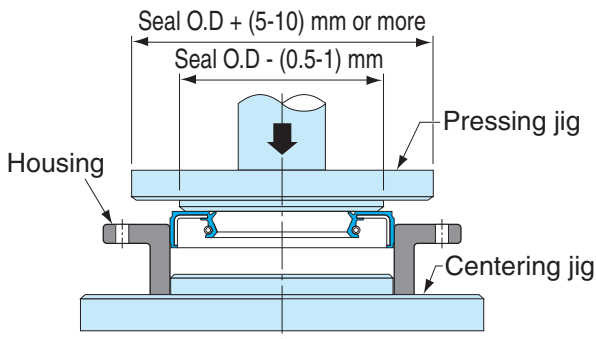


Fig. 1.7.4 Recommended seal press-fitting jigs

Seal press fit at a slant may cause the fit surface to have tear or scuffing and leakage. To ensure good sealing performance, seals need to be mounted at right angles to shafts. For right angled mounting, press the seal down thoroughly to reach the housing shoulder (Fig. 1.7.5).

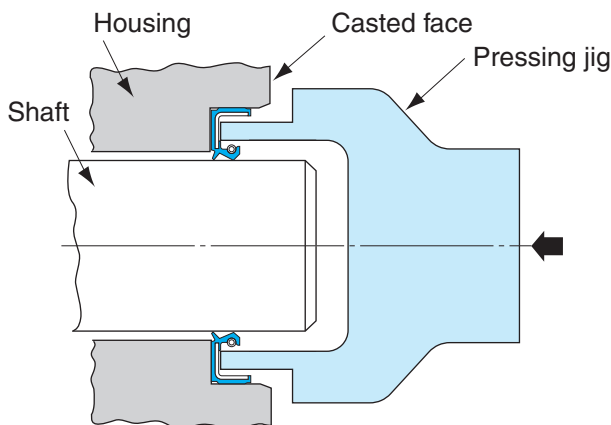


Fig. 1.7.5 Seal press-fitting jig for shouldered housing bore in the opposite direction

To mount seal into a straight housing bore, the jig should be contacted with the machine-finished surface to mount the seal at right angles to the housing bore (Fig. 1.7.6).


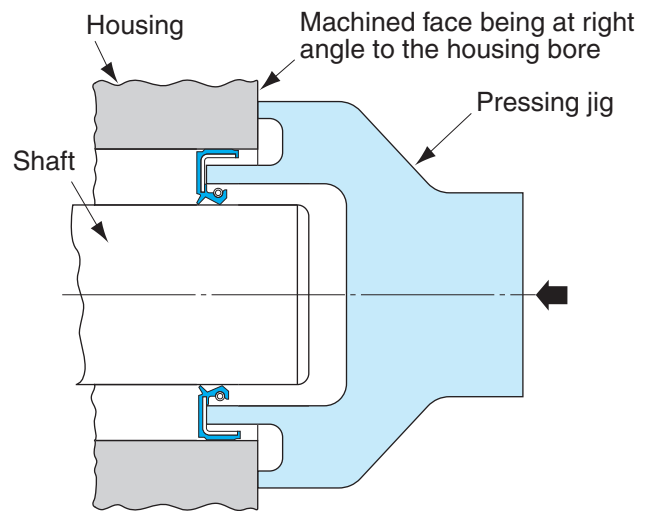


Fig. 1.7.6 Seal press-fitting jig for straight housing bore in the opposite direction

In the case of O.D wall being rubber, press the seal into housing by constant pressure 2-3 times at a constant speed to prevent spring back. Fig. 1.7.7 shows typical seal pressing load required to press-fit an oil seal into the housing. Refer to the shown data when press-fitting oil seals. Based on these diagrams, decide a slightly higher pressing load.

Measuring conditions
No lubricant
Surface roughness of housing bore: 1.6 μmRa

O.D wall: Rubber (Rubber material: NBR)

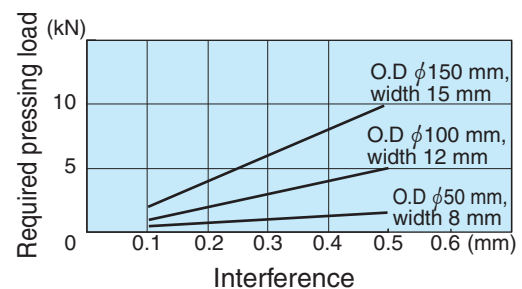

O.D wall: Metal

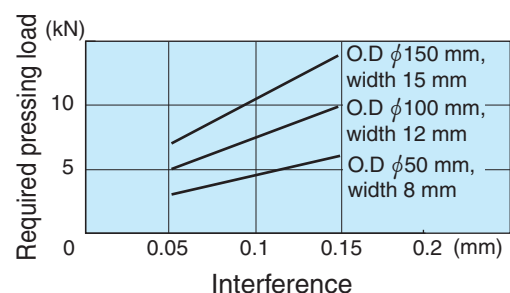


Fig. 1.7.7 Relation between required seal pressing load and seal interference

7) In case of shaft has spline, keyway, or holes, use seal protecting jig to prevent lip damage as illustrated below (Fig. 1.7.8).

If difficult to use jig, remove sharp corners, round the edges and coat enough grease.

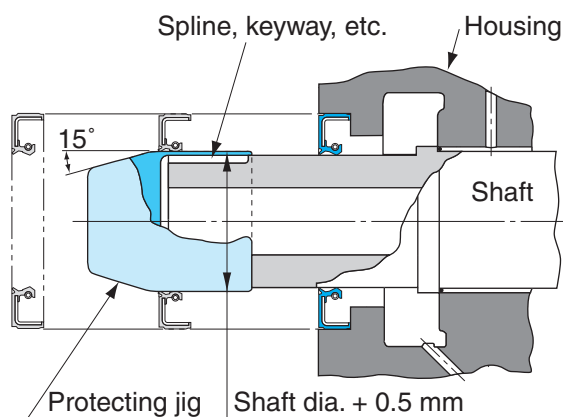


Fig. 1.7.8 Seal protecting jig for spline, keyway, holes on shaft

All the corners of the jig should be chamfered. Do not use a jig made from soft material such as aluminum; such a jig is prone to damages and a damaged jig may scratch the seal lip. Use a protecting jig made from steel or stainless steel.

8) When heavy housing with seal is assembled with shaft, or when long or heavy shaft is inserted into seal, seal damage should be avoided. Use the following guide jig to get centering (Figs. 1.7.9 and 1.7.10).

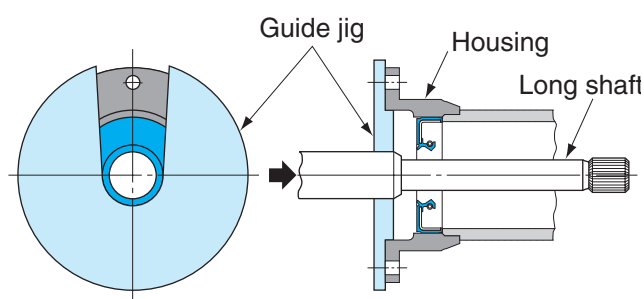


Fig. 1.7.9 Guide jig for inserting of long shaft into seal bore

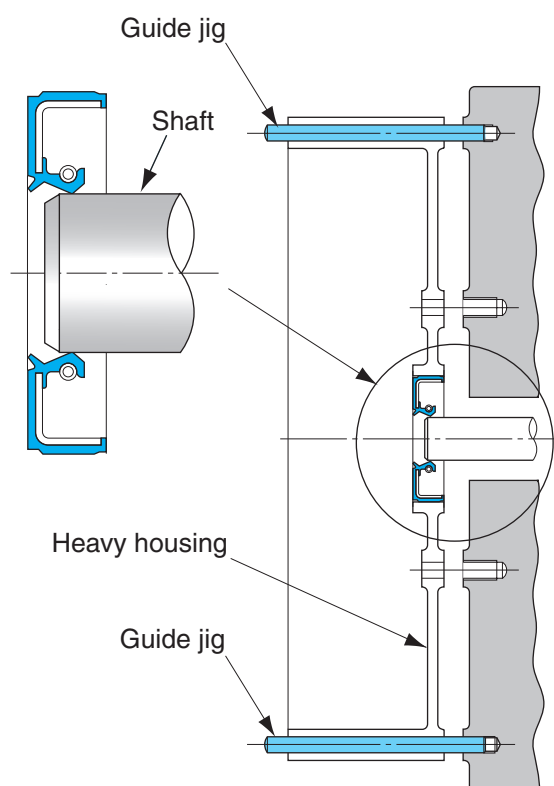


Fig. 1.7.10 Guide jig for mounting of heavy housing with seal onto shaft

If these methods cannot be applied (Fig. 1.7.10), assemble shaft and housing first, then mount seal.

9) When oil seal is removed, use a new oil seal instead of the seal used.

Contact position of new seal lip on the shaft should be displaced to 0.5 mm (1~2 mm for large-size seals) from the old seal lip contact position by applying spacer as illustrated below (Fig. 1.7.11).

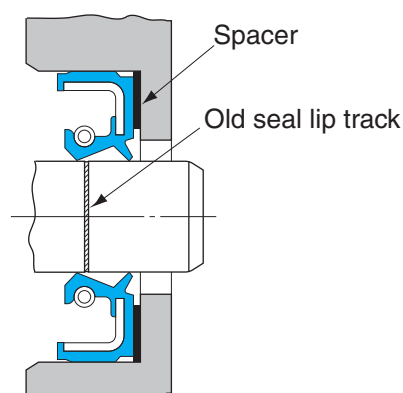


Fig. 1.7.11 Avoid old seal lip track

(4) Mounting of split MS-type seals

MS-type seal has one split in order to have easy mounting on to long shaft or complicated shaped shaft (Fig. 1.7.12).



Fig. 1.7.12 MS-type seal with one split

When fitting the oil seal of this type, do not bond the cut portion of it with adhesive agent. If bonding is absolutely necessary, pay close attention to avoid any step around the seal lip.

Mount a split MS-type seal on to the shaft as following procedure:

- ① Mount the spring first and connect spring by the hook (Fig. 1.7.13).
- ② Mount the seal and position split area to upwards on the shaft.
- ③ Place the spring on the seal spring groove, position spring joint area to 45° apart from seal split area.
- ④ Fix the seal by seal fixing ring. If seal fixing ring is split type, avoid position of ring split area from seal split area.



Fig. 1.7.13 Spring hook connection

(5) Cautions after mounting

- 1) If the area near the oil seal is painted, make sure to keep the seal lip and the shaft area in contact with the lip free from paint.
- 2) Avoid cleaning on the mounted seal area as much as possible. If cleaning is inevitable, perform it quickly and wipe off the detergent immediately when completed.

Small talk 5

A murmur of a female staff member

One day, a female staff member over-heard a conversation:

Third-year sales rep: "The rubber of oil seals is petroleum-based (naphtha-base), isn't it?"

Engineering leader: "Nitrile rubber and acrylic rubber are synthetically produced based on naphtha, but silicone rubber is made from silicon, which can be found naturally. Fluoro rubber is produced synthetically from fluorine compounds extracted from fluorite, which is known for its fluorescent light emission."

"Oh, how knowledgeable our engineering leader is!" murmured the female staff member, impressed.

1.8 Causes of seal failures and countermeasures

(1) Causes of seal failures

To identify the causes of seal failure and take proper measures, it is critical to observe the seal lip closely and evaluate the failure in all respects, such as shaft surface

roughness, contaminants and lubrication. Causes of major seal failure are listed below (Table 1.8.1).

Table 1.8.1 Causes of seal failures

Factor				
1st	2nd	3rd	4th	5th
Leakage from seal	From lip	Damages on lip	Burrs on shaft chamfer Spline, keyway on shaft Entry of foreign materials Wrong handling	
		Lip turned backward	Small shaft chamfer Center off set at mount Excessive inside pressure	
		Missing spring	Small shaft chamfer Center off set at mount Caused by Stick slip*	
		Lip hardened	High oil temperature Poor lubrication Excessive inside pressure	
		Lip softened	Improper rubber Long time dip in cleaner, solvent	
		Heavy wear on shaft	Entry of foreign materials Chemical wear Poor lubrication Caused by Stick slip*	Depends on oil components
		Heavy wear on lip	Poor lubrication Excessive internal pressure Rough shaft surface finish Entry of foreign materials	
		Uneven wear on lip	Excessive eccentricity at mount Inclined seal mounting	
		Rough face, Steaks on lip	Entry of foreign materials Poor lubrication	
		Tear at seal heel bottom	Wrong handling Reaction by impact pressure Excessive inside pressure	
		Lip deformation (small interference)	High oil temperature	
		Lip face contact	Excessive inside pressure Minus pressure between lips Big shaft runout	
		Lip tear	Larger shaft diameter Caused by Stick slip* Reaction by impact pressure	Poor lubrication Improper rubber
		Blisters on lip	Deterioration of lubrication (directly under lip) Mirror finish on shaft surface Higher peripheral speed Higher radial lip load	
		No abnormality on seal	Smaller shaft diameter Improper shaft roughness Damages on shaft Lead machining on shaft Poor lip followability	Small interference Big shaft runout Big eccentricity Small interference Lip high rigidity Poor low temperature resistance
	From fitting area	Peeling, Scuffing, Damages, Deformation,		
		Inclined mounting on seal	Smaller housing bore diameter Small housing bore chamfer Rough housing bore surface finish Improper mounting tool	Large interference
		Oil seal fall-out	Larger housing bore Smaller oil seal O.D Improper oil seal press-fit position	
		No abnormality on seal	Larger housing bore Smaller seal O.D Rough housing bore surface finish Damages or blowholes on housing bore Wrong direction of seal mounting	Small interference Small interference

* Stick slip:

A friction related phenomena in which the sealing element tends to adhere and rotate with the shaft surface momentarily until the elastic characteristics of the sealing element overcome the adhesive force, causing the seal lip to lose contact with the rotating shaft long enough to allow leakage.

This cycle repeats itself continuously and is normally associated with non-lubricated and boundary-lubricated conditions.

(2) Causes of seal failures and countermeasures

Table 1.8.2 below lists the possible causes of seal failures and countermeasures.

Table 1.8.2 Causes of seal failures and countermeasures (1)

Oil leakage from lip (1)





Symptom	Phenomenon	Causes	Countermeasures
Damages on sealing edge	Visible damage on lip edge 	1) Sharp edge or burrs on shaft chamfer 2) Shaft spline or keyway 3) Entry of foreign materials 4) Poor handling	• Remove burrs and polish • Use shaft protecting jig (See Fig. 1.7.8 on page 29.) • Clean work shop • Improve handling manner (Consult JTEKT.)
Lip turned backward		1) Too small chamfer on shaft end 2) Center offset between shaft and housing 3) Excessive inside pressure happened	• Correct shaft chamfer (See Fig. 1.5.1 on page 19.) • Improve center offset (Consult JTEKT.) • Apply high pressure proof seal or breather (vent)
Missing spring		1) Inadequate shaft end chamfer 2) Center offset between shaft and housing 3) Caused by Stick slip	• Improve shaft end chamfers (See Fig. 1.5.1 on page 19.) • Improve center offset (Consult JTEKT.) • Improve lubrication including pre-lubricating on seal
Lip hardened		1) Temperature exceeded seal service temperature range 2) Poor lubrication 3) Excessive inside pressure happened	• Change rubber material to high temperature proof rubber (See Table 1.4.2 on page 16.) • Improve lubricating method and lubricant supply volume • Apply high pressure proof seal or breather (vent)
Lip softening		1) Mis-selection of rubber material 2) Long time dip in cleaning oil or organic solvent	• Change rubber to material not swelling in lubricant (See Table 1.4.2 on page 16.) • To clean the seal, apply the oil used for lubrication as cleaning oil. In an application where grease is used for lubrication, use kerosene as cleaning oil
Heavy wear on shaft		1) Entry of foreign materials 2) Chemical wear due to high temperature or excessive pressure additive 3) Poor lubrication 4) Caused by Stick slip	• Attach prevention device for entry of foreign materials • Take countermeasure to prevent high temperature and change lubricants (Consult JTEKT.) • Improve lubrication on lip including pre-lubricating (Improve quantity of lubricant or lubricating method)

Table 1.8.2 Causes of seal failures and countermeasures (2)

Oil leakage from lip (2)





Symptom	Phenomenon	Causes	Countermeasures
Heavy wear on lip	Rough face, Streaks 	1) Poor lubrication 2) Rough shaft surface finish 3) Entry of foreign materials	• Take pre-lubrication on lip • Improve lubrication • Improve shaft surface finish (See page 19.) • Attach prevention device for foreign materials
	Hardening, Cracks 	Excess heat generation due to 1) Poor lubrication 2) Running under conditions beyond specifications a) Excess peripheral speed b) Excessive inside pressure	• Improve lubrication • Examine cause of heat source • Change rubber to heat proof rubber (See Table 1.4.2 on page 16.) • Apply high pressure proof seal or breather (vent)
	Double-faced wear 	• Excessive inside pressure	• Apply high pressure proof seal or breather (vent)
Lip uneven wear	Wear track width is uneven. Max. wear positions of main lip and minor lip are same. 	1) Center offset between shaft and housing 2) Inclination of shaft	• Examine misalignment for shaft to housing (Take countermeasure to reduce offset)
	Wear track width is uneven. Max. and Min. wear areas are located 180° apart. (Main and minor lips show opposite pattern.) 	Inclined seal was mounted into housing 1) Improper housing bore diameter 2) Improper housing bore chamfer 3) Improper housing bore corner radius 4) Improper mounting tool	• Correct housing bore diameter (See Table 1.5.2 on page 19.) • Correct housing bore chamfer (See Fig. 1.5.3 on page 20.) • Correct housing bore corner radius (See Fig. 1.5.4 on page 20.) • Improve mounting tool (Consult JTEKT.)
Rough face and streaks on lip	Rough face and streaks on sealing edge 	1) Entry of foreign materials 2) Poor lubrication	• Attach prevention device for entry of foreign materials • Improve lubrication

Table 1.8.2 Causes of seal failures and countermeasures (3)

Oil leakage from lip (3)





Symptom	Phenomenon	Causes	Countermeasures
Tear at seal heel bottom		1) Improper handling 2) Excessive inside pressure 3) Reaction by impact pressure	• Improve handling manner (Consult JTEKT.) • Apply high pressure proof seal or breather (vent) • Prevention of impact pressure by design change of machine structure
Lip deformation	Reduction of tightening interference due to rubber hardened 	• Oil temperature rose up during operation	• Change rubber to high temperature proof rubber (See Table 1.4.2 on page 16.) • Examination of and countermeasure against the cause of temperature increase are required.
Lip face contact	Whole lip face shows sliding contact pattern 	1) Excessive inside pressure happened 2) Minus pressure happened between lips 3) Big shaft runout 4) Larger shaft diameter	• Prevent excess pressure (change of machine structure) • Give clearance for minor lip • Improve shaft accuracy • Correct shaft diameter
Lip tear		1) Caused by Stick slip a) No or poor lubrication b) Mirror surface finish on shaft c) Excessive shaft surface speed 2) Impact pressure	• Improve lubrication including pre-lubricating on seal • Correct shaft surface finish to (0.1-0.32) μmRa and (0.8-2.5) μmRz • Review machine structure to reduce impact pressure
Blister	 	• Increased agglomeration of high-temperature oil that entered the sliding surface a) Deterioration of lubrication (directly under lip) b) Mirror finish on shaft surface c) Higher peripheral speed d) Higher radial lip load	• Improve lip lubrication • Correct shaft surface finish to (0.1-0.32) μmRa and (0.8-2.5) μmRz • Reduce radial lip load of oil seal
—	No abnormality on seal but oil leakage is observed	1) Smaller shaft diameter 2) Improper shaft roughness 3) Damages on shaft 4) Lead machining on shaft 5) Poor lip followability a) Big shaft runout b) Big housing-bore eccentricity c) Small interference d) Lip high rigidity e) Poor low temperature resistance 6) Wrong direction of seal mounting 7) Adhesion of foreign particles at mounting	• Improve and correct shaft accuracy • Improve shaft surface finish (0.1-0.32) μmRa and (0.8-2.5) μmRz • Remove sharp corners and burrs, or replace shaft • Change the grinding method (avoid axial feed) • Reduce center offset (Consult JTEKT.) • Improve and correct shaft accuracy • Use low torque seal • Change rubber material to low temperature proof one (See Table 1.4.2 on page 16) • Correct seal direction • Improve handling manner

Table 1.8.2 Causes of seal failures and countermeasures (4)

Oil leakage from seal fitting area (1)





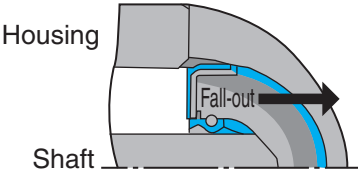






Symptom	Phenomenon	Causes	Countermeasures
Peeling, scuffing on O.D wall		1) Smaller housing bore 2) In adequate housing bore chamfer 3) Rough housing bore surface finish 4) Centering offset between housing and seal mounting	• Correct housing bore diameter (See Table 1.5.2 on page 19.) • Correct housing bore chamfer (See Fig. 1.5.3 on page 20.) • Optimize the housing bore roughness • Improve mounting tool and handling manner (See Figs. 1.7.3 to 1.7.5 on page 27 to 28.)
Damages on O.D wall		1) Burrs on housing bore 2) Damages, or blowholes on housing bore	• Remove burrs, chips • Repair housing bore to eliminate damage, blowhole
Deformation	Deformation 	1) Smaller housing bore 2) Small housing bore chamfer 3) Improper seal mounting tool	• Correct housing bore diameter (See Table 1.5.2 on page 19.) • Correct housing bore chamfer (See Fig. 1.5.3 on page 20.) • Improve mounting tool (Consult JTEKT.)
Seal inclined mounting	Uneven fitting marks on seal O.D face 	1) Smaller housing bore 2) Small housing bore chamfer 3) Poor parallel accuracy between mounting tool and housing	• Correct housing bore diameter (See Table 1.5.2 on page 19.) • Correct housing bore chamfer (See Fig. 1.5.3 on page 20.) • Improve mounting tool (Consult JTEKT.)
Oil seal fall-out	Housing  Shaft	1) Larger housing bore 2) Smaller oil seal O.D 3) Improper oil seal press-fit position 4) Deformation of housing	• Use appropriate housing bore diameter (See Table 1.5.2 on page 19.) • Optimize the oil seal outer dimensions • Improve the outer circumference design (metal O.D wall, HR seal) • Correct the oil seal press-fit position (Consult JTEKT.) • Improve the rigidity of housing

Table 1.8.2 Causes of seal failures and countermeasures (5)

Oil leakage from seal fitting area (2)

Symptom	Phenomenon	Causes	Countermeasures
–	No abnormality on seal but oil leakage is observed	1) Larger housing bore 2) Smaller seal O.D 3) Rough housing bore surface finish 4) Damages or blowholes on housing bore 5) Wrong direction of seal mounting	• Correct housing bore diameter (See Table 1.5.2 on page 19.) • Replace seal • Improve housing bore surface finish (See Table 1.5.3 on page 20.) (In urgent cases, apply liquid gasket to housing bore.) • Remove damages and blowholes • Correct seal direction

1.9 Seal dimensional tables (Contents)

	Type					Page
Standard type seals	Metal O.D wall seals d_1 7~540					38
	Rubber O.D wall seals d_1 6~300					
Special seals	YS type seals d_1 220~1 640					56
	Assembled seals d_1 41~440					72
	Full rubber seals d_1 10~3 530					78
	MORGOL seals Seal inner rings d_1 167~1 593					84
	Scale seals Scale covers d 195~1 595					86
	Water seals d_1 219.2~1 460					90
	V-rings d 38~875					92

The cross-sectional view indicates a representative oil seal shape.

- 1) For seals marked **●**, JTEKT owns moulding dies for production.
- 2) The cross-sectional view indicates a representative oil seal shape.
- 3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).
Example: HMSA55729(55×72×9 mm).
- 4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.
- 5) Consult JTEKT separately for information on inventory, delivery, and production lots.

										Metal O.D wall								Rubber O.D wall																								
Boundary dimensions, mm.			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA											
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F								
6	14	4																																								
7	20	7									•																				•											
8	14	4																	•																							
	18	4																	•																							
	18	7																													•											
	18	9									•																															
	22	5																	•																•							
22	7																																	•								
9	22	7																													•								•			
10	17	6																	•																							
	18	5																													•											
	20	4	•																•								•															
	20	5													•																											
	20	7									•																•				•								•			
	21	8																																	•							
	22	5																																					•			
	22	8									•																												•			
	25	5	•																																							
	25	7																																								

				Metal O.D wall																Rubber O.D wall																							
Boundary dimensions, mm				HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA											
d ₁	D	b		N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F								
13	25	7																																									
	28	5	●																																								
	28	7																										●								●							
	30	8																										●								●							
	30	9										●																															
14	20	3						●																																			
	24	6																		●								●				●				●							
	24	7										●																								●							
	25	4	●																																								
	26	7																										●															
	28	7										●																								●							
	32	9																																		●							
15	20	5						●																																			
	21	3						●							●																												
	22	4	●																																								
	22	7																																									
	23	3						●																																			
	24	4.5						●																																			
	24	7										●																															
	25	4	●				●																																				

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.


2) The cross-sectional view indicates a representative oil seal shape.


3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (16)~(19)																																				
Metal O.D wall										Rubber O.D wall																										
																																				
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA					
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F		
16	30	7									●				●												●								●	
	30	8									●																●									
	32	8									●																									
	35	7									●																									
	35	9									●																									
17	23	3																																		
	24	5	●																																	
	28	5																																		
	28	6																																		
	28	7									●															●								●		
	30	5	●			●	●								●											●										
	30	6									●			●	●	●									●	●	●	●			●	●				
	30	7									●															●										
	30	8									●			●		●									●				●							
	32	7																									●									
	32	8									●				●																					
	35	5																																		
	35	6																									●									
	35	7									●				●											●							●			
	35	8													●											●								●		
	38	10																									●									
	40	8									●															●										
18	24	4																																		
	28	4																																		
	30	5	●																																	
	30	7									●															●										
	30	8																							●							●				
	32	8																															●			
	35	6	●																																	
	35	7																																		
	35	8									●															●								●		
	35	9									●																									
	36	10																									●							●		
	38	7																																		
38	10									●																										
19	27	4																																		
	30	7																																		
	30	8									●																									

d_1 (19)~20																																		
Metal O.D wall													Rubber O.D wall																					
																																		
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
19	32	8																												●				
	35	5																												●				
	35	6																●																
	35	7																																
	35	8											●																●	●				
	38	7											●															●						
20	38	10											●																					
	40	6	●																															
	26	6	●																															
	27	4																																
	28	4								●																								
	28	6																																
	30	4																																
	30	4.5																																
	30	5																																
	30	7																																
	30	9																																
	32	5	●				●																											
	32	6	●																															
	32	7																																
	32	8																																
	34	7																																
	35	4.5																																
	35	5	●																															
	35	6	●																															
	35	7																																
	35	8																																
	35	10																																
	36	5																																
	36	7																																
	38	8																																
	40	5																																
	40	7																																
	40	8																																
	40	10																																
	40	11																																
	42	6																																
	42	8																																
	45	12																																
	47	5																																
	47	6	●																															
	47	7																																
	52	8																																

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d ₁ 21~(25)																																		
Metal O.D wall												Rubber O.D wall																						
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d ₁	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
21	40	7																												●				
22	28	4	●																															
	29	4																																
	30	4	●				●																											
	32	7																																
	34	5													●																			
	35	5	●		●										●																			
	35	7									●		●																					
	35	8									●																							
	36	10									●																							
	38	8									●																							
40	11																																	
42	5													●																				
42	7									●																								
42	10									●			●																					
42	11									●																								
23	35	6																																
24	35	6									●																							
	35	7											●																					
	35	8									●																							
	38	5	●												●																			
	38	8									●			●																				
	38	10									●																							
	40	6	●																															
	40	8									●																							
25	32	4													●																			
	32	8									●																							
	33	4					●																											
	35	5	●		●										●																			
	35	6																																
	35	7									●																							
	35	8									●																							
	38	5	●		●	●									●																			
	38	7									●		●	●	●																			
	38	8									●				●																			
	40	5	●		●																													
	40	6	●																															
	40	7												●																				

d_1 (25)~(28)																																		
Metal O.D wall										Rubber O.D wall																								
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
25	40	8									●			●	●									●	●	●	●	●	●	●				
	40	10																									●	●	●	●				
	42	5																				●												
	42	8									●																●							
	44	7									●		●																					
	45	5	●												●																			
	45	7									●			●													●							
	45	8									●			●										●	●		●	●	●					
	45	10									●			●										●			●							
	45	11																						●		●			●					
	47	5	●												●				●								●							
	47	6	●								●			●					●								●							
	47	7																							●			●						
	47	8												●													●							
	48	8									●														●			●						
	50	9																							●									
50	12									●			●											●		●								
52	7																							●			●							
52	10									●																	●							
52	12									●																	●							
62	11																									●	●	●						
26	36	8											●												●			●						
	38	8								●		●												●			●							
	40	7										●															●							
	40	8																							●									
	42	8								●			●											●	●	●	●	●						
	45	7																						●			●							
	48	11								●			●																					
27	40	8								●		●																						
	47	11								●														●										
28	35	5													●																			
	37	6	●																															
	38	7								●			●																					
	38	8								●																								
	40	5	●												●			●																
	40	7																								●								
	40	8								●	●		●											●		●	●	●						
	42	8																							●	●	●							
	44	8											●												●									
	44	11								●		●																						
	45	6	●												●																			
	45	8								●				●										●		●	●	●						
	47	8																									●							

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.


2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (28)~(30)																																		
Metal O.D wall										Rubber O.D wall																								
																																		
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
28	48	5	●																															
	48	7																												●				
	48	8																												●				
	48	11												●		●										●			●					
	50	6	●																															
30	37	3.2													●																			
	39	7									●		●																					
	40	5	●												●																			
	40	7									●												●					●						
	42	5	●		●	●									●										●				●					
	42	7																										●						
	42	8									●			●	●										●		●	●						
	44	7													●													●	●					
	44	9									●				●										●									
	45	6	●		●											●																		
	45	7												●														●						
	45	8									●	●		●											●		●	●		●				
	45	12									●														●									
	46	5													●																			
	46	7																										●	●					
	47	8																							●		●		●					
	47	12										●																						
	48	7																											●					
	48	8										●																						
	50	5														●																		
	50	7										●																	●					
	50	8										●			●											●	●	●	●					
	50	10										●														●								
	50	11										●		●	●	●									●		●			●				
	50	12										●																						
	52	8																											●					
	52	10																							●									
	52	12										●													●									
	55	5														●																		
	55	12										●													●				●					
	56	5	●													●																		
	62	7																											●					
62	8																											●						

d_1 (30)~(35)			Metal O.D wall																Rubber O.D wall															
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F
30	62	10																																
	43	7																																
	43	10																																
	44	9																																
	45	5	●																															
	45	7																																
	45	8																																
	46	8																																
	47	8																																
	48	8																																
	52	5																																
	52	8																																
52	11																																	
54	10																																	
33	50	7																																
	42	5																																
	44	8																																
	46	8																																
	48	8																																
	50	7																																
34	54	11																																
	42	5																																
	44	8																																
	46	8																																
	48	8																																
	50	7																																
35	54	11																																
	45	5	●																															
	47	5	●																															
	47	7																																
	48	5																																
	48	7																																
	48	8																																
	50	6	●																															
	50	7																																
	50	8																																
	50	11																																
	52	5																																
	52	7																																
	52	8																																
	52	9																																
	52	10																																
	52	11																																
	52	12																																
	55	5	●																															
	55	7																																
	55	8																																
	55	9																																
55	11																																	

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.




2) The cross-sectional view indicates a representative oil seal shape.



3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (35)~(40)																																		
Metal O.D wall										Rubber O.D wall																								
																																		
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
35	55	12																																
	60	12									●				●															●				
	62	10									●			●																●				
36	50	7									●																							
	50	10									●																							
38	45	8					●																											
	50	5	●																															
	50	8									●																							
	52	6					●																											
	52	9																																
	55	6	●																															
	55	8									●				●																			
	55	9									●				●																			
	58	5														●																		
	58	7									●																							
58	8													●																				
58	11									●				●															●					
40	50	6																		●														
	52	5	●			●	●									●																		
	52	7													●															●				
	52	8									●				●											●				●				
	55	7													●																			
	55	8									●				●											●								
	55	9									●																							
	58	6														●																		
	58	7																																
	58	8									●				●											●				●				
	58	10																																
	60	8									●															●								
	60	12									●															●								
	62	5	●																															
	62	7													●															●				
	62	8									●															●				●				
	62	10																		●														
	62	11									●			●	●	●										●								
62	12									●			●		●										●	●			●					
65	5	●																																
65	12																									●								

d_1 (40)~(50)																																		
Metal O.D wall										Rubber O.D wall																								
																																		
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
40	65	14									●																●				●			
	75	12																												●				
41	65	9									●																							
42	55	6	●				●																											
	55	7												●													●			●				
	55	9									●			●																●				
	58	10																								●								
	60	7	●																															
	60	9									●	●			●											●				●				
	65	7																																
	65	9									●																●							
	65	12									●	●			●	●										●				●				
	44	60	9																											●				
45	55	4	●																															
	60	6	●			●										●																		
	60	7									●				●																			
	60	9									●		●	●	●										●			●	●					
	61	9									●	●		●																				
	62	6					●																											
	62	7	●			●																							●					
	62	9									●		●	●	●										●			●	●					
	62	10									●																							
	65	5	●	●												●																		
	68	6	●																															
	68	7																												●				
	68	9									●														●		●		●					
	68	12									●			●										●	●		●		●					
70	12																						●		●		●							
70	14									●			●										●		●		●							
71	6.5	●																																
72	12													●														●						
47	62	11																		●														
48	62	6	●													●																		
	62	9									●																		●					
	65	9									●			●	●									●				●						
	70	7												●														●						
	70	9									●			●										●			●		●					
	70	12									●	●		●	●									●			●		●					
50	64	10									●																		●					
	65	6	●			●	●									●																		
	65	7											●																					
	65	9									●			●				●										●		●				
68	7														●																			

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (50)~(58)																																		
Metal O.D wall										Rubber O.D wall																								
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
50	68	9									●			●	●											●		●	●		●			
	70	10									●			●											●		●		●					
	70	12									●														●		●		●					
	72	5													●																			
	72	6	●																															
	72	7												●														●						
	72	9									●			●											●		●							
	72	10												●																				
	72	12									●	●	●	●	●		●								●	●	●	●		●				
	72	14																																
	75	12									●																							
	80	7	●																															
80	14									●					●										●	●		●						
51	63	6					●																											
52	65	6													●																			
	70	9									●			●											●		●							
	75	9												●																				
	75	12									●			●											●									
53	78	12																						●			●							
55	70	6	●		●	●									●																			
	70	7												●																				
	70	9									●			●													●							
	72	7	●		●									●													●							
	72	9			●						●				●	●	●								●	●		●						
	74	6	●																															
	75	12									●																							
	78	6													●																			
	78	7												●														●						
	78	9									●			●											●		●	●						
78	12									●	●	●	●	●		●							●	●	●	●	●		●					
80	12									●	●			●									●			●								
85	7	●			●																													
85	14									●			●											●	●	●		●						
56	70	6	●																															
	78	9																										●						
	78	12									●			●													●							
58	72	6	●												●																			
	72	9									●																	●						

d_1 (58)~(70)																																		
Metal O.D wall										Rubber O.D wall																								
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
58	75	9									●				●												●							
	80	9									●															●								
	80	12									●			●											●				●					
60	75	6	●			●					●		●		●				●						●				●					
	75	9									●		●		●									●				●						
	75	10									●		●	●										●				●						
	78	7									●																●							
	78	9									●		●	●										●			●		●					
	80	12									●			●										●			●		●					
	82	6	●																															
	82	7									●				●												●							
	82	9									●			●										●		●		●		●				
	82	12									●			●										●		●	●	●		●				
	82	14											●																					
	85	12									●													●	●									
	90	7	●																															
	90	11																										●						
	90	12																										●		●				
90	14									●			●											●	●	●	●		●					
62	75	6									●																							
	75	9									●																							
	80	9									●																●							
	85	12									●			●										●		●		●		●				
63	80	9											●														●							
	85	8											●																					
	85	12									●			●										●			●							
65	80	6																																
	82	8									●																							
	82	10									●			●										●			●							
	85	10									●																							
	85	12									●																							
	88	6	●			●																												
	88	8																										●						
	88	12									●		●											●	●	●	●	●	●	●				
	90	8											●																					
	90	10																						●										
68	90	12									●			●										●			●							
	95	13									●			●										●										
70	82	12											●																					

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (70)~88																																		
Metal O.D wall												Rubber O.D wall																						
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
70	85	6	●												●																			
	88	12								●				●											●			●	●	●				
	90	10	●																															
	90	12								●															●									
	92	7	●		●										●																			
	92	8												●														●						
	92	12								●				●				●						●		●	●	●		●				
	95	8												●														●						
	95	13												●				●							●		●	●	●					
100	14									●			●											●			●							
71	95	13								●																								
72	100	12								●			●																					
73	95	14								●																								
75	90	6	●																															
	100	7	●												●																			
	100	8												●														●						
	100	13								●				●				●						●		●			●					
	105	15								●				●										●		●								
77	93	10											●																					
80	100	7	●												●																			
	100	8								●			●															●						
	100	10								●	●		●											●	●	●	●	●		●				
	100	12																								●		●						
	105	8	●											●													●							
	105	13								●	●			●	●	●	●	●						●		●	●	●		●				
	105	15												●																				
	110	15												●																				
85	115	15								●				●										●				●						
	100	6	●																															
	100	13								●			●																					
	105	13								●			●											●										
	105	15								●				●																				
	110	7																																
	110	8	●																															
88	110	9												●														●						
	110	13								●			●											●	●	●	●	●		●				
	120	15								●			●																					
	115	13								●																								
	88	115	13																															

d_1 90~(130)																																		
Metal O.D wall										Rubber O.D wall																								
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
90	100	7													●				●															
	105	6	●																															
	115	5													●																			
	115	8	●																															
	115	9																																
	115	13									●	●	●	●	●											●	●			●				
	115	15									●														●		●							
	120	13									●		●																					
	125	15									●		●												●									
95	115	13									●																		●					
	115	16									●																							
	120	8	●																															
	120	9																										●						
	120	13									●	●		●											●		●	●	●	●				
	130	13									●																	●	●	●				
	130	15									●		●												●			●		●				
100	120	12									●																							
	125	8	●																															
	125	13									●		●		●										●	●	●	●	●	●				
	125	15											●																					
	135	15									●		●												●			●		●				
105	130	13									●	●	●												●				●					
	135	9																										●						
	135	14									●		●	●	●									●		●		●	●	●				
	140	15									●													●										
110	140	8	●																															
	140	14									●		●		●									●		●		●						
	145	15									●		●											●			●		●					
112	145	14																										●						
115	145	14									●	●	●		●									●		●								
	150	16									●																							
120	135	7	●																															
	150	9																										●						
	150	14									●		●		●		●	●						●	●	●	●	●	●					
	155	16									●		●											●				●	●	●				
125	155	14									●	●	●		●									●				●	●	●				
	155	16											●																					
	160	16									●													●										
130	150	11																										●						
	160	9											●														●							
	160	14									●		●	●	●									●		●		●		●				
	160	16											●																					

Standard types
 d_1 (130)~(280)

HM HMA HMS HMSA
MH MHA MHS MHSA



- Remarks
- 1) For seals marked ●, JTEKT owns moulding dies for production.
 - 2) The cross-sectional view indicates a representative oil seal shape.
 - 3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).
Example: HMSA55729(55×72×9 mm).
 - 4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.
 - 5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (130)~(190)																																		
Metal O.D wall										Rubber O.D wall																								
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F				
130	170	16									●		●													●								
135	165	14									●		●		●											●		●	●	●				
	175	16									●																							
140	160	14									●			●												●			●	●				
	170	14									●			●												●		●	●	●				
	185	16									●		●													●			●	●				
145	175	12									●															●			●	●				
	175	14									●				●	●	●	●								●			●	●				
	190	16									●																●			●				
150	180	12									●			●												●			●	●				
	180	14									●	●		●	●	●	●	●								●			●	●				
	180	16									●				●											●			●	●				
155	180	15									●																		●	●				
	185	15									●																		●	●				
	200	20									●		●		●		●											●	●	●				
160	190	12									●			●												●			●	●				
	190	14									●		●	●	●	●	●									●			●	●				
	190	16									●	●	●		●	●										●		●	●	●				
165	195	14									●															●			●	●				
	220	20									●															●			●	●				
170	200	12									●				●											●			●	●				
	200	16									●				●											●		●	●	●				
	205	12									●				●											●			●	●				
	205	16									●	●														●			●	●				
	205	18									●				●											●			●	●				
	210	15									●				●											●			●	●				
	225	16									●				●											●			●	●				
	225	20									●				●											●			●	●				
175	230	20									●															●			●	●				
180	210	12									●																		●	●				
	210	15									●																		●	●				
	210	16									●			●		●	●	●								●			●	●				
	215	16									●	●	●	●												●			●	●				
	215	18									●				●														●	●				
	220	15									●																		●	●				
	225	20									●				●														●	●				
	235	20									●																		●	●				
190	220	14									●		●																●	●				

d_1 (190)~(280)																																			
Metal O.D wall										Rubber O.D wall																									
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA				
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	
190	220	15																																	
	225	16									●			●	●	●		●									●								
	245	22											●																						
200	230	15									●																	●							
	235	16									●																								
	235	18													●																				
	240	20									●			●	●		●														●			●	
	255	22									●																								
205	260	23									●																								
210	240	15									●																	●							
	250	16									●			●	●		●																		
	250	18									●																								
	250	20									●			●		●		●	●																
	265	23									●				●																				
	220	250	15								●		●		●													●							
220	250	16									●																				●			●	
	255	16									●				●												●	●					●		
	255	18									●				●												●	●					●	●	
	260	20									●						●		●								●	●							
	260	22									●				●		●		●	●							●	●							
	275	23									●																								
	230	255	15								●																								
	260	15									●				●												●								
260	20									●				●				●																	
240	270	16																													●		●	●	
	270	20																												●	●	●	●	●	
	285	23									●																								
	270	15									●			●													●								
	270	20																												●					
250	270	15									●			●													●								
	270	20																												●					
	275	16									●			●	●											●				●					
	275	18													●																				
	280	19									●			●	●																				
250	280	15									●																●								
	285	18													●											●				●	●	●			
	310	25									●			●													●								
260	300	20																									●				●				
	320	25									●			●	●				●								●								
270	330	25												●	●			●	●																
	345	15																														●			
280	310	16																													●				
	320	18									●			●																					
	320	22													●															●					
	330	24																													●				

Remarks

1) For seals marked ●, JTEKT owns moulding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: HMSA55729(55×72×9 mm).

4) Rubber code N represents nitrile rubber, A: acrylic rubber, S: silicone rubber, and F: fluoro rubber.

5) Consult JTEKT separately for information on inventory, delivery, and production lots.

d_1 (280)~670

Metal O.D wall																Rubber O.D wall																		
Boundary dimensions, mm			HM				HMA				HMS				HMSA				MH				MHA				MHS				MHSA			
d_1	D	b	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F	N	A	S	F
280	340	28									●				●			●																
290	330	15																									●							
	330	18									●																							
	350	25									●			●	●	●	●	●																
300	340	22																																●
	345	22									●																							
	360	25									●				●		●																	
310	370	28													●																			
320	360	20													●				●															
	360	25									●																							
	380	25									●																							
	380	28													●		●																	●
340	380	20									●																							●
	400	25									●																							
	400	28													●																			
350	390	20																																●
360	400	17																										●						
	420	25									●			●	●																			
370	415	20									●																							
380	440	25									●																							
	440	28																																●
395	430	18									●																							
420	480	25									●			●																				
	480	28																																●
460	500	20																																●
540	600	25																	●															
670	710	20																																●

- Remarks
- 1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.
- 5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

d_1 220~(310)

			Seal type									
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
220	255	16				●						
230	264	16				●						
240	275	16				●						
250	285	16				●						
255	315	25	●									
265	305	18	●			●						
270	330	25	●									
280	320	18	●			●						
	330	20	●※									
	340	25	●			●						
290	330	18	●									
	340	20	●									
	350	25	●									
300	350	28							●			
	340	18	●	●		●	●					
	340	20	●									
	340	25	●									
	345	20	●									
	345	22	●									
	350	20	●※									
	350	25	●									
305	350	29							●			
	360	25	●			●						
	360	28							●			
304	342.1	17.5	●※									
304.8	342.9	17.5	●※									
	355.6	20.6	●									
	355.6	25.4	●									
305	355	23	●									
	355	25	●									
310	350	18	●									

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1

YS 320 360 18 D5

Spacer width: 5 mm

Example 2

YS 320 360 18 2D5

Spacer width: 5 mm

d_1 (310)~335

			Seal type									
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
310	350	19	●									
	350	20	●			●						
	360	20	●									
	360	25	●						●			
	370	25	●	●		●			●※			
315	370	28	●						●			
	355	20	●									
	360	20	●									
	365	20	●									
	375	25	●									
320	375	28							●			
	360	18	●			●						
	360	20	●									
	360	25	●		●	●						
	370	20	●									
320.68	370	25	●									
	380	25	●						●			
	380	28							●	●		
	371.48	25.4	●									
	365	20	●									
325	375	25	●									
	370	18	●									
330	370	20	●									
	370	25	●									
	380	25	●									
	390	25	●			●						
	390	28							●			
330.2	368.3	17.5	●※									
335	375	20	●									
	385	25							●			
	395	28							●			

Remarks

1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.

5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1

YS 320 360 18 D5




Spacer width: 5 mm


Example 2

YS 320 360 18 2D5



Spacer width: 5 mm

d_1 336.6~365			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
336.6	374.65	17.5	●※											
340	380	18	●			●								
	380	20	●	●			●							
	380	25	●											
	384	20	●											
	390	20	●											
	390	25							●					
	400	25	●	●		●			●					
	400	28							●					
342.9	381	17.5	●											
	393.7	20.6	●											
	393.7	25.4	●											
350	390	16				●								
	390	18	●											
	390	20	●											
	400	17	●											
	400	25	●						●					
	410	25	●											
	410	28							●	●				
355	405	25	●						●					
	415	28							●					
355.6	406.4	20.6	●※											
	406.4	25.4	●											
360	400	17	●			●								
	400	18	●			●								
	400	20	●											
	400	25	●											
	410	25	●						●					
	420	25	●						●					
	420	28							●	●				
365	405	18	●											

d_1 370~(400)			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
370	410	18	●	●										
	410	20	●											
	410	25	●											
	415	20	●	●										
	420	20	●											
	420	25	●								●			
	430	25	●								●			
	430	28												
374.65	419.1	22.2	●											
375	420	18	●											
	420	20	●											
	435	28									●			
380	420	18	●											
	420	20	●											
	420	25	●											
	430	25	●											
	440	25	●											
	440	28									●			
381	419.1	17.5	●											
	431.8	20.6	●※											
	431.8	25.4	●											
385	425	18	●											
387.4	425.15	17.5	●※											
390	430	18	●											
	430	20	●											
	440	20	●											
	440	25	●								●			
	450	25	●								●			
	450	28									●			
393.7	431.8	19	●											
400	440	18	●											

Remarks

1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.

5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1



YS 320 360 18 D5




Spacer width: 5 mm


Example 2

YS 320 360 18 2D5



Spacer width: 5 mm

d_1 (400)~(425)			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
400	440	20	●											
	444	20	●											
	450	20	●											
	450	25	●						●					
	460	25	●						●					
	460	28							●					
400.05	438.15	15				●								
	438.15	17.5	●			●								
405	455	25	●											
406.4	444.5	19	●											
	450.85	22.2	●						●※					
	457.2	20.6	●			●								
	457.2	23	●			●								
	457.2	23.8	●※											
410	450	20	●											
	460	25	●						●					
	470	25	●		●									
	470	28							●					
	480	25	●											
415	475	23	●											
419.1	457.2	19.1	●											
420	460	18	●											
	460	19	●											
	460	20	●			●								
	460	25	●											
	470	20	●											
	470	22	●※											
	470	25	●	●					●					
	480	25	●						●					
425	465	20	●											

d_1 (425)~460			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
425	485	28							●					
430	470	20	●			●								
	480	20	●											
	480	25	●						●					
	490	25	●			●								
	490	28							●					
431.8	469.9	19	●											
432	476	20	●											
438.2	476.25	19	●											
440	480	20	●			●								
	490	17	●											
	490	20	●											
	490	22	●※											
	490	25	●											
	500	25	●											
	500	28							●					
444.5	495.3	25.4	●											
450	490	19	●											
	490	20	●											
	500	20	●											
	500	25	●			●			●					
	510	25	●	●					●					
452.6	501.65	19.1	●※											
	504.82	19	●											
457.2	508	19.1	●											
460	500	20	●			●								
	510	20	●											
	510	25	●											
	520	25	●	●					●					
	520	28												

Remarks

1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●* have suffix -1.

5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1

YS 320 360 18 D5




Spacer width: 5 mm


Example 2

YS 320 360 18 2D5



Spacer width: 5 mm

d_1 463.6~510			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
463.6	501.65	19.1	●											
465	510	20	●											
	515	25							●					
467	510	20	●											
469.9	520.7	23	●											
	520.7	23.4	●											
470	510	20	●											
	520	18	●*											
	520	20	●			●	●							
	520	25							●					
	530	25	●						●					
480	530	28							●					
	520	20	●			●								
	530	20	●											
	530	22	●											
	530	25	●											
482.6	540	25	●	●					●					
	540	28							●					
	540	28							●					
482.6	520.7	19	●	●										
490	530	20	●						●					
	540	25	●											
	550	25	●											
495.3	546.1	23.8	●											
500	540	20	●											
	550	20	●											
	550	25	●											
	560	25	●						●					
	560	28							●					
510	550	20	●			●								
	560	25	●	●										
	570	28							●					

d_1 514~550			Seal type											
														
Boundary dimensions, mm			YS			YSN			YSA		YSAN			
d_1	D	b	N	F	K	N	F	K	N	F	N	F		
514	565	25	●											
514.4	565.15	22.2	●											
520	560	20	●											
	570	20	●											
	580	20							●					
	580	25	●								●			
520.7	580	28									●			
	558.8	19.1	●*											
520.7	571.5	22.2	●											
	571.5	22.2	●											
530	570	20	●											
	580	20	●											
	580	22	●											
	590	28									●			
539.8	600	25	●											
	590.55	22	●*											
540	580	20	●											
	580	25	●											
	590	20	●											
	590	25	●											
	600	25	●								●			
546.1	600	28									●			
	610	25	●											
	596.9	20.6	●											
546.1	596.9	22.2	●											
	596.9	22.2	●											
550	590	20	●											
	600	20	●											
	600	25	●	●										
	610	23	●											
	610	25	●											
	610	28									●			
	620	25	●	●										

Remarks

1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.

5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

d₁ 558~(600)

			Seal type									
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d ₁	D	b	N	F	K	N	F	K	N	F	N	F
558	618	25	●									
558.8	596.9	19.1	●※									
	609.6	22.2	●									
	622.3	22.2	●									
560	600	20	●									
	610	20	●			●						
	610	22	●									
	610	23	●									
	620	25	●						●			
	620	28							●			
	620	30							●			
	630	25	●	●								
570	610	20	●									
	620	22	●									
	630	25	●									
579.2	630	25.4	●									
580	620	20	●			●						
	630	20	●									
	630	25	●									
	640	25	●									
	640	28							●			
	640	30							●			
	650	25		●								
584.2	622.3	19	●		●							
	635	25.4	●									
587	637	20	●									
590	630	20	●									
	640	20	●									
	640	25	●									
	650	28							●			
600	640	19	●									

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1

YS 320 360 18 D5

Spacer width: 5 mm

Example 2

YS 320 360 18 2D5

Spacer width: 5 mm

d₁ (600)~647.7

			Seal type									
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d ₁	D	b	N	F	K	N	F	K	N	F	N	F
600	640	20	●									
	650	25							●			
	660	25	●									
	660	28							●			
609.6	660.4	22.2	●									
610	660	25	●									
	670	23	●									
	670	25	●									
	670	28							●			
620	660	20	●						●			
	670	20	●									
	670	25	●									
	680	25	●									
622.3	673.1	22.2	●						●			
	670	20	●									
	670	25	●									
	680	25	●									
630	690	25	●									
	690	30	●									
	700	30							●			
635	673.1	19.1	●									
	685	25	●									
	695	25	●									
640	680	20	●									
	690	25	●									
	700	25	●									
	700	28							●			
647.7	698.5	22.2	●									

- Remarks
- 1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.


3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.
- 5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

d_1 650~723.9

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
650	700	25	●									
	710	25	●		●							
	710	28							●			
	710	30		●								
	720	25	●									
660	710	25	●									
	720	25	●									
660.4	711.2	22.2	●									
670	710	20	●									
	720	20	●									
	720	25	●									
673.1	711.2	19	●									
680	720	20	●									
	730	25	●									
685	745	25	●									
685.8	736.6	20.2	●									
	736.6	22.2	●*									
690	730	20	●									
	750	25	●									
698.5	749.3	22.2	●									
700	750	20	●									
	750	25	●									
	760	25	●									
710	750	20	●									
	760	25	●		●							
	770	25	●	●	●							
711.2	762	22.2	●									
720	770	25	●									
	780	28							●			
	780	30		●								
723.9	774.7	22.2	●*									

Example of seal number with spacer

(Various width spacers are available as like 10 mm.)

Example 1



YS 320 360 18 D5



Spacer width: 5 mm


Example 2

YS 320 360 18 2D5



Spacer width: 5 mm

d_1 730~(810)

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
730	780	25	●									
	790	25	●									
730.3	781.05	22.2	●									
735	795	25	●									
736.6	774.7	19	●		●							
	787.4	22.2	●*									
	812.8	41.3							●			
740	790	25	●									
	800	25	●									
750	800	25	●									
	810	25	●									
	810	28							●			
760	810	25	●									
	813	22				●		●				
	820	25	●									
	830	30					●					
762	825.5	22.4	●									
774.7	825.5	22.2	●									
	850.9	25.4	●									
780	830	25	●		●							
790	835	20				●						
	840	25	●									
	850	25	●*									
793.5	844.55	19	●									
800	850	22	●									
	850	25	●		●							
	860	25	●									
	870	25	●									
810	860	25	●									
	870	25	●									
	870	28							●			


YS type
*d*₁ (810)~(1 000)

YS YSN YSA YSAN

Remarks

- 1) For seals marked ●, JTEKT owns molding dies for production.
- 2) The cross-sectional view indicates a representative oil seal shape.
- 3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).
Example: YS32036018 (320×360×18 mm).
- 4) Seal number marked ●※ have suffix -1.
- 5) Seals with spacer are available. Seal number with spacer is referred on right side page.
- 6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

*d*₁ (810)~(889)

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
<i>d</i> ₁	<i>D</i>	<i>b</i>	N	F	K	N	F	K	N	F	N	F
810	874	22	●									
820	870	25	●									
	880	25	●									
	880	28							●			
	884	25		●								
825.5	876.3	22.2	●									
830	880	25	●									
	900	25	●									
838.2	879.5	19				●						
	889	22.2	●									
840	890	22	●									
	890	25	●		●							
	910	25	●									
849	900	25									●	
850	900	25	●	●								
	910	25	●									
850.9	914.4	22.2	●									
860	910	25	●									
	920	23	●									
	920	25	●									
864	928	22	●									
870	920	25	●			●		●				
876.3	927.1	22.2	●									
880	930	25	●									
	930	30							●			
	940	25	●									
	940	28							●			
882.7	933.45	22.2	●									
889	939.8	20.6	●									
	952.5	22.2	●									
	952.5	25.4	●									

Example of seal number with spacer

(Various width spacers are available as like 10 mm.)

Example 1


YS 320 360 18 D5



Spacer width: 5 mm


Example 2

YS 320 360 18 2D5



Spacer width: 5 mm

*d*₁ (889)~(1 000)

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
<i>d</i> ₁	<i>D</i>	<i>b</i>	N	F	K	N	F	K	N	F	N	F
889	965.2	25.4	●									
890	940	25	●									
	950	25	●									
900	950	25	●				●	●				
	960	25	●									
914.4	977.9	25.4	●									
920	970	20	●									
	970	25	●									
927.1	977.9	22.2	●									
940	990	25	●									
	1 000	23	●									
	1 000	25	●									
950	1 000	23	●									
	1 000	25	●									
	1 000	30							●			
	1 010	25	●									
952.5	990.6	22.2				●						
	1 002.9	22.2	●									
	1 003.3	22.2	●									
960	1 020	25	●									
970	1 020	25	●									
	1 030	25	●※									
971.5	1 035.05	19.05	●									
971.6	1 035.05	25	●									
977.9	1 041.4	25	●※									
990	1 040	25	●※									
990.6	1 041.4	22.2	●									
1 000	1 050	22	●									
	1 050	23	●		●							
	1 050	25	●									
	1 050	30							●			

Remarks

1) For seals marked ●, JTEKT owns molding dies for production.

2) The cross-sectional view indicates a representative oil seal shape.

3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).

Example: YS32036018 (320×360×18 mm).

4) Seal number marked ●※ have suffix -1.

5) Seals with spacer are available. Seal number with spacer is referred on right side page.

6) Rubber code N represents nitrile rubber, F: fluoro rubber, and K: hydrogenated nitrile rubber.

Example of seal number with spacer
(Various width spacers are available as like 10 mm.)

Example 1



YS 320 360 18 D5



Spacer width: 5 mm


Example 2

YS 320 360 18 2D5




Spacer width: 5 mm

d_1 (1 000)~1 500

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
1 000	1 060	25	●									
	1 100	20				●						
1 010	1 060	25			●							
1 016	1 066.8	22.2	●									
1 020	1 070	25	●									
1 030	1 070	25	●									
1 050	1 110	25	●									
1 070	1 120	25	●									
	1 130	25	●									
1 079.5	1 143	22.2	●									
1 080	1 130	25	●※									
1 090	1 140	25	●									
	1 150	25	●									
1 092.2	1 155.7	25.4	●									
1 104.9	1 155.7	22.2	●									
1 105	1 155	15				●						
1 110	1 160	25	●									
1 117.6	1 181.1	22.2	●									
1 130	1 180	25	●									
1 136	1 186	25	●									
1 140	1 200	25	●									
1 200	1 264	25	●									
1 210	1 270	25	●									
1 320	1 380	30							●	●		
1 340	1 390	25	●									
1 360	1 410	25	●									
1 400	1 460	25	●									
1 460	1 510	25	●									
1 480	1 530.8	22.2	●									
1 498.6	1 549.4	22.2	●						●			
1 500	1 550	25	●									

d_1 1 640

			Seal type									
												
Boundary dimensions, mm			YS			YSN			YSA		YSAN	
d_1	D	b	N	F	K	N	F	K	N	F	N	F
1 640	1 690	25	●※									


Assembled seals

d1 41~440

HMSH



Seals with reinforcing inner metal ring



Remarks 1) The cross-sectional view indicates a representative oil seal shape.
2) All seals use nitrile rubber.

d1 41~(195)			
Boundary dimensions, mm			Seal No.
d1	D	b	
41	53	7	HMSH 41 53 7
80	100	10	HMSH 80 100 10
95	120	13	HMSH 95 120 13
115	145	14	HMSH 115 145 14
125	155	14	HMSH 125 155 14
130	150	10	HMSH 130 150 10
	160	14	HMSH 130 160 14
	170	16	HMSH 130 170 16
135	165	14	HMSH 135 165 14
140	170	14	HMSH 140 170 14
150	180	14	HMSH 150 180 14
155	190	14	HMSH 155 190 14
160	190	14	HMSH 160 190 14
	190	16	HMSH 160 190 16
165	195	14	HMSH 165 195 14
	200	15	HMSH 165 200 15
170	200	16	HMSH 170 200 16
	205	16	HMSH 170 205 16
	225	20	HMSH 170 225 20
175	220	15	HMSH 175 220 15
	230	20	HMSH 175 230 20
180	210	14	HMSH 180 210 14
	210	16	HMSH 180 210 16
	215	16	HMSH 180 215 16
	215	18	HMSH 180 215 18
	220	15	HMSH 180 220 15
	220	18	HMSH 180 220 18
	225	18	HMSH 180 225 18
	235	20	HMSH 180 235 20
190	220	12	HMSH 190 220 12
	220	14	HMSH 190 220 14
	220	15	HMSH 190 220 15
	225	14	HMSH 190 225 14
	225	16	HMSH 190 225 16
	225	18	HMSH 190 225 18
	245	20	HMSH 190 245 20
	245	22	HMSH 190 245 22
195	245	25	HMSH 190 245 25
	230	16	HMSH 195 230 16

d1 (195)~(240)			
Boundary dimensions, mm			Seal No.
d1	D	b	
195	250	20	HMSH 195 250 20
198	255	22	HMSH 198 255 22
200	230	15	HMSH 200 230 15
	235	16	HMSH 200 235 16
	240	14	HMSH 200 240 14
	240	20	HMSH 200 240 20
205	230	16	HMSH 205 230 16
	235	15	HMSH 205 235 15
	235	16	HMSH 205 235 16
	260	23	HMSH 205 260 23
210	240	12	HMSH 210 240 12
	240	15	HMSH 210 240 15
	250	16	HMSH 210 250 16
	250	18	HMSH 210 250 18
	265	23	HMSH 210 265 23
212	245	16	HMSH 212 245 16
215	240	12	HMSH 215 240 12
	245	14	HMSH 215 245 14
	245	15	HMSH 215 245 15
	250	16	HMSH 215 250 16
	270	23	HMSH 215 270 23
220	245	14	HMSH 220 245 14
	250	15	HMSH 220 250 15
	255	16	HMSH 220 255 16
	260	15	HMSH 220 260 15
	260	16	HMSH 220 260 16
224	260	18	HMSH 224 260 18
	255	13	HMSH 225 255 13
	280	23	HMSH 225 280 23
230	255	15	HMSH 230 255 15
	255	16	HMSH 230 255 16
	260	15	HMSH 230 260 15
	260	20	HMSH 230 260 20
235	290	23	HMSH 235 290 23
	270	16	HMSH 236 270 16
240	270	15	HMSH 240 270 15
	270	16	HMSH 240 270 16


d1 (240)~(330)			
Boundary dimensions, mm			Seal No.
d1	D	b	
240	273	16	HMSH 240 273 16
	275	18	HMSH 240 275 18
	280	16	HMSH 240 280 16
	280	19	HMSH 240 280 19
	300	25	HMSH 240 300 25
245	275	13	HMSH 245 275 13
	305	25	HMSH 245 305 25
	305	28	HMSH 245 305 28
	280	15	HMSH 250 280 15
250	280	18	HMSH 250 280 18
	285	16	HMSH 250 285 16
	290	16	HMSH 250 290 16
	310	25	HMSH 250 310 25
260	280	16	HMSH 260 280 16
	290	16	HMSH 260 290 16
	300	18	HMSH 260 300 18
	300	20	HMSH 260 300 20
265	300	22	HMSH 260 300 22
	320	25	HMSH 260 320 25
	290	16	HMSH 265 290 16
	305	18	HMSH 265 305 18
270	325	25	HMSH 265 325 25
	300	15	HMSH 270 300 15
	310	18	HMSH 270 310 18
	313	20	HMSH 270 313 20
275	330	25	HMSH 270 330 25
	310	16	HMSH 275 310 16
280	305	12	HMSH 280 305 12
	310	16	HMSH 280 310 16
	320	18	HMSH 280 320 18
	320	20	HMSH 280 320 20
290	320	25	HMSH 290 320 25
298	337	20	HMSH 298 337 20
300	330	15	HMSH 300 330 15
	332	16	HMSH 300 332 16
	335	18	HMSH 300 335 18
	340	16	HMSH 300 340 16
	340	18	HMSH 300 340 18
	340	22	HMSH 300 340 22
	345	22	HMSH 300 345 22
	360	25	HMSH 300 360 25
	372	16	HMSH 300 372 16
	340	15	HMSH 310 340 15
310	340	22	HMSH 310 340 22
	350	18	HMSH 310 350 18
320	360	18	HMSH 320 360 18
	380	25	HMSH 320 380 25
330	360	18	HMSH 330 360 18
	370	18	HMSH 330 370 18
	380	18	HMSH 330 380 18

d1 (330)~440			
Boundary dimensions, mm			Seal No.
d1	D	b	
330	390	25	HMSH 330 390 25
	390	28	HMSH 330 390 28
340	372	16	HMSH 340 372 16
	380	18	HMSH 340 380 18
350	390	18	HMSH 350 390 18
355	390	15	HMSH 355 390 15
370	410	15	HMSH 370 410 15
	410	18	HMSH 370 410 18
380	440	25	HMSH 380 440 25
440	490	16.5	HMSH 440 490 16.5

Assembled seals
*d*₁ 68~340

HMSAH

Seals with reinforcing inner metal ring



Remarks 1) The cross-sectional view indicates a representative oil seal shape.
2) All seals use nitrile rubber.

*d*₁ 68~340


Boundary dimensions, mm			Seal No.
<i>d</i> ₁	<i>D</i>	<i>b</i>	
68	88	10	HMSAH 68 88 10
	90	10	HMSAH 68 90 10
70	90	10	HMSAH 70 90 10
90	118	12	HMSAH 90 118 12
	135	15	HMSAH 90 135 15
140	170	14	HMSAH 140 170 14
160	190	16	HMSAH 160 190 16
164	194	16	HMSAH 164 194 16
180	215	18	HMSAH 180 215 18
190	225	18	HMSAH 190 225 18
200	235	18	HMSAH 200 235 18
205	260	23	HMSAH 205 260 23
210	265	23	HMSAH 210 265 23
220	255	18	HMSAH 220 255 18
240	270	16	HMSAH 240 270 16
	275	18	HMSAH 240 275 18
	300	28	HMSAH 240 300 28
250	285	15	HMSAH 250 285 15
	310	28	HMSAH 250 310 28
260	290	16	HMSAH 260 290 16
	290	18	HMSAH 260 290 18
	300	22	HMSAH 260 300 22
270	330	25	HMSAH 270 330 25
	330	28	HMSAH 270 330 28
280	320	18	HMSAH 280 320 18
	320	22	HMSAH 280 320 22
	340	28	HMSAH 280 340 28
300	340	22	HMSAH 300 340 22
310	340	20	HMSAH 310 340 20
	350	18	HMSAH 310 350 18
340	400	25	HMSAH 340 400 25

Assembled seals
*d*₁ 117~405

HMSH...J



Seals with reinforcing inner metal ring

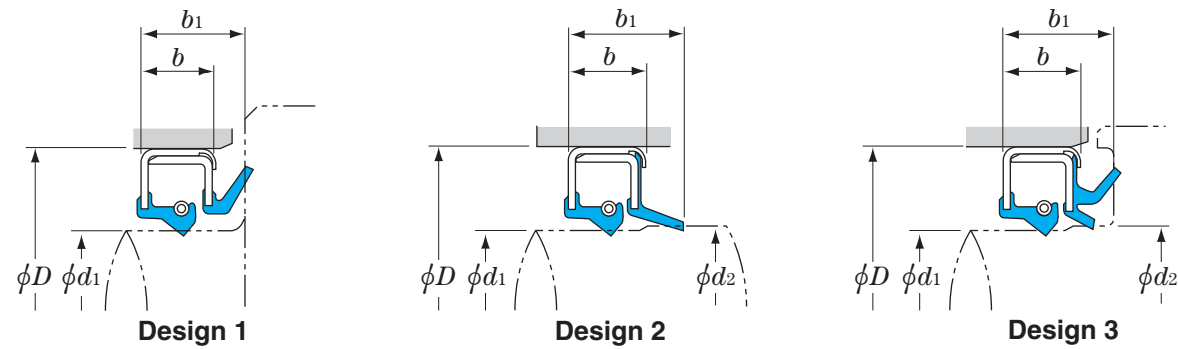


- Remarks
- 1) The cross-sectional view indicates a representative oil seal shape.
 - 2) All seals use nitrile rubber.
 - 3) Consult JTEKT for drain-provided seals.

*d*₁ 117~270

Boundary dimensions, mm					Seal No.	Design
<i>d</i> ₁	<i>d</i> ₂	<i>D</i>	<i>b</i>	<i>b</i> ₁		
117	—	140	10	14	HMSH 117 140 10 – 14 J	1
130	132	150	10	14	HMSH 130 150 10 – 14 J	3
134	—	160	11	17	HMSH 134 160 11 – 17 J	1
137	139	160	11	14	HMSH 137 160 11 – 14 J	3
145	—	165	10	15	HMSH 145 165 10 – 15 J	1
155	158	180	13	17	HMSH 155 180 13 – 17 J	3
159	—	183	12	18	HMSH 159 183 12 – 18 J	1
166	—	190	12	18	HMSH 166 190 12 – 18 J	1
170	—	200	16	25	HMSH 170 200 16 – 25 J	1
174	177	200	14	19	HMSH 174 200 14 – 19 J	3
175	—	200	10	15.5	HMSH 175 200 10 – 15.5 J	1
180	—	220	16	25	HMSH 180 220 16 – 25 J	1
190	—	220	12	18	HMSH 190 220 12 – 18 J	1
	193	220	14	20	HMSH 190 220 14 – 20 J	3
200	203	230	14	20	HMSH 200 230 14 – 20 J	3
	—	235	16	23	HMSH 200 235 16 – 23 J	1
205	—	235	15	22	HMSH 205 235 15 – 22 J	1
210	—	240	12	21	HMSH 210 240 12 – 21 J	1
215	—	240	12	18	HMSH 215 240 12 – 18 J	1
	218	245	14	22	HMSH 215 245 14 – 22 J	3
220	—	245	13	21	HMSH 220 245 13 – 21 J	1
	—	260	16	23	HMSH 220 260 16 – 23 J	1
225	—	255	13	21	HMSH 225 255 13 – 21 J	1
	228	260	14	20	HMSH 225 260 14 – 20 J	3
230	—	260	15	23	HMSH 230 260 15 – 23 J	1
240	240	270	16	22	HMSH 240 270 16 – 22 J	2
	243	275	16	24	HMSH 240 275 16 – 24 J	3
245	—	275	13	21	HMSH 245 275 13 – 21 J	1
250	—	280	16	23	HMSH 250 280 16 – 23 J	1
	—	280	16	25	HMSH 250 280 16 – 25 J	1
254	—	285	11.5	18.4	HMSH 254 285 11.5 – 18.4 J	1
260	263	290	14	20	HMSH 260 290 14 – 20 J	3
270	—	300	16	25	HMSH 270 300 16 – 25 J	1

*d*₁ 280~405

Boundary dimensions, mm					Seal No.	Design
<i>d</i> ₁	<i>d</i> ₂	<i>D</i>	<i>b</i>	<i>b</i> ₁		
280	—	316	18	25	HMSH 280 316 18 – 25 J	1
	384	320	20	28	HMSH 280 320 20 – 28 J	3
300	300	340	20	29	HMSH 300 340 20 – 29 J	3
310	—	350	18	28	HMSH 310 350 18 – 28 J	1
	313	350	20	28	HMSH 310 350 20 – 28 J	3
320	—	360	18	25	HMSH 320 360 18 – 25 J	1
330	—	380	18	25	HMSH 330 380 18 – 25 J	1
340	—	380	18	24	HMSH 340 380 18 – 24 J	1
	—	380	16	21.5	HMSH 340 380 16 – 21.5 J	1
	343	380	18	26	HMSH 340 380 18 – 26 J	3
350	—	390	18	25	HMSH 350 390 18 – 25 J	1
370	—	410	18	25	HMSH 370 410 18 – 25 J	1
375	378	420	20	28	HMSH 375 420 20 – 28 J	3
405	—	435	14.5	19.2	HMSH 405 435 14.5 – 19.2 J	1

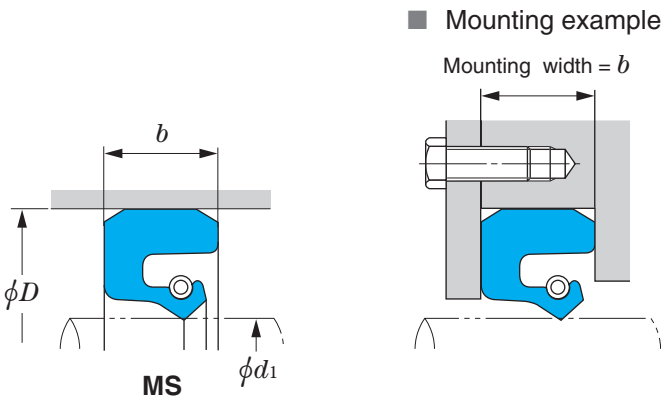

Remarks

1) The cross-sectional view indicates a representative oil seal shape.

2) All seals use nitrile rubber.

3) Mounting width deviation should be as specified in the table below:


Mounting width deviation (Unit : mm)	
Mounting width = b	Deviation
— Up to 6	- 0.1 ~ - 0.2
Over 6 up to 10	- 0.1 ~ - 0.3
Over 10 up to 18	- 0.1 ~ - 0.4
Over 18 up to 30	- 0.1 ~ - 0.5

d_1 10~100			
Boundary dimensions, mm			Seal No.
d_1	D	b	
10	26	6	MS 10 26 6
35	59	12	MS 35 59 12
	60	12	MS 35 60 12
40	65	12	MS 40 65 12
	67	14	MS 40 67 14
45	72	14	MS 45 72 14
50	72	12	MS 50 72 12
	77	14	MS 50 77 14
	80	14	MS 50 80 14
55	78	12	MS 55 78 12
	82	14	MS 55 82 14
	85	14	MS 55 85 14
60	82	12	MS 60 82 12
	84	13	MS 60 84 13
65	92	14	MS 65 92 14
	95	14	MS 65 95 14
	95	15	MS 65 95 15
	95	16	MS 65 95 16
70	100	16	MS 70 100 16
75	100	13	MS 75 100 13
	100	16	MS 75 100 16
	105	16	MS 75 105 16
80	105	13	MS 80 105 13
	110	16	MS 80 110 16
85	110	13	MS 85 110 13
	115	16	MS 85 115 16
90	115	13	MS 90 115 13
	120	16	MS 90 120 16
95	120	10	MS 95 120 10
	125	16	MS 95 125 16
100	120	13	MS 100 120 13
	130	16	MS 100 130 16
	130	18	MS 100 130 18
	133	18	MS 100 133 18
	135	15	MS 100 135 15

d_1 105~160			
Boundary dimensions, mm			Seal No.
d_1	D	b	
105	140	13	MS 105 140 13
	140	18	MS 105 140 18
108	134	16	MS 108 134 16
110	135	8	MS 110 135 8
	140	12	MS 110 140 12
	140	14	MS 110 140 14
	143	18	MS 110 143 18
115	145	18	MS 110 145 18
	145	18	MS 115 145 18
	148	18	MS 115 148 18
120	150	14	MS 115 150 18
	150	15	MS 120 150 14
	150	15	MS 120 150 15
125	150	18	MS 120 150 18
	155	18	MS 120 155 18
	155	14	MS 125 155 14
130	158	18	MS 125 158 18
	160	18	MS 125 160 18
135	160	14	MS 130 160 14
	163	18	MS 130 163 18
140	168	18	MS 135 168 18
	170	18	MS 135 170 18
145	170	14	MS 140 170 14
	173	18	MS 140 173 18
	175	18	MS 140 175 18
150	175	14	MS 145 175 14
	178	18	MS 145 178 18
	180	18	MS 145 180 18
155	180	14	MS 150 180 14
	185	18	MS 150 185 18
	186	20	MS 150 186 20
160	191	20	MS 155 191 20
	200	20	MS 155 200 20
165	195	18	MS 160 195 18
	196	20	MS 160 196 20

d_1 165~235			
Boundary dimensions, mm			Seal No.
d_1	D	b	
165	201	20	MS 165 201 20
170	203	13	MS 170 203 13
	205	16	MS 170 205 16
	210	20	MS 170 210 20
175	211	20	MS 175 211 20
180	215	16	MS 180 215 16
	216	20	MS 180 216 20
	220	20	MS 180 220 20
185	221	20	MS 185 221 20
188	230	20	MS 188 230 20
190	220	12	MS 190 220 12
	226	20	MS 190 226 20
	230	20	MS 190 230 20
195	230	19	MS 195 230 19
	231	20	MS 195 231 20
200	230	16	MS 200 230 16
	239	22	MS 200 239 22
	240	20	MS 200 240 20
205	250	20	MS 205 250 20
208	248	16	MS 208 248 16
	250	20	MS 208 250 20
215	254	22	MS 215 254 22
220	260	20	MS 220 260 20
	260	22	MS 220 260 22
224	260	16	MS 224 260 16
225	260	18	MS 225 260 18
	265	20	MS 225 265 20
230	260	20	MS 230 260 20
	261	10	MS 230 261 10
	269	22	MS 230 269 22
	270	20	MS 230 270 20
	285	23	MS 230 285 23
231	270	20	MS 231 270 20
235	275	20	MS 235 275 20
	275	22	MS 235 275 22

d_1 238~340			
Boundary dimensions, mm			Seal No.
d_1	D	b	
238	275	20	MS 238 275 20
240	275	16	MS 240 275 16
250	290	20	MS 250 290 20
	295	24	MS 250 295 24
255	300	24	MS 255 300 24
260	305	22	MS 260 305 22
	315	24	MS 260 315 24
265	310	22	MS 265 310 22
270	320	24	MS 270 320 24
275	320	24	MS 275 320 24
280	315	20	MS 280 315 20
	325	22	MS 280 325 22
	325	24	MS 280 325 24
	340	25	MS 280 340 25
290	335	24	MS 290 335 24
	350	25	MS 290 350 25
300	340	20	MS 300 340 20
	344	20	MS 300 344 20
	345	22	MS 300 345 22
	350	25	MS 300 350 25
310	350	20	MS 310 350 20
	355	24	MS 310 355 24
	360	25	MS 310 360 25
315	360	20	MS 315 360 20
	360	25	MS 315 360 25
320	370	20	MS 320 370 20
	370	25	MS 320 370 25
	380	25	MS 320 380 25
	380	27	MS 320 380 27
325	375	25	MS 325 375 25
330	380	24	MS 330 380 24
	380	25	MS 330 380 25
340	384	20	MS 340 384 20
	390	25	MS 340 390 25
	400	25	MS 340 400 25

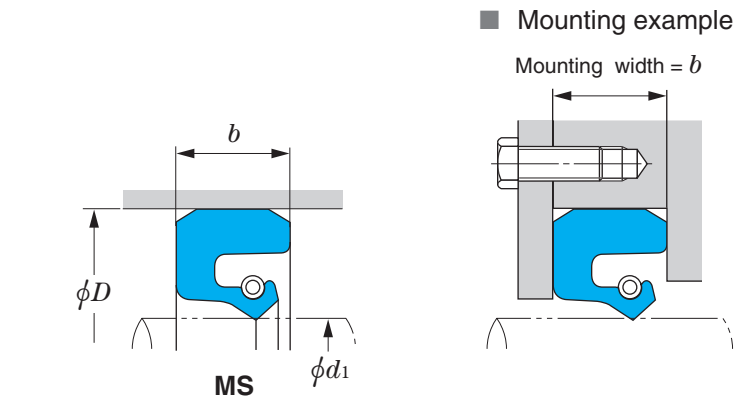

Remarks

1) The cross-sectional view indicates a representative oil seal shape.

2) All seals use nitrile rubber.

3) Mounting width deviation should be as specified in the table below:

Mounting width deviation		(Unit : mm)
Mounting width = b		Deviation
—	Up to 6	- 0.1 ~ - 0.2
Over 6	up to 10	- 0.1 ~ - 0.3
Over 10	up to 18	- 0.1 ~ - 0.4
Over 18	up to 30	- 0.1 ~ - 0.5

d_1 350~480			
Boundary dimensions, mm			Seal No.
d_1	D	b	
350	390	25	MS 350 390 25
	400	20	MS 350 400 20
	400	21	MS 350 400 21
	400	25	MS 350 400 25
355	405	25	MS 355 405 25
360	404	20	MS 360 404 20
	405	25	MS 360 405 25
370	420	24	MS 370 420 24
	420	25	MS 370 420 25
	430	25	MS 370 430 25
380	420	20	MS 380 420 20
	428	20	MS 380 428 20
	430	25	MS 380 430 25
	440	25	MS 380 440 25
384	428	20	MS 384 428 20
390	435	25	MS 390 435 25
	450	25	MS 390 450 25
400	450	25	MS 400 450 25
410	460	25	MS 410 460 25
	470	25	MS 410 470 25
420	470	25	MS 420 470 25
	470	30	MS 420 470 30
	480	25	MS 420 480 25
430	480	25	MS 430 480 25
432	476	20	MS 432 476 20
440	490	25	MS 440 490 25
450	500	25	MS 450 500 25
457	508	21	MS 457 508 21
460	510	25	MS 460 510 25
	515	28	MS 460 515 28
	520	25	MS 460 520 25
465	515	25	MS 465 515 25
475	525	25	MS 475 525 25
480	530	30	MS 480 530 30
	540	25	MS 480 540 25


d_1 490~610			
Boundary dimensions, mm			Seal No.
d_1	D	b	
490	540	25	MS 490 540 25
495	545	25	MS 495 545 25
500	550	20	MS 500 550 20
	550	25	MS 500 550 25
	560	25	MS 500 560 25
	560	30	MS 500 560 30
510	560	25	MS 510 560 25
515	565	25	MS 515 565 25
520	570	24	MS 520 570 24
	570	25	MS 520 570 25
	570	30	MS 520 570 30
	580	25	MS 520 580 25
525	575	22	MS 525 575 22
	575	25	MS 525 575 25
540	590	25	MS 540 590 25
	590	30	MS 540 590 30
550	600	25	MS 550 600 25
	600	30	MS 550 600 30
	610	25	MS 550 610 25
560	610	20	MS 560 610 20
	610	30	MS 560 610 30
	620	25	MS 560 620 25
	620	30	MS 560 620 30
570	620	25	MS 570 620 25
	630	30	MS 570 630 30
580	630	25	MS 580 630 25
	630	30	MS 580 630 30
585	635	22	MS 585 635 22
600	647	25	MS 600 647 25
	650	30	MS 600 650 30
	660	25	MS 600 660 25
	670	30	MS 600 670 30
610	660	25	MS 610 660 25
	660	30	MS 610 660 30
	670	30	MS 610 670 30

d_1 630~920			
Boundary dimensions, mm			Seal No.
d_1	D	b	
630	680	25	MS 630 680 25
	680	30	MS 630 680 30
	700	30	MS 630 700 30
635	705	30	MS 635 705 30
650	700	30	MS 650 700 30
	705	19	MS 650 705 19
	710	30	MS 650 710 30
	720	30	MS 650 720 30
670	720	25	MS 670 720 25
675	725	30	MS 675 725 30
680	730	30	MS 680 730 30
	740	30	MS 680 740 30
690	750	30	MS 690 750 30
695	765	30	MS 695 765 30
700	770	30	MS 700 770 30
710	760	25	MS 710 760 25
	770	30	MS 710 770 30
730	800	30	MS 730 800 30
750	800	30	MS 750 800 30
	820	30	MS 750 820 30
760	820	25	MS 760 820 25
770	817	25	MS 770 817 25
	830	30	MS 770 830 30
780	840	30	MS 780 840 30
790	850	30	MS 790 850 30
800	860	30	MS 800 860 30
	870	30	MS 800 870 30
810	857	25	MS 810 857 25
820	890	30	MS 820 890 30
826	876	30	MS 826 876 30
830	900	30	MS 830 900 30
870	940	30	MS 870 940 30
900	950	25	MS 900 950 25
	960	30	MS 900 960 30
920	990	30	MS 920 990 30

d_1 930~1 760			
Boundary dimensions, mm			Seal No.
d_1	D	b	
930	1 000	30	MS 930 1000 30
950	1 010	30	MS 950 1010 30
960	1 020	25	MS 960 1020 25
1 000	1 050	30	MS 1000 1050 30
1 005	1 052	25	MS 1005 1052 25
1 030	1 080	30	MS 1030 1080 30
1 040	1 087	25	MS 1040 1087 25
	1 110	30	MS 1040 1110 30
1 045	1 095	25	MS 1045 1095 25
1 090	1 137	25	MS 1090 1137 25
1 100	1 150	30	MS 1100 1150 30
	1 157	25	MS 1100 1157 25
	1 170	30	MS 1100 1170 30
1 110	1 157	25	MS 1110 1157 25
1 170	1 217	25	MS 1170 1217 25
1 200	1 250	24	MS 1200 1250 24
	1 250	30	MS 1200 1250 30
	1 270	30	MS 1200 1270 30
1 210	1 267	25	MS 1210 1267 25
1 220	1 267	25	MS 1220 1267 25
1 230	1 290	30	MS 1230 1290 30
1 310	1 357	25	MS 1310 1357 25
1 390	1 450	30	MS 1390 1450 30
1 400	1 456	25	MS 1400 1456 25
	1 460	30	MS 1400 1460 30
1 450	1 497	25	MS 1450 1497 25
1 470	1 517	25	MS 1470 1517 25
1 500	1 550	25	MS 1500 1550 25
1 526	1 582	25	MS 1526 1582 25
1 530	1 590	30	MS 1530 1590 30
1 550	1 606	25	MS 1550 1606 25
1 580	1 640	30	MS 1580 1640 30
1 650	1 700	30	MS 1650 1700 30
1 734	1 790	25	MS 1734 1790 25
1 760	1 820	30	MS 1760 1820 30

Full rubber seals
 d_1 1 880~3 530

MS

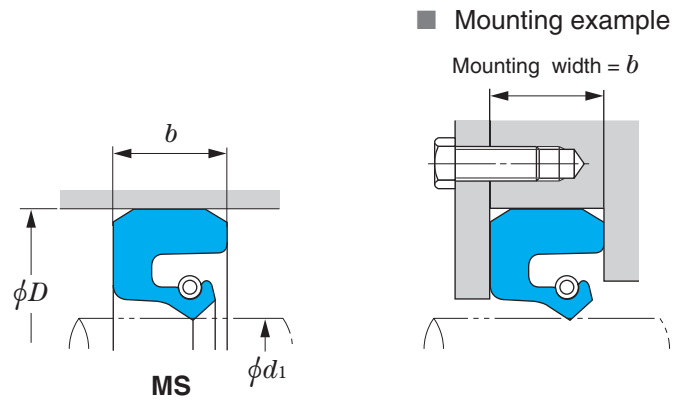

MS
 d_1 1 880~3 530

Boundary dimensions, mm			Seal No.
d_1	D	b	
1 880	1 940	30	MS 1880 1940 30
1 940	1 996	25	MS 1940 1996 25
2 000	2 060	30	MS 2000 2060 30
2 150	2 206	25	MS 2150 2206 25
2 380	2 436	25	MS 2380 2436 25
2 420	2 476	25	MS 2420 2476 25
2 538	2 594	25	MS 2538 2594 25
2 915	2 970	25	MS 2915 2970 25
3 530	3 585	25	MS 3530 3585 25

Remarks

1) The cross-sectional view indicates a representative oil seal shape.

2) All seals use nitrile rubber.

3) Mounting width deviation should be as specified in the table below:

Mounting width deviation (Unit : mm)


Mounting width = b	Deviation
— Up to 6	− 0.1 ~ − 0.2
Over 6 up to 10	− 0.1 ~ − 0.3
Over 10 up to 18	− 0.1 ~ − 0.4
Over 18 up to 30	− 0.1 ~ − 0.5

MORGOIL seals


d₁ 167~1 593

MS..J MS..NJ H..J H..JM H..PJ


MORGOIL seals

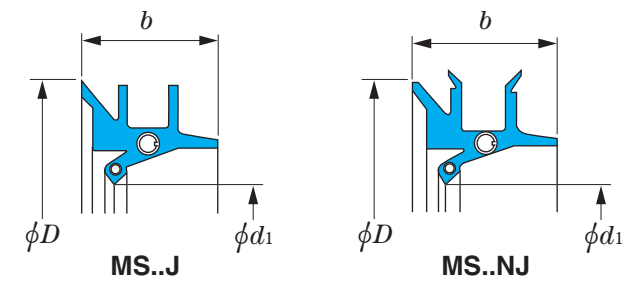

Seal inner rings

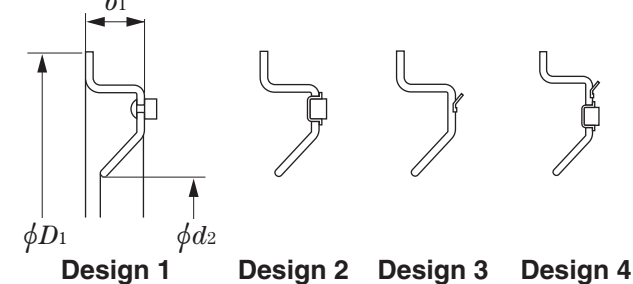

Mounting example

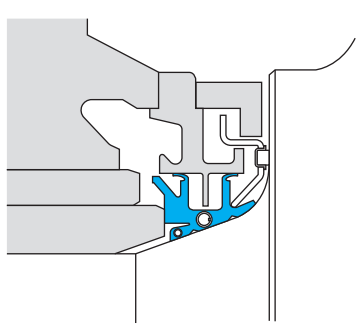

d₁ 167~936

Remarks 1) The cross-sectional view indicates a representative oil seal shape.
2) All seals use nitrile rubber.
Note 1) Special type code B represents "with a steel band" and W represents "with a wire."

MORGOIL seals			Seal inner rings					
Boundary dimensions, mm			Seal No. ¹⁾	Boundary dimensions, mm			Seal inner ring No.	Design
<i>d</i> ₁	<i>D</i>	<i>b</i>		<i>d</i> ₂	<i>D</i> ₁	<i>b</i> ₁		
167	219	41	MS 10 J	194	238	16	H 10 J	1
236	295	49	MS 14 J	270	327	17.5	H 14 J	1
275	346	51	MS 16 J	308	372	21.5	H 16 J	1
323	402	54	MS 18 J	349	421	18	H 18 J	1
369	459	60	MS 21 J	406	490	19	H 21 J	1
			MS 21 JBW					
423	531	72	MS 24 J	475	567	27	H 24 J	1
677	798	84	MS 38 J	737	883	32	H 38 J	1
			MS 38 JB					
			MS 38 NJBW					
713	834	84	MS 40 J	772	940	36.5	H 40 J	1
754	907	95	MS 42 J	822	988	38	H 42 J	1
							H 42 JM	2
786	939	95	MS 44 J	854	1 029	38	H 44 J	1
			MS 44 JB				H 44 JM	2
			MS 44 NJBW				H 44 PJ	3
825	977	95	MS 46 J	892	1 061	38	H 46 J	1
							H 46 JM	2
			MS 46 NJBW	892	1 061	45	H 46 NJM	2
866	1 018	95	MS 48 J	933	1 124	44.5	H 48 J	1
			MS 48 JB				H 48 JM	2
			MS 48 JW					
			MS 48 NJBW					
901	1 054	95	MS 50 J	968	1 162	44.5	H 50 J	1
			MS 50 JB	968	1 162	44.5	H 50 J	1
							H 50 JM	2
							H 50 PJ	3
			MS 50 NJ	968	1 150	43	HM 50 NJP	3
			MS 50 NJB, NJBW					
936	1 089	95	MS 52 J	1 003	1 200	48	H 52 JM	2



d₁ 962~1 593

MORGOL seals			Seal inner rings					
Boundary dimensions, mm			Seal No. ¹⁾	Boundary dimensions, mm			Seal inner ring No.	Design
<i>d</i> ₁	<i>D</i>	<i>b</i>		<i>d</i> ₂	<i>D</i> ₁	<i>b</i> ₁		
962	1 109	92	MS 54 NJBW	1 038	1 225	44.5	H 54 NJP	3
972	1 124	95	MS 54 J	1 038	1 238	44.5	H 54 J	2
			MS 54 JB				H 54 JM	2
			H 54 PJ				3	
				1 052	1 252	72	H 54 SNJP	3
1 029	1 181	95	MS 56 SJ	1 098	1 289	38	H 56 J	1
			MS 56 SJB				H 56 JM	2
			H 56 PJ				3	
			MS 56 NJ	1 098	1 287	44	H 56 NJP	3
			MS 56 NJBW	1 098	1 287	44	H 56 NJM	2
						H 56 NJP	3	
1 099	1 245	92	MS 60 NJBW	1 175	1 340	45	H 60 NJP	3
1 253	1 438	108	MS 68 J					
1 542	1 712	108	MS 80 J	1 630	1 885	55	H 80 JMP	4
1 593	1 782	108	MS 82 J	1 680	1 955	82	H 82 JMP	4

Scale seals

d 195~1 595

WR

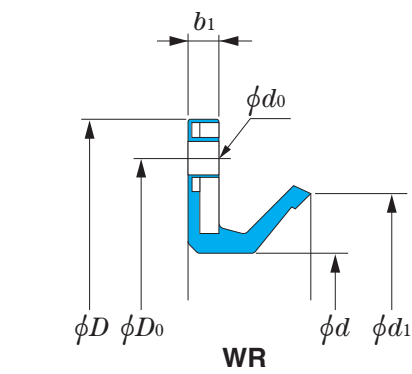



- Remarks
- 1) The cross-sectional view indicates a representative oil seal shape.
 - 2) All seals use nitrile rubber.
 - 3) Consult JTEKT for drain-provided seals.

d 195~740

Boundary dimensions, mm					Scale seal No.	Fixing holes		
<i>d</i>	<i>D</i>	<i>b</i>	<i>b</i> ₁	<i>d</i> ₁		<i>D</i> ₀ mm	<i>d</i> ₀ mm	Hole Q'ty (equally spaced)
195	250	26	5	222	WR 195 250 26	234	9.5	6
200	250	26	5	229	WR 200 250 26	234	9.5	6
210	265	19	4	231	WR 210 265 19	245	9.5	8
240	300	26	5	269	WR 240 300 26	280	9.5	6
255	315	23	5	280	WR 255 315 23	295	9.5	8
275	335	30	5	311	WR 275 335 30	315	9.5	8
280	340	25	5	304	WR 280 340 25	320	9.5	6
290	348	23	5	320	WR 290 348 23	330	9.5	8
	349	35	5	325	WR 290 N1	330	9.5	8
310	455	42.5	11	354	WR 310 455 42.5	400	17.5	Special
318	380	30	8	350	WR 318 380 30	355	9.5	6
325	385	30	8	358	WR 325 385 30 J	360	9.5	6
330	400	35	5	370	WR 330 400 35	380	9.5	Special
335	390	22	4.5	364	WR 335 N1	370	9.5	6
340	410	26	5	369	WR 340 410 26	390	9.5	6
	435	30	5	400	WR 340 435 30 J	415	9	8
350	414	35	5	386	WR 350 414 35	395	10	8
	450	25	5	396	WR 350 450 25	426	11	6
365	425	27.5	5	400	WR 365 425 27.5	405	9.5	12
380	455	35	8	421	WR 380 455 35	430	12	Special
383	450	24	5	409	WR 383 450 24	430	9.5	12
420	480	26	5.5	444	WR 420 N1	462	10	8
424	482	22.5	5	453	WR 424 482 22.5 J	465	9.5	12
430	490	26	8	456	WR 430 490 26	472	10	12
435	489	25.4	7	460	WR 435 489 25.4	470	10	8
440	514	35	5	464	WR 440 514 35	490	12	8
	530	50	7	495	WR 440 530 50	500	14	8
448	510	28.4	6	485	WR 448 510 28.4	490	12	Special
458	540	26	6	485	WR 458 N2	458	11.5	12
490	560	26	6	523	WR 490 N1	535	9.5	8
550	610	22	6	578	WR 550 610 22	590	9.5	8
580	650	51	8	632	WR 580 650 51	626	12	12
645	719	30	4.5	684	WR 645 N1	690	12	12
734	830	21.1	4	770	WR 734 830 21.1	800	12	8
740	840	55	9	786	WR 740 840 55	800	12	12

d 760~1 595

Boundary dimensions, mm					Scale seal No.	Fixing holes		
<i>d</i>	<i>D</i>	<i>b</i>	<i>b</i> ₁	<i>d</i> ₁		<i>D</i> ₀ mm	<i>d</i> ₀ mm	Hole Q'ty (equally spaced)
760	835	33	6	802	WR 760 N2	810	11	8
840	915	35	8	876	WR 840 915 35	890	12	8
870	980	40	8	912	WR 870 980 40	940	14	12
890	1 000	50	8	948	WR 890 1000 50	950	18	12
992	1 064	26	6	1 020	WR 992 1064 26	1 040	12	Special
1 000	1 108	38	8	1 040	WR 1000 1108 38	1 065	14	12
1 105	1 180	40	6	1 145	WR 1105 1180 40	1 156	14	16
1 200	1 270	38	8	1 242	WR 1200 1270 38	1 242	12	16
1 595	1 750	48	7.6	1 663	WR 1595 1750 48 J	1 700	14	20

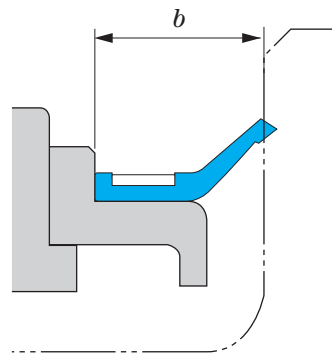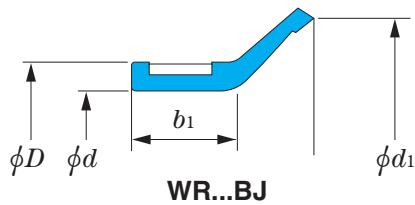Scale seals***d*** 280~1 193.8**WR...BJ**

Remarks

- 1) The cross-sectional view indicates a representative oil seal shape.
- 2) All seals use nitrile rubber.
- 3) Consult JTEKT for drain-provided seals.

d 280~1 193.8

Boundary dimensions, mm					Scale seal No.
<i>d</i>	<i>d</i> ₁	<i>b</i>	<i>b</i> ₁	<i>D</i>	
280	292	27	22.5	288	WR 280 288 27 BJ
326	342.5	38	23	336	WR 326 336 38 BJ
390	400	35	25	400	WR 390 400 35 BJ
395	405	38	25	405	WR 395 405 38 BJ
420	452	35	25	435	WR 420 435 35 BJ
445	461	35	25	461	WR 445 461 35 BJ
	478	35	25	470	WR 445 470 35 BJ
500	516	56.5	35	516	WR 500 516 56.5 BJ – 1
533	546	31.5	22	543	WR 533 543 31.5 BJ – 1
595.3	611.3	29	22	611	WR 595.3 611.3 29 BJ
600	616	45	28	616	WR 600 616 45 BJ
750	792	45	25	766	WR 750 766 45 BJ
760	776	56.5	35	776	WR 760 776 56.5 BJ
800	854	56.5	35	816	WR 800 816 56.5 BJ
824	840	45	25	840	WR 824 840 45 BJ
995	1 044	50	32	1 011	WR 995 1011 50 BJ
1 130	1 146	45	25	1 146	WR 1130 1146 45 BJ
1 193.8	1 231	40	20.5	1 209.8	WR 1193.8 1209.8 40 BJ


Scale seals

 d_1 210~1 203


WR...RJ MH...J H...J

Koyo

■ Scale seal

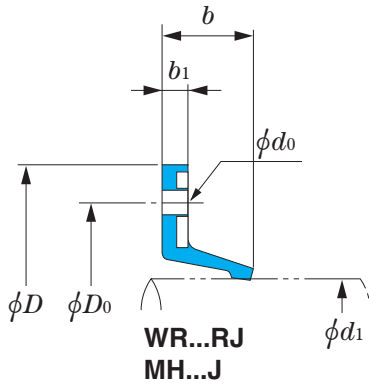

■ Scale cover

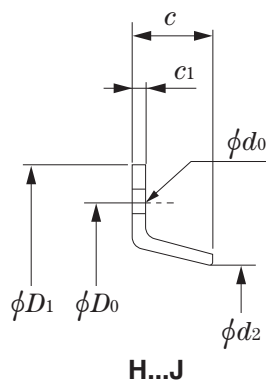

Remarks

- 1) The cross-sectional view indicates a representative oil seal shape.
- 2) All seals use nitrile rubber.
- 3) Consult JTEKT for drain-provided seals.


 d_1 210~1 203

Boundary dimensions, mm				Scale seal No.	Scale cover				Fixing holes			
d_1	D	b	b_1		Boundary dimensions, mm				Scale cover No.	D_0 mm	d_0 mm	Hole Qty (equally spaced)
					d_2	D_1	c	c_1				
210	300	16	4	MH 210 300 4J	218	300	18	2	H 210 300 18 J	275	10	Special
235	340	25	5	WR 235 340 25 RJ	—	—	—	—	—	300	11.5	5
300	380	26	6	MH 300 380 6 J	—	—	—	—	—	350	10	6
395	475	35	6	MH 395 475 6 J	409	475	33	5	H 395 475 33 J	455	10	Special
425	490	16.8	5	MH 425 490 5 J	—	—	—	—	—	470	9.5	8
510	580	25	5	WR 510 580 25 RJ	524	580	30	3.2	H 510 580 30 J	562	9.5	8
550	624	35	8	MH 550 624 8 J	556	624	40	5	H 550 624 40 J	605	10	Special
580	654	34	8	WR 580 654 34 RJ	589	654	40	5	H 580 654 40 J	635	10	12
584	685	25	5	WR 584 685 25 RJ	—	—	—	—	—	635	9	8
623	705	32	8	MH 623 705 8 J	635	705	30	5	H 623 705 30 J	685	12	Special
690	770	35	8	MH 690 770 8 J	700	770	40	5	H 690 770 40 J	745	10	Special
					695	770	55	5	H 690 770 55 J	745	10	Special
696	780	32	8	MH 696 780 8 J	705	780	30	5	H 696 780 30 J	750	14	8
	780	37	8	WR 696 780 32 RJ	—	—	—	—	—	750	10	Special
760	845	35	8	MH 760 845 8 J	—	—	—	—	—	820	10	12
805	885	35	8	MH 805 885 8 J	815	885	37	5	H 805 885 37 J	860	10	12
815	880	35	10	MH 815 880 8 J	828	880	27	5	H 815 880 27 J	865	9	12
820	925	35	8	MH 820 925 8 J	834	925	35	5	H 820 925 35 J	890	14	Special
850	925	30	8	MH 850 925 8 J	857	925	30	5	H 850 925 30 J	900	10	Special
920	995	35	8	WR 920 995 35 RJ	—	—	—	—	—	970	10	12
970	1 070	35	8	WR 970 1070 35 RJ	—	—	—	—	—	1 040	12	12
990	1 090	40	8	WR 990 1090 40 RJ	—	—	—	—	—	1 060	14	12
1 010	1 110	35	6	WR 1010 1110 35 RJ	—	—	—	—	—	1 080	14	12
1 030	1 120	40	8	WR 1030 1120 40 RJ	—	—	—	—	—	1 090	15	12
1 117	1 230	41.5	10	WR 1117 1230 40 RJ	1 137	1 230	45	5	H 1117 1230 45 J	1 200	14	18
1 120	1 220	35	10	MH 1120 1220 10 J	1 132	1 220	33	5	H 1120 1220 33 J	1 190	14	12
1 193	1 290	35	10	MH 1193 1290 10 J	1 206	1 290	33	5	H 1193 1290 33 J	1 260	13	12
1 203	1 300	35	10	MH 1203 1300 10 J	1 215	1 300	33	5	H 1203 1300 33 J	1 270	13	Special

Water seals

d_1 219.2~1 460

XMH XM XMHE

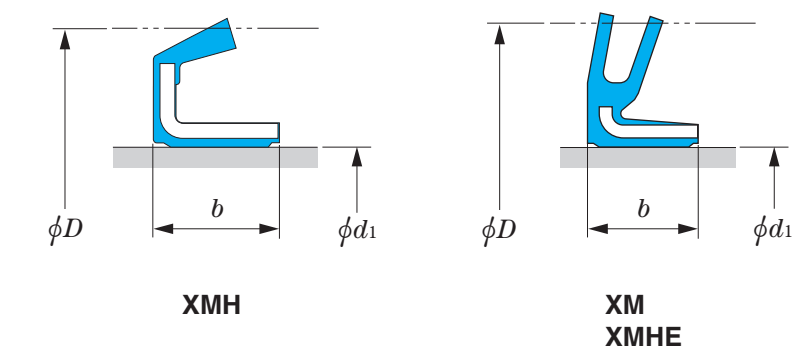



- Remarks
- 1) For seals marked ●, JTEKT owns moulding dies for production.
 - 2) The cross-sectional view indicates a representative oil seal shape.
 - 3) Seal number is constructed by combination of type code and dimensional numbers (bore diameter, outside diameter and width).
Example: XMHE77081029 (770×810×29 mm)
 - 4) All seals use nitrile rubber.

d_1 219.2~940

Boundary dimensions, mm			Seal type		
d_1	D	b	XMH	XM	XMHE
219.2	240	6		●	
230	260	15	●		
265	295	15	●		
274	304	13	●		
296	324	15	●		
345	375	15			●
360	390	20	●		
	400	20			●
365	405	12	●		
400	440	20			●
420	470	20		●	
440	480	20		●	
465	505	25		●	
485	525	25		●	
490	530	20			●
520	560	20			●
560	600	25		●	
580	624	25		●	
610	660	25		●	
620	660	25			●
680	720	25			●
720	770	25			●
740	810	45			●
750	800	25			●
760	820	38			●
834	884	25			●
850	900	30			●
880	930	25			●
905	955	25			●
940	990	25			●

d_1 980~1 460

Boundary dimensions, mm			Seal type		
d_1	D	b	XMH	XM	XMHE
980	1 030	25			●
1 040	1 090	25			●
1 080	1 130	25		●	
1 090	1 150	25		●	
1 110	1 160	25		●	
1 460	1 510	25			●

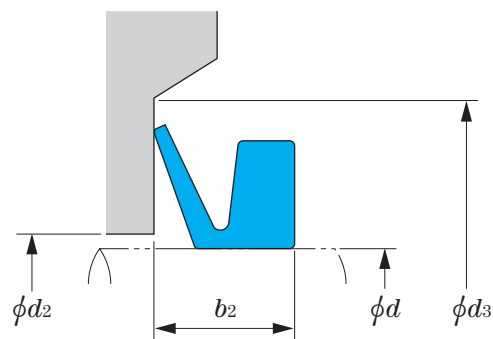V-rings**d 38~875****MV...A****d 38~875**

Remarks 1) The cross-sectional view indicates a representative oil seal shape.
2) All seals use nitrile rubber.

V-ring No.	Shaft diameter	Boundary dimensions, mm				Mounted dimensions, mm		
	d , mm (from~to)	d_1	A	b	b_1	d_2 (max.)	d_3 (min.)	b_2
MV 40 A	38 ~ 43	36	5	9	5.5	$d + 3$	$d + 15$	7.0 ± 1.0
MV 60 A	58 ~ 63	54						
MV 90 A	88 ~ 93	81	6	11	6.8	$d + 4$	$d + 18$	9.0 ± 1.2
MV 100 A	98 ~ 105	90						
MV 120 A	115 ~ 125	108	7	12.8	7.9		$d + 21$	10.5 ± 1.5
MV 140 A	135 ~ 145	126						
MV 150 A	145 ~ 155	135						
MV 170 A	165 ~ 175	153	8	14.5	9	$d + 5$	$d + 24$	12.0 ± 1.8
MV 199 A	195 ~ 210	180						
MV 250 A	235 ~ 265	225	15	25	14.3	$d + 10$	$d + 45$	20.0 ± 4.0
MV 275 A	265 ~ 290	247						
MV 325 A	310 ~ 335	292						
MV 350 A	335 ~ 365	315						
MV 375 A	365 ~ 390	337						
MV 400 A	390 ~ 430	360						
MV 450 A	430 ~ 480	405						
MV 500 A	480 ~ 530	450						
MV 550 A	530 ~ 580	495						
MV 650 A	630 ~ 665	600						
MV 750 A	745 ~ 785	705						
MV 800 A	785 ~ 830	745						
MV 850 A	830 ~ 875	785						

2

O-Rings

2.1	Classification of O-ring and backup ring	94
(1)	O-ring classification and application guide	94
(2)	Backup ring types and material	94
2.2	Numbering systems of O-ring and backup ring	95
(1)	O-ring designation numbers	95
(2)	Backup ring designation numbers	95
2.3	Selection of O-ring	96
(1)	O-ring materials	96
(2)	Selection of O-ring material	98
(3)	Selection of cross section diameter	99
2.4	O-ring technical principles	100
(1)	Sealing mechanism	100
(2)	Backup ring	100
(3)	O-rings for dynamic sealing	100
(4)	O-rings for static sealing of cylindrical surface	100
(5)	O-rings for static sealing of flat surface	101
(6)	O-rings for vacuum flanges	101
(7)	Installation in triangular groove	101
2.5	Fitting groove design for O-ring	102
(1)	Compression amount and compression rate	102
(2)	Extrusion into gap from fitting groove	103
(3)	Fitting groove surface roughness	103
(4)	Chamfer of installation location	103
(5)	Material and surface finishing of fitting groove parts	104
2.6	Handling of O-ring	104
(1)	Storage	104
(2)	Handling	104
2.7	Typical O-ring failures, causes and countermeasures	105
2.8	O-ring dimensional tables (Contents)	107

2.1 Classification of O-ring and backup ring

2.1 Classification of O-ring and backup ring

(1) O-ring classification and application guide

O-rings are used in a various machines as a compact sealing component. O-rings can generally be classified into dynamic applications ("packing") and static applications ("gaskets").

Other classification is according to their properties, such as oil resistance. O-rings are specified in the industrial standards listed in Table 2.1.1.

Table 2.1.1 O-ring classification and application guide

Application	General industrial machines				Automobiles		Aircraft
Standard	JIS B 2401			Old ISO 3601	JASO F 404		AS 568 AS 28775A
Classification	JIS code	Remarks (hardness measured by type A durometer)	Old JIS identification code	Remarks	Material class	Remarks	Remarks
Material	NBR-70-1	Mineral oil resistance (A70)	Class 1-A	For mineral-based fluids Class: JIS NBR-70-1	Class 1-A	General mineral oil resistance	For mineral-based fluids Class: JIS NBR-70-1 NBR-90 FKM-70
	NBR-90	Mineral oil resistance (A90)	Class 1-B		Class 2	Gasoline resistance	
	NBR-70-2	Gasoline resistance (A70)	Class 2		Class 3	Animal oil, vegetable oil, and brake fluid resistance	
	EPDM-70	Animal oil, vegetable oil, and brake fluid resistance (A70)	Class 3		Class 4-C	High-temperature application resistance	
	EPDM-90	Animal oil, vegetable oil, and brake fluid resistance (A90)	—			High-temperature application resistance	
	VMQ-70	High-temperature application resistance (A70)	Class 4-C		Class 4-D	High-temperature application resistance	
	FKM-70	High-temperature application resistance (A70)	Class 4-D		Class 4-E	High-temperature application resistance	
	FKM-90	High-temperature application resistance (A90)	—			High-temperature application resistance	
	HNBR-70	Mineral oil and high-temperature application resistance (A70)	—		Class 5	Coolant resistance	
	HNBR-90	Mineral oil and high-temperature application resistance (A90)	—			Coolant resistance	
	ACM-70	High-temperature application and mineral oil resistance (A70)	—			Coolant resistance	
	SBR-70*	Animal oil and vegetable oil resistance (A70)	Class 3			Coolant resistance	
Application	P: For dynamic use and static sealing V: For vacuum flanges G: For static sealing S: For slim static sealing (not standardized in the JIS)			For general industrial use	For dynamic use and static sealing		For static sealing

* : Not standardized in the JIS

(2) Backup ring types and material

Backup rings are used with O-rings to prevent O-ring protrusion from the groove.

Backup rings are used for dynamic sealing and for static sealing of cylindrical surface.

Table 2.1.2 shows backup ring types and material.

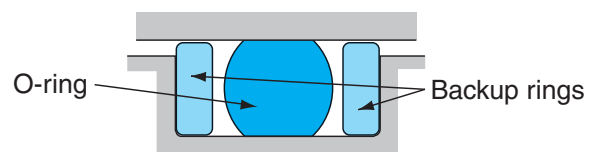


Fig. 2.1.1 O-ring installation with backup rings

Table 2.1.2 Backup ring types and material

Applicable standard	JIS B 2407		
Type	T1: Spiral ring	T2: Bias-cut ring	T3: Endless ring
Shape			
Material	Tetrafluoroethylene resin		
Applications	For dynamic sealing / static sealing of cylindrical surface		

2.3 Selection of O-ring

(1) O-ring materials

Materials conforming to JIS B 2401 or JASO F 404 standards are mainly used. Major rubber materials and their physical properties are listed in Table 2.3.1.

Consult JTEKT for special materials to suit a wide variety of applications.

Table 2.3.1 O-ring rubber materials and their physical properties

Applicable standards		Class													
JIS B 2401		NBR-70-1	NBR-90	NBR-70-2	HNBR-70	HNBR-90		SBR-70 ³⁾	VMQ-70	FKM-70	FKM-90	ACM-70	EPDM-70	—	EPDM-90
JASO F 404		Class 1-A	—	Class 2	—	—		Class 3	Class 4-C	Class 4-D	—	Class 4-E	—	Class 5	—
Rubber materials, Applications Test items		Nitrile rubber (NBR)	Nitrile rubber (NBR)	Nitrile rubber (NBR)	Hydrogenated nitrile rubber (HNBR)	Hydrogenated nitrile rubber (HNBR)		Styrene-butadiene rubber (SBR)	Silicone rubber (VMQ)	Fluoro rubber (FKM)	Fluoro rubber (FKM)	Acrylic rubber (ACM)	Ethylene-propylene rubber (EPDM)	Ethylene-propylene rubber (EPDM)	Ethylene-propylene rubber (EPDM)
		Mineral oil resistance		Gasoline resistance	Mineral oil and high-temperature application resistance			Animal oil and vegetable oil resistance	High-temperature application resistance				Animal oil, vegetable oil, and brake fluid resistance	Coolant resistance	Animal oil, vegetable oil, and brake fluid resistance
Normal properties	Hardness by durometer type A ¹⁾	A70 ± 5	A90 ± 5	A70 ± 5	A70 ± 5	A90 ± 5		A70 ± 5	A70 ± 5	A70 ± 5	A90 ± 5	A70 ± 5	A70 ± 5	A70 ± 5	A90 ± 5
	Tensile strength (MPa), min.	10.0	14.0	10.0	16.0	16.0		9.8	3.5	10.0	10.0	6.0	10.0	9.8	10.0
	Elongation (%), min.	250	100	200	180	100		150	60	170	80	100	150	150	80
	Tensile stress (MPa), min. (at 100 % elongation)	2.5	—	2.5	2.5	—		2.7	—	2.0	—	—	—	2.7	—
Aging tests	Temperature and duration	120 °C, 72h		100 °C, 72h	150 °C, 72h			100 °C, 70h	230 °C, 72h		230 °C, 72h	150 °C, 72h	100 °C, 72h	120 °C, 70h	100 °C, 72h
	Change in hardness, max.	+ 10	+ 10	+ 10	+ 15	+ 15		+ 10	+ 10	+ 5	+ 5	+ 10	+ 10	+ 10	+ 10
	Change in tensile strength (%), max.	— 15	— 25	— 15	— 30	— 30		— 15	— 10	— 10	— 10	— 30	— 15	— 20	— 15
	Change in elongation (%), max.	— 45	— 55	— 40	— 40	— 40		— 45	— 25	— 25	— 25	— 40	— 45	— 40	— 45
Compression set test	Temperature and duration	120 °C, 72h		100 °C, 72h	150 °C, 72h			100 °C, 70h	175 °C, 72h	200 °C, 72h	200 °C, 72h	150 °C, 72h	100 °C, 72h	120 °C, 70h	100 °C, 72h
	Compression set (%), max.	40	40	25	40	40		25	30	40	40	60	25	40	30
Immersion test	Temperature, duration, and testing oil	120 °C, 72h IRM901 ²⁾		23 °C, 72h fuel oil No.1 ²⁾	150 °C, 72h IRM901 ²⁾			100 °C, 70h brake fluid ²⁾	175 °C, 72h IRM901 ²⁾		175 °C, 72h IRM901 ²⁾	150 °C, 72h IRM901 ²⁾	100 °C, 72h brake fluid ²⁾	100 °C, 70h coolant	100 °C, 72h brake fluid ²⁾
	Change in hardness	— 5 ~ + 8	— 5 ~ + 8	— 8 ~ 0	— 5 ~ + 10	— 5 ~ + 10		— 15 ~ 0	— 10 ~ + 5	— 10 ~ + 5	— 10 ~ + 5	— 7 ~ + 10	— 15 ~ 0	— 5 ~ + 5	— 15 ~ 0
	Change in tensile strength (%), max.	— 15	— 20	— 15	— 20	— 20		— 40	— 20	— 20	— 20	— 30	— 40	— 40	— 40
	Change in elongation (%), max.	— 40	— 40	— 25	— 40	— 40		— 40	— 20	— 20	— 20	— 40	— 40	— 40	— 40
	Change in volume (%)	— 8 ~ + 5	— 8 ~ + 5	— 3 ~ + 5	— 10 ~ + 5	— 10 ~ + 5		0 ~ + 12	0 ~ + 10	— 5 ~ + 5	— 5 ~ + 5	— 5 ~ + 5	0 ~ + 12	— 5 ~ + 5	0 ~ + 12
	Temperature, duration, and testing oil	120 °C, 72h IRM903 ²⁾		23 °C, 72h fuel oil No.2 ²⁾	150 °C, 72h IRM903 ²⁾			—	—	175 °C, 72h IRM903 ²⁾	175 °C, 72h IRM903 ²⁾	150 °C, 72h IRM903 ²⁾	—	—	—
	Change in hardness	— 15 ~ 0	— 10 ~ + 5	— 20 ~ 0	— 15 ~ + 5	— 15 ~ + 5	— 10 ~ + 5			— 10 ~ + 5	— 20 ~ 0				
	Change in tensile strength (%), max.	— 25	— 35	— 45	— 30	— 35	— 20			— 20	— 40				
	Change in elongation (%), max.	— 35	— 35	— 45	— 40	— 40	— 20			— 20	— 40				
	Change in volume (%)	0 ~ + 20	0 ~ + 20	0 ~ + 30	0 ~ + 30	0 ~ + 25	— 5 ~ + 5			— 5 ~ + 5	0 ~ + 30				
Low-temperature brittleness test	Brittleness limit temperature (°C), max.	— 13	—	— 10	—	—		— 40	— 50	— 15	—	— 1	—	— 40	—
Low-temperature elastic recovery test	TR10 value (°C), max.	— 15	— 15	— 10	— 15	— 15		—	— 30	— 10	— 10	— 10	— 30	—	— 25
Corrosion test	Temperature and duration	70 ± 1 °C, 24h													
	Appearance	The rubber shall not corrode the metal with which it is in contact nor shall the rubber become sticky. However, changes in metal surface color shall not be judged as corrosion.													

Notes 1) Instantaneous values have been used.

2) For details, see the appendix of JIS B 2401-1.

3) Not standardized in the JIS.

(2) Selection of O-ring material

O-rings have contact with substances to be sealed. Therefore, material should be chemically stable to such substances.

Table 2.3.2 below lists the substances with which each rubber material can remain stable. Consult JTEKT for further details.

- ◎ : Resistant to the substance
 ○ : Resistant to the substance except under extreme conditions
 △ : Not resistant to the substance except under specific favorable conditions
 × : Not resistant to the substance

Table 2.3.2 O-ring rubber materials and their stability to fluids

Applicable standard		Class												
JIS B 2401		NBR-70-1	NBR-90	NBR-70-2	HNBR-70	HNBR-90	SBR-70*	VMQ-70	FKM-70		FKM-90	ACM-70	EPDM-70	EPDM-90
JASO F 404		Class 1-A	—	Class 2	—	—	Class 3	Class 4-C	Class 4-D		—	Class 4-E	—	Class 5
Rubber materials		Nitrile rubber (NBR)	Nitrile rubber (NBR)	Nitrile rubber (NBR)	Hydrogenated nitrile rubber (HNBR)	Hydrogenated nitrile rubber (HNBR)	Styrene-butadiene rubber (SBR)	Silicone rubber (VMQ)	Fluoro rubber (FKM)		Fluoro rubber (FKM)	Acrylic rubber (ACM)	Ethylene-propylene rubber (EPDM)	Ethylene-propylene rubber (EPDM)
Operating temperature range (°C) (Guidance)		− 30 ~ 100	− 25 ~ 100	− 25 ~ 80	− 30 ~ 140	− 25 ~ 140	− 50 ~ 80	− 50 ~ 200	− 15 ~ 200		− 10 ~ 200	− 15 ~ 130	− 45 ~ 130	− 40 ~ 130
Weatherability	Ozone resistance	△	△	△	○	○	△	◎	◎		◎	◎	◎	◎
	Flame resistance	×	×	×	×	×	×	○	◎		◎	×	×	×
	Radiation resistance	△	△	△	△	△	○	△	△		△	×	○	○
	Coal gas	○	◎	◎	○	○	△	△	◎		◎	○	△	△
	Liquefied petroleum gas	○	◎	◎	○	○	×	×	◎		◎	△	×	×
Resistance to lubrication oils	Gear oil	◎	○	○	◎	◎	×	×	◎		◎	◎	×	×
	Engine oil	◎	○	○	◎	◎	×	△	◎		◎	◎	×	×
	Machine oil	◎	◎	◎	◎	◎	×	○	◎		◎	◎	×	×
	Spindle oil	○	◎	◎	◎	◎	×	△	◎		◎	○	×	×
	Lithium grease	◎	◎	◎	◎	◎	×	◎	◎		◎	◎	×	×
	Silicone grease	◎	◎	◎	◎	◎	○	×	◎		◎	◎	◎	◎
	Cup grease	◎	◎	◎	◎	◎	×	△	◎		◎	○	×	×
	Refrigeration oil (mineral oil)	○	◎	◎	○	○	×	△	◎		◎	○	×	×
Resistance to hydraulic fluids	Turbine oil	◎	◎	◎	◎	◎	×	○	◎		◎	◎	×	×
	Torque-converter oil	△	◎	◎	△	△	×	△	◎		◎	◎	×	×
	Brake fluid	△	△	△	△	△	◎	○	△		△	×	◎	◎
	Silicone oil	◎	◎	◎	◎	◎	○	×	◎		◎	◎	◎	◎
	Phosphoric ester	×	×	×	×	×	×	○	△		△	×	◎	◎
	Water + glycol	○	○	○	○	○	○	△	○		○	×	◎	◎
	Oil + water emulsion	◎	◎	◎	◎	◎	△	△	○		○	×	△	△
	Gasoline	△	○	○	○	○	×	×	◎		◎	△	×	×
Resistance to fuel oils and water	Light oil and kerosene	○	◎	◎	◎	◎	×	△	◎		◎	△	×	×
	Heavy oil	△	○	○	△	△	×	×	◎		◎	×	×	×
	Cold water and warm water	○	○	○	○	○	○	○	○		○	×	◎	◎
	Steam and hot water	○	○	○	○	○	○	△	△		△	×	◎	◎
	Water including antifreeze fluid	○	○	○	○	○	△	△	○		○	×	◎	◎
	Water-based cutting oil	○	○	○	○	○	△	△	○		○	×	△	△
	Trichloroethylene	×	×	×	×	×	×	×	△		△	×	×	×
	Alcohol	○	○	○	○	○	◎	○	○		○	×	◎	◎
Chemical resistance	Benzene	×	×	×	×	×	×	×	△		△	×	×	×
	Ethylene glycol	◎	◎	◎	◎	◎	◎	◎	◎		◎	△	◎	◎
	Acetone	×	×	×	×	×	△	△	×		×	×	○	○
	Hydrochloric acid 20 %	△	△	△	△	△	○	△	◎		◎	△	◎	◎
	Sulfuric-acid 30 %	○	○	○	○	○	○	○	◎		◎	△	◎	◎
	Nitric-acid 10 %	×	×	×	×	×	×	×	◎		◎	×	○	○
	Caustic soda 30 %	○	○	○	○	○	◎	△	×		×	×	◎	◎
	Features	• The most common material • High resistance to oil, abrasion and heat • Hardness: A70	• Harder and higher pressure resistance than NBR-70-1 (Class 1-A rubber) • Same properties as NBR-70-1 (Class 1-A rubber) in other respects • Hardness: A90	• High resistance to fuel oils, such as gasoline, light oil and kerosene	• Superior to the NBR-70-1 in terms of ozone resistance, oil resistance, and heat resistance • Hardness: A70	• Superior to the HNBR-70 in terms of hardness and resistance to pressure • Same properties as the HNBR-70 in other respects • Hardness: A90	• Highest resistance to animal oil and vegetable oil, such as brake fluid	• High resistance to high and low temperature • Excellent self-restoration after compression, under a wide temperature range	• Highest resistance to oils, chemicals, and heat • Useful over a wide temperature range • Hardness: A70		• Harder and higher pressure resistance than FKM-70 (Class 4-D rubber) • Same properties as FKM-70 (Class 4-D rubber) in other respects • Hardness: A90	• Superior to nitrile rubber in terms of heat resistance and oil resistance • Especially resistant to high-temperature oil	• Superior in ozone resistance, heat resistance and electrical insulation resistance • Hardness: A70	• Harder and higher pressure resistance than EPDM-70 (Class 5 rubber) • Same properties as EPDM-70 (Class 5 rubber) in other respects • Hardness: A90

* Not standardized in the JIS.

(3) Selection of cross section diameter

When sealing fluid with O-ring, design the O-ring so that the depth of groove for fitting it is smaller than the thickness of the O-ring to compress (squeeze) it (provide compression amount). Determine this compression carefully, because O-rings may become permanently deformed if squeezed excessively, thus deteriorating sealing performance.

Generally, the compression rate of an O-ring should be between 8 % and 30 % in ring cross section diameter (the lower limit of 8 % for sufficient sealing performance and the upper limit of 30 % for limited compression set.).

Fig. 2.3.1 shows the relation between O-ring cross section diameter and compression set.

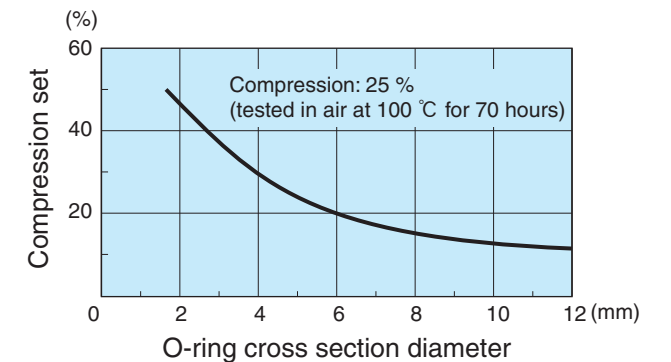


Fig. 2.3.1 Relation between O-ring cross section diameter and compression set

Larger cross section diameter offers more stable sealing performance. As shown in Fig. 2.3.1, when the O-ring compression rate is constant (25 % in the figure), the larger cross section diameter shows the smaller the compression set. Larger cross section diameter is advantageous in that it can accommodate errors in installation dimensions as well.

In dynamic-sealing applications, larger cross section diameter is less likely to twist during service or during installation. The largest cross section diameter possible should be selected providing it can fit in the available space.

2.4 O-ring technical principles

(1) Sealing mechanism

Fig. 2.4.1 shows how O-ring can be deformed under pressure.

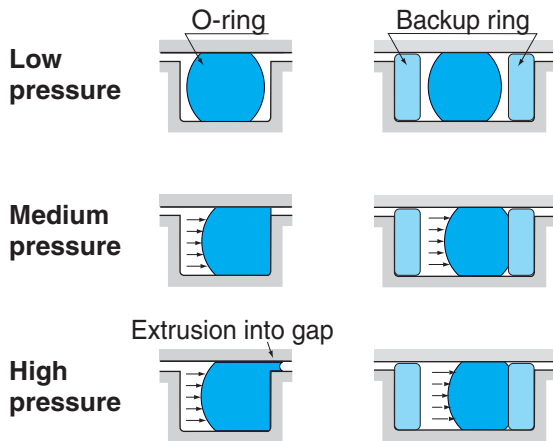


Fig. 2.4.1 O-ring deformation under pressure

O-ring installed in a groove with compression (compression rate) of 8 % to 30 % provides a self-seal by its elasticity when the pressure is low.

When operation pressure is higher, the O-ring is pressed against one side of the groove, providing better sealing. However, under extremely high pressure, the O-ring partially is pressed out from groove into the gap and may be damaged, and deteriorated sealing performance.

For such high-pressure applications, one or two backup rings should be applied to prevent extrusion into gap.

(2) Backup ring

Backup rings are used for dynamic sealing and for static sealing of cylindrical surface.

Two backup rings should be installed on both sides of O-ring when high pressure is put on the O-ring in two directions. One backup ring is installed on low pressure side of O-ring when high pressure is applied in one direction.

Even when extrusion into gap does not occur under low pressure, backup rings are recommended because they can extend O-ring service life by preventing O-ring tearing or damage, which are the most common causes of O-ring failures.

One each backup ring is installed on both sides of O-ring normally (total is two backup rings). However, if space does not allow this, one backup ring should be installed on the lower-pressure side.

The O-ring extrusion varies depending on applied pressure, O-ring hardness and gap amount on the cylindrical surface. Refer to Fig. 2.5.2, "O-ring extrusion limit values," when using backup rings.

Backup rings of endless design (T3) are the most advantageous in the prevention of extrusion into the gap. However, those of spiral design (T1) and bias-cut design (T2) can be more easily installed.

Backup rings of spiral design are most commonly used.

Use backup rings of spiral design with a pressure between 10 MPa and 20 MPa. If the operating temperature exceeds 100°C, use backup rings of spiral design with a pressure of less than 10 MPa.

Backup rings of bias-cut design excel at protecting O-rings at pressures ranging from 15 MPa to 20 MPa and above.

Backup rings of endless design are suited to use with pressures exceeding 25 MPa and temperatures exceeding 135°C.

All Koyo backup rings are made from tetrafluoroethylene (PTFE) resin, which is chemically stable to all media under a wide range of temperatures and is resistant to corrosion.


(3) O-rings for dynamic sealing (Reciprocal movement)

When fitting groove is provided on the piston, use two O-rings to ensure improved service life and sealing performance (Fig. 2.4.2). Pack grease between the two O-rings in a non-lubrication application. Recommended grease is lithium soap base with NLGI No. 2.


When fitting groove is provided on the cylinder, use a dust seal as well and pack grease between the O-ring and dust seal.

Groove on piston

Pack grease for non-lubrication applications

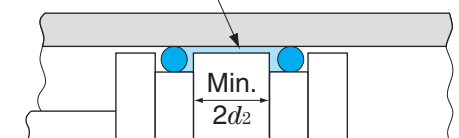

Groove on cylinder

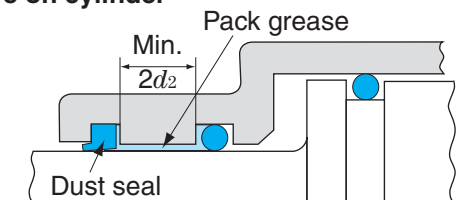

d_2 : O-ring cross section diameter

Fig. 2.4.2 Typical installation of O-ring for dynamic sealing

For the installation of O-rings on cast cylinders or for low-friction dynamic-sealing applications, consult JTEKT.

(4) O-rings for static sealing of cylindrical surface

When O-ring is used under low pressure with the compression rate close to the minimal of 8 %, the fitting groove accuracy affects sealing performance so much, so that the groove accuracy should be controlled at the same level as the fitting groove of dynamic sealing.

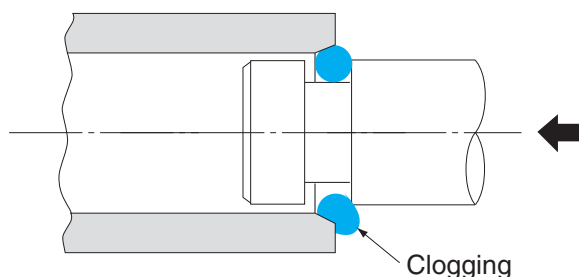


Fig. 2.4.3 O-ring slack and clogging

Even when an O-ring is selected in accordance with the dimensional table values and groove dimensions, the O-ring may become slack due to dimensional deviation and installation method, which may be caused by the reason why the O-ring is unduly caught between the groove and housing (Fig. 2.4.3).

Especially large size O-rings must be installed with care to avoid ring slack.

To prevent ring slack for the ring size of 150 mm or more, a slightly smaller size O-ring may be used rather than one that exactly fits the groove dimensions after determining the O-ring compression amount carefully.

Consult JTEKT for this method.

(5) O-rings for static sealing of flat surface

Determine the O-ring compression amount to be slightly larger than in other applications.

If the O-ring is exposed to internal pressure, the O-ring outside diameter should be determined, according to groove diameter ϕd_7 . When the O-ring is exposed to external pressure, O-ring bore diameter should be determined according to groove diameter ϕd_8 (see Fig. 2.4.4 (a) and (b)).

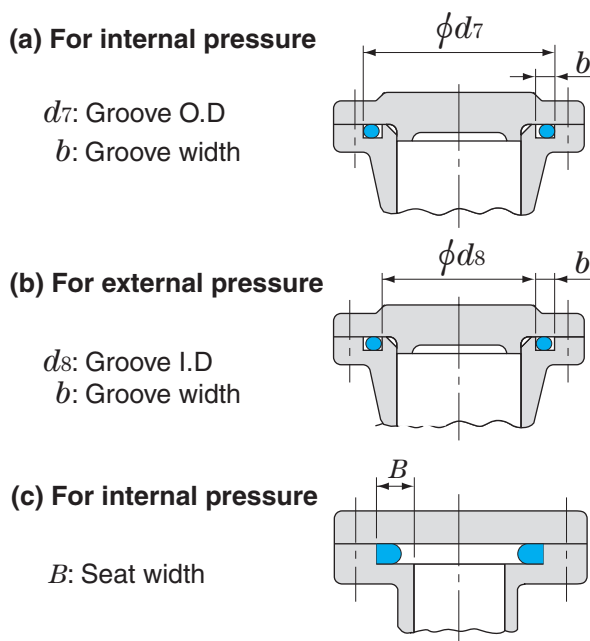



Fig. 2.4.4 Fitting groove for static sealing of flat surface

If the O-ring is exposed to pressure in one direction, the groove side face on the high-pressure side can be eliminated for easy machining (Fig. 2.4.4 (c)).

In this case, dimension B should be greater than the minimum of the groove width b (Fig. 2.4.4(a)) used in flat surface static-sealing application.

In the case of internal-pressure applications and O-ring size is small (30 mm or less), groove outside diameter ϕd_7 should be 0.2 to 0.3 mm larger to ensure correct O-ring installation.

In the case of thin O-ring (cross section diameter 3 mm or less) of large size (150 mm or more), it may be installed on the groove incorrectly and partially protruding from the groove, which results in cutting off of O-ring. Such a situation must be avoided. Use thicker O-ring to prevent such a protrusion (Fig. 2.4.5).

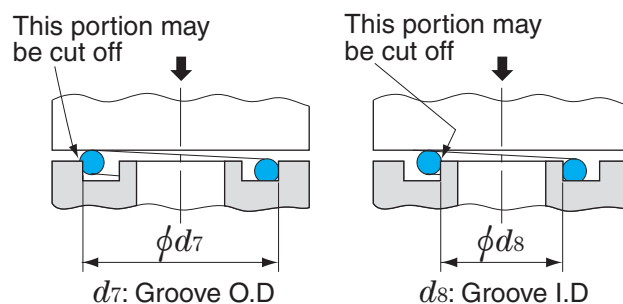

For internal pressure For external pressure

Fig. 2.4.5 O-ring protrusion

(6) O-rings for vacuum flanges

In vacuum applications, O-rings are used to seal in gases. Therefore, fitting groove surfaces should be carefully machined and finished.

To select a suitable rubber material to meet vacuum grade, consult JTEKT.

(7) Installation in triangular groove

When O-ring is installed on the interior angle on a shaft or flange, the A dimension of the triangular groove should be 1.3 to 1.4 times of the O-ring cross section diameter (Fig. 2.4.6).

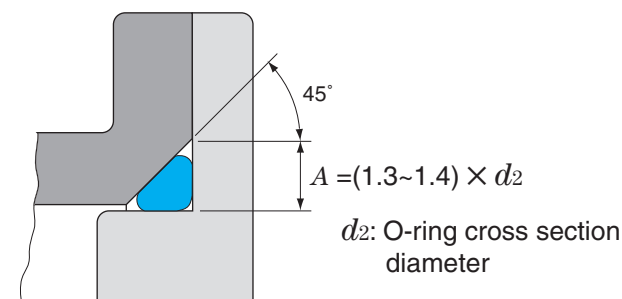


Fig. 2.4.6 Triangular-groove dimensions

2.5 Fitting groove design for O-ring


(1) Compression amount and compression rate

Table 2.5.1 lists the JIS-standard of O-ring Compression amount and compression rate.

See dimension table for each groove dimensions corresponding to O-ring number.

Compression amounts of standards other than JIS are shown in respective dimensional tables.

Fig.2.5.1 shows the details of relation between the shape of groove and the compression amount and compression rate.

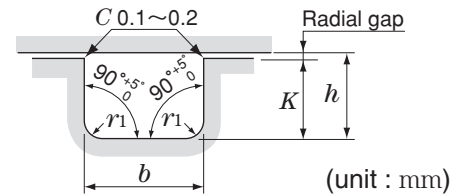

1) Groove depth K

Determine dimension h to obtain O-ring compression rate between 8 % and 30%.

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.

$$\text{Compression amount} = d_2 - h$$

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%)$$

d_2 : O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2 / 2)^2}{b \times h} \times 100 (\%)$$

Fig. 2.5.1 Relation between shape of groove and compression amount (rate)

Table 2.5.1 O-ring compression amount and compression rate

O-ring number	O-ring dimensions, mm		Compression amount and compression rate							
			For dynamic sealing /static sealing of cylindrical surface				For static sealing of flat surface			
			mm		%		mm		%	
	Cross section diameter d_2	Bore diameter d_1	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
P3 ~ P10	1.9 ±0.08	2.8 ~ 9.8	0.48	0.27	24.2	14.8	0.63	0.37	31.8	20.3
P10A ~ P18	2.4 ±0.09	9.8 ~ 17.8	0.49	0.25	19.7	10.8	0.74	0.46	29.7	19.9
P20 ~ P22		19.8 ~ 21.8								
P22A ~ P40	3.5 ±0.1	21.7 ~ 39.7	0.60	0.32	16.7	9.4	0.95	0.65	26.4	19.1
P41 ~ P50		40.7 ~ 49.7								
P48A ~ P70	5.7 ±0.13	47.6 ~ 69.6	0.83	0.47	14.2	8.4	1.28	0.92	22.0	16.5
P71 ~ P125		70.6 ~ 124.6								
P130 ~ P150		129.6 ~ 149.6								
P150A ~ P180	8.4 ±0.15	149.5 ~ 179.5	1.05	0.65	12.3	7.9	1.70	1.30	19.9	15.8
P185 ~ P300		184.5 ~ 299.5								
P315 ~ P400		314.5 ~ 399.5								
G25 ~ G40	3.1 ±0.1	24.4 ~ 39.4	0.70	0.40	21.85	13.3	0.85	0.55	26.6	18.3
G45 ~ G70		44.4 ~ 69.4								
G75 ~ G125		74.4 ~ 124.4								
G130 ~ G145	5.7 ±0.13	129.4 ~ 144.4	0.83	0.47	14.2	8.4	1.28	0.92	22.0	16.5
G150 ~ G180		149.3 ~ 179.3								
G185 ~ G300		184.3 ~ 299.3								


Tolerances of O-ring bore diameter d_1 are given in the dimensional table of the O-rings.

(2) Extrusion into gap from fitting groove

The O-ring and backup ring extrusion into the gap from the fitting groove on cylindrical surfaces is mainly related to the gap amount of the cylindrical surface.

Pressure of fluid to be sealed or O-ring hardness also influence.

Fig. 2.5.2 shows the relation between these factors.

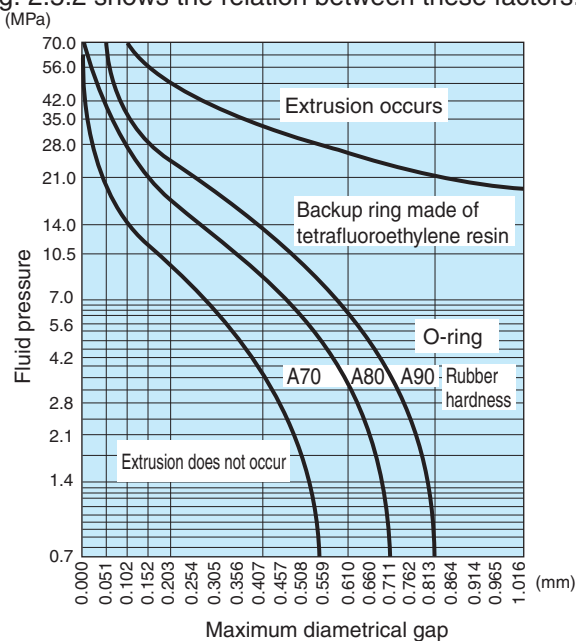

<O-ring test conditions>

1. Without backup ring
2. Expansion of cylinder inner diameter due to internal pressure of cylinder is not included.
3. These results were obtained after 100 thousand cycles at 2.5 Hz between zero pressure to the pressure specified in the diagram.

Fig. 2.5.2 O-ring and backup ring extrusion limit values

Expansion of cylinder inner diameter due to internal pressure of cylinder is not taken into consideration for the gap in the diagram above. If any expansion of the cylinder inner diameter may occur, the gap should be 75% of the values shown in the diagram, taking expansion of the gap into consideration.

Also, if an O-ring exceeds the values of the gaps in the figure above, use a backup ring.

(3) Fitting groove surface roughness

Fitting groove surface should be finished as specified in Table 2.5.2 below for the O-ring to have sufficient sealing performance and long service life, and to minimize frictional resistance.


Table 2.5.2 O-ring fitting groove surface roughness

Location	Purpose	Type of pressure		Surface roughness	
				μm Ra	μm Rz
Groove side and bottom	Static sealing	Constant	Flat surface	3.2	12.5
			Cylindrical surface		
		Pulsating	1.6	6.3	
	Dynamic sealing	With backup rings			
			Without backup ring		
O-ring sealed contact surface	Static sealing	Constant		0.8	3.2
			Pulsating	1.6	6.3
			0.8	3.2	
	Dynamic sealing	—		0.4	1.6
Chamfer area				3.2	12.5

(4) Chamfer of installation location

Provide chamfers on all edges of the cylinder and piston rod to prevent O-ring damage during installation, as shown in Table 2.5.3.

Table 2.5.3 Chamfer of O-ring installed area

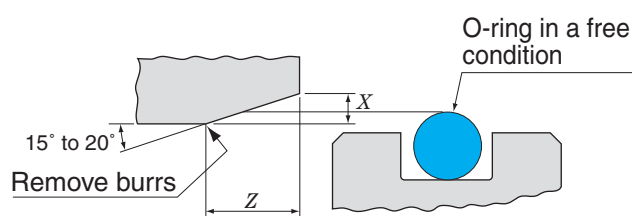

unit : mm


O-ring cross section diameter		X (min.)	Z ¹⁾	
Over	Up to		At 15°	At 20°
—	2.4	0.9	3.4	2.5
2.4	3.5	1.1	4.1	3
3.5	5.7	1.3	4.9	3.6
5.7	8.4	1.5	5.6	4.1

Note 1) Dimension Z is shown when dimension X is minimum.

When O-ring is used on piston seal, do not provide a pressure hole on the area on which the O-ring slides.

If the pressure hole must be installed in the area the O-ring is slid, chamfer the pressure hole (Fig.2.5.3). For the chamfering amount, see the Table 2.5.3.

When the pressure hole is not chamfered:

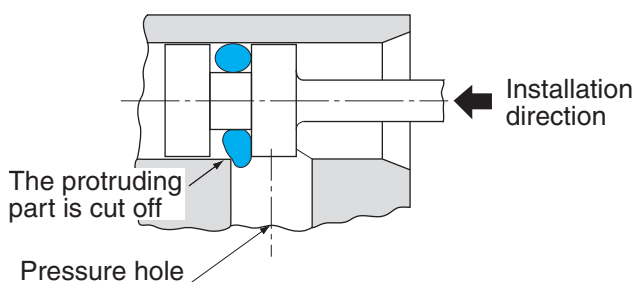

When the pressure hole is chamfered:

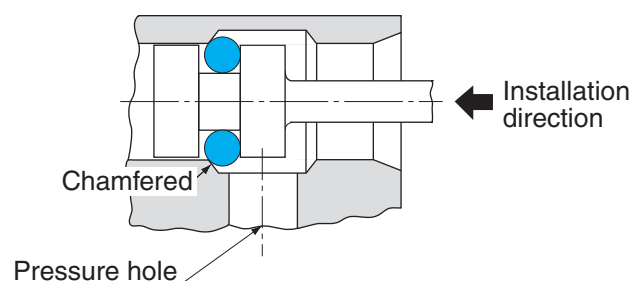


Fig. 2.5.3 Chamfer of pressure-hole edges

(5) Material and surface finishing of fitting groove parts

Cylinder material for dynamic-sealing application should be steel. The most suitable piston rod material is hardened steel.

Soft materials such as aluminum, brass, bronze, Monel metal and soft stainless steel are not suitable as a sliding surface material because of inferior abrasion resistance.

For static-sealing applications, materials should have sufficient strength to normal operation pressure and should also be resistant to pulsating pressure.

Surface finishing methods to minimize friction are honing, varnishing (roller varnishing), and polishing after hard nickel plating.

Hard-nickel plating is preferable for the application which requires heat resistance, abrasion resistance and low-friction.

Table 2.5.4 shows materials for fitting groove parts and their compatibility

Table 2.5.4 Groove materials and compatibility

Metal	Corrosion resistance	Abrasion resistance	Contamination resistance	Metal protection	O-ring	
					Static sealing	Dynamic sealing
Cadmium	×	×	×	◎	○	○
Chrome	◎	◎	◎	×	○	○
Copper	○	△	×	○	×	×
Gold	◎	△	◎	△	○	×
Iron	×	○	×	○	○	○
Lead	○	×	×	△	○	×
Nickel	○	○	△	○	○	○
Rhodium	◎	◎	◎	△	○	○
Silver	○	△	△	△	○	×
Tin	○	×	○	△	○	×
Zinc	×	×	×	◎	○	×
Remarks	◎ : Excellent △ : Acceptable ○ : Good × : No good				○ : Compatible × : Not compatible	

2.6 Handling of O-ring

(1) Storage

The following practices are advisable to keep O-ring quality for a long time.

- Do not store where exposed to direct sunlight.
- Store enclosed indoors where temperature is less than 30 °C and humidity is less than 65 %.
- Keep O-rings away from heat or ozone sources.
- O-rings should be sealed completely in packages when stored.
- Do not hang or suspend O-rings on hooks, wires, or strings.

(2) Handling

For good performance of O-ring, pay attention to the points shown below.

- Avoid reuse of used O-rings.
- When installing an O-ring, apply sealing medium (lubricant) to the O-ring and contact surface.
- Install an O-ring in the groove without twisting it.
- Do not clean O-ring equipped machine with cleaning oil or gasoline and protect O-ring from cleaning oil. Otherwise, it may be swollen, causing poor sealing performance.
- If an O-ring passes along the threaded surface or sharp edges on it during installation, provide any mechanism to prevent the O-ring from being damaged.

When fitting an O-ring, insert the cap onto the threaded surface as shown in Fig.2.6.1.

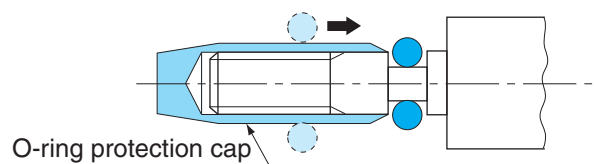


Fig. 2.6.1 O-ring installation jig




2.7 Typical O-ring failures, causes and countermeasures

When leakage is observed, investigate the causes and implement proper countermeasures.

To identify the causes, it is critical to observe the O-ring closely and evaluate the failure in all respects, such as cylinder, piston, and medium to be sealed.

Table 2.7.1 O-ring failures, causes and countermeasures

Ⓓ : Dynamic sealing Ⓔ : Static sealing

Appearance			Major causes	Countermeasures
Phenomenon	Condition			
④ Twist	Twisted and deformed		1) Excessive speed 2) Eccentric movements 3) Poor surface finish on sliding face 4) Twisted installation	• Replace with V-packing • Improve accuracy of equipment • Improve sliding surface finish • Install with care(Coat grease.)
④ Chipping	Partially chipped		• Chipped by the bore edge, threads, or sharp corner at installation	• Round all sharp edges • Use an installation jig
④ and ⑤ Permanent set	Deformed into the groove's shape		1) Exposure to repeated drastic temperature changes 2) Improper adjustment of temperature, compression, and fluid	• Study alternative rubber materials • Study groove dimensions
④ Abrasion around the circumference	Worn all round the circumference		1) Poor sliding surface finish 2) Poor lubrication 3) Entry of dust or other foreign materials	• Improve sliding surface finish • Supply sufficient lubrication • Clean thoroughly and use filter etc
④ and ⑤ Partial abrasion	Sliding surface is partially worn		• There are damages on sliding surface	• Remove damages on sliding surface and improve surface finish
⑤ Hardening	Hardened and cracked when bent		• Operating temperature is higher than the rubber's heat resistance limit	• Study alternative rubber materials
⑤ Swelling	Softened and swollen		1) Improper rubber material 2) Cleaned with fuel oil or other incompatible cleanser	• Study alternative rubber materials • Clean with kerosene
⑤ Scratch	Scratch marks are observed		• Scratched by a thread or sharp edge at installation	• Use an installation jig
⑤ Protrusion	The outside or inside of the ring is cut off partially or around the entire circumference		1) Inappropriate determination of pressure, gap and hardness 2) Due to swelling	• Restudy pressure, gap and hardness • Apply backup rings • Study alternative rubber materials
⑤ Tearing	The squeezed portion is cut off or chipped		1) Poor chamfer 2) Groove depth is not sufficient	• Improve chamfer • Restudy groove depth
⑤ Crack by ozone	Cracks are observed on all over the ring		• Left in the air in a stretched condition	• Do not stretch the ring • Coat grease or oil to the O-ring to avoid contact with air • Study alternative rubber materials


Remark) Dotted line shows original O-ring shape or size.

2.8 O-ring dimensional tables (Contents)


Code	O-ring dimensions (Unit mm)	Application	Page
JIS P	Cross section dia. d_2 Bore dia. d_1	General industrial machines Dynamic/static sealing	108
JIS G	Cross section dia. d_2 Bore dia. d_1	General industrial machines Static sealing	116
S	Cross section dia. d_2 Bore dia. d_1	General industrial machines Static sealing	118
Old ISO A, B, C, D, E	Cross section dia. d_2 Bore dia. d_1	General industrial machines	120
JASO	Cross section dia. d_2 Bore dia. d_1	Automobiles Dynamic/static sealing	124
AS	Cross section dia. d_2 Bore dia. d_1	Aircraft Static sealing and Dynamic/static sealing	130
BACKUP RING		For dynamic / static sealing of cylindrical surface	138
JIS V	Cross section dia. d_2 Bore dia. d_1	General industrial machines For Vacuum flanges	142

Material : JIS NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90, VMQ-70, FKM-70, FKM-90, HNBR-70, HNBR-90, ACM-70 and SBR-70 (Not standardized in the JIS)


■ O-ring shape and dimensions (unit : mm)

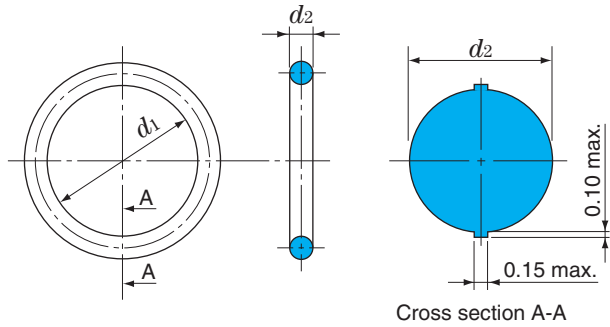


■ Fitting groove dimensions

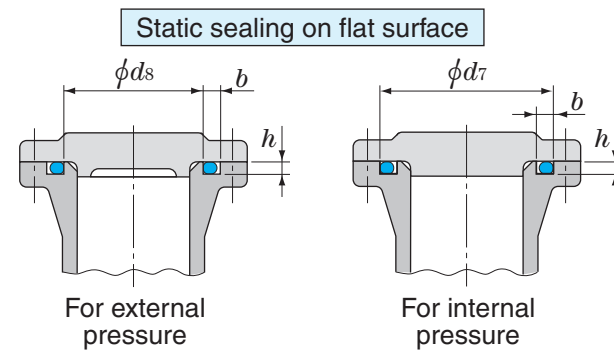


For static sealing on cylindrical surface

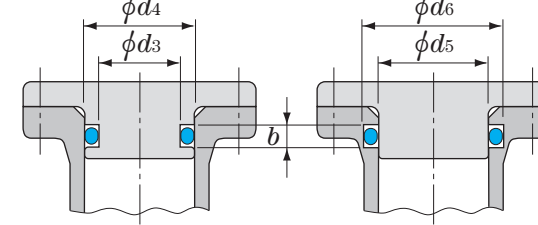

For dynamic sealing

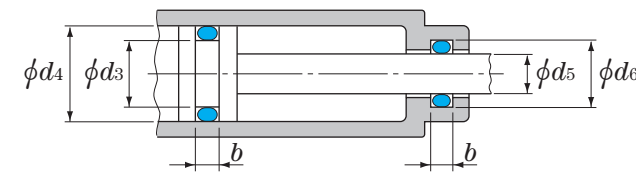


■ Fitting groove design (unit : mm)

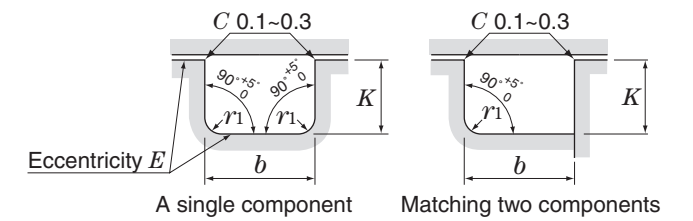

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

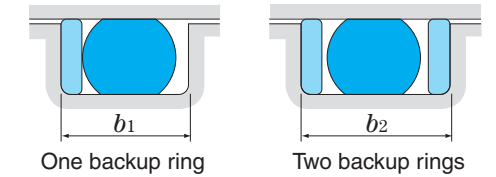

unit : mm

P 3~35

O-ring dimensions			O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface																						
Bore dia. $d_1^{1)}$		Cross section dia. d_2		$d_8^{2)}$ (for external pressure)	$d_7^{2)}$ (for internal pressure)	$b + 0.25$ 0	$h \pm 0.05$	r_1 max.			d_3, d_5	Reference fitting codes corresponding to d_3 and d_5 tolerances			d_4, d_6		³⁾ Fitting code	$b^{+0.25}_0$ Without backup ring	$b_1^{+0.25}_0$ With one backup ring	$b_2^{+0.25}_0$ With two backup rings	$E^{4)}$ max.	r_1 max.											
2.8	± 0.14	1.9 ± 0.08	P 3	3	6.2	2.5	1.4	0.4		P 3	3	0 −0.05	h9	f8	e9	6	+ 0.05 0	H10	2.5	3.9	5.4	0.05	0.4										
3.8	± 0.14		P 4	4	7.2					P 4	4					7																	
4.8	± 0.15		P 5	5	8.2					P 5	5					8																	
5.8	± 0.15		P 6	6	9.2					P 6	6					9																	
6.8	± 0.16		P 7	7	10.2					P 7	7					10																	
7.8	± 0.16		P 8	8	11.2					P 8	8					11																	
8.8	± 0.17	2.4 ± 0.09	P 9	9	12.2	3.2	1.8	0.4		P 9	9	0 −0.06			e8	12	+ 0.06 0		H9	14	3.2	4.4	6.0	0.05	0.4								
9.8	± 0.17		P 10	10	13.2					P 10	10					13																	
9.8	± 0.17		P 10A	10	14					P 10A	10					14																	
10.8	± 0.18		P 11	11	15					P 11	11					15																	
11.0	± 0.18		P 11.2	11.2	15.2					P 11.2	11.2					15.2																	
11.8	± 0.19		P 12	12	16					P 12	12					16																	
12.3	± 0.19	2.4 ± 0.09	P 12.5	12.5	16.5	3.2	1.8	0.4		P 12.5	12.5	0 −0.06			e8	16.5	+ 0.06 0			H9						16	3.2	4.4	6.0	0.05	0.4		
13.8	± 0.19		P 14	14	18					P 14	14					18																	
14.8	± 0.20		P 15	15	19					P 15	15					19																	
15.8	± 0.20		P 16	16	20					P 16	16					20																	
17.8	± 0.21		P 18	18	22					P 18	18					22																	
19.8	± 0.22		P 20	20	24					P 20	20					24																	
20.8	± 0.23	2.4 ± 0.09	P 21	21	25	3.2	1.8	0.4	P 21	21	0 −0.06	e7	25	+ 0.06 0	H9	25	3.2	4.4								6.0						0.05	0.4
21.8	± 0.24		P 22	22	26				P 22	22			26																				
21.7	± 0.24		P 22A	22	28				P 22A	22			28																				
22.1	± 0.24		P 22.4	22.4	28.4				P 22.4	22.4			28.4																				
23.7	± 0.24		P 24	24	30				P 24	24			30																				
24.7	± 0.25		P 25	25	31				P 25	25			31																				
25.2	± 0.25	3.5 ± 0.10	P 25.5	25.5	31.5	4.7	2.7	0.8	P 25.5	25.5	0 −0.08	e8	31.5	+ 0.08 0		H9			31		4.7	6.0	7.8	0.08	0.8								
25.7	± 0.26		P 26	26	32				P 26	26			32																				
27.7	± 0.28		P 28	28	34				P 28	28			34																				
28.7	± 0.29		P 29	29	35				P 29	29			35																				
29.2	± 0.29		P 29.5	29.5	35.5				P 29.5	29.5			35.5																				
29.7	± 0.29		P 30	30	36				P 30	30			36																				
30.7	± 0.30	3.5 ± 0.10	P 31	31	37	4.7	2.7	0.8	P 31	31	0 −0.08	e7	37	+ 0.08 0					H9	37							4.7	6.0	7.8	0.08	0.8		
31.2	± 0.31		P 31.5	31.5	37.5				P 31.5	31.5			37.5																				
31.7	± 0.31		P 32	32	38				P 32	32			38																				
33.7	± 0.33		P 34	34	40				P 34	34			40																				
34.7	± 0.34		P 35	35	41				P 35	35			41																				


Notes 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90 and SBR-70 (Not standardized in the JIS) products.
For VMQ-70 and ACM-70 products, the tolerance is 1.5 times these values, and for FKM-70, FKM-90, HNBR-70 and HNBR-90 products, 1.2 times.
2) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

3) The fitting code is corresponding to the d_4 and d_6 tolerances.



4) Eccentricity E means the difference between the maximum value and minimum value of dimension K .
The eccentricity can also be defined as double the coaxiality measurement.

Material : JIS NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90, VMQ-70, FKM-70, FKM-90, HNBR-70, HNBR-90, ACM-70 and SBR-70 (Not standardized in the JIS)


■ O-ring shape and dimensions (unit : mm)

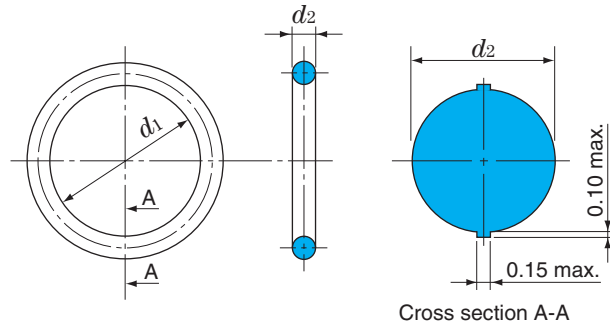

■ Fitting groove dimensions

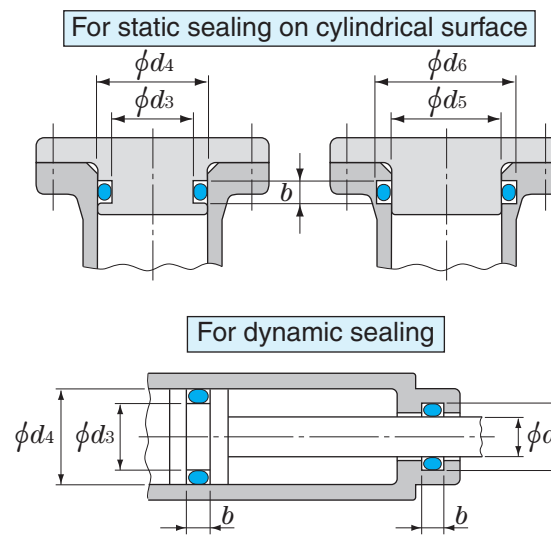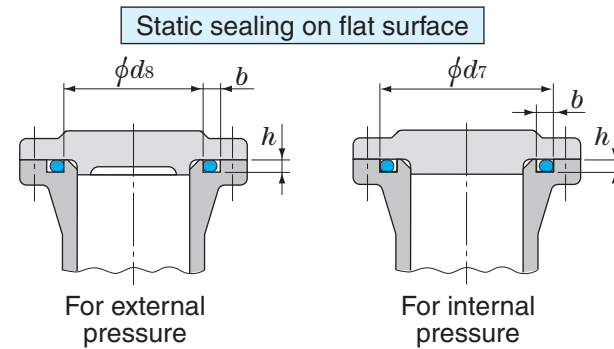


■ Fitting groove design (unit : mm)

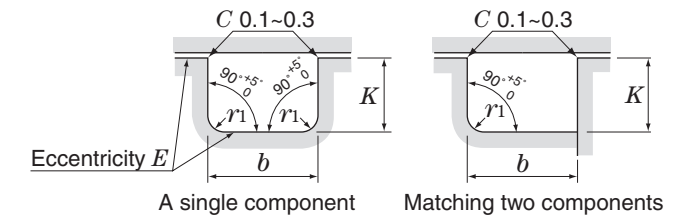

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

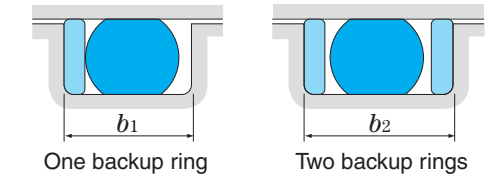

P 110~260

O-ring dimensions			O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface																					
Bore dia. $d_1^{1)}$		Cross section dia. d_2		$d_s^{2)}$ (for external pressure)	$d_i^{2)}$ (for internal pressure)	$b^{+0.25}_0$	$h \pm 0.05$	r_1 max.			d_3, d_5		Reference fitting codes corresponding to d_3 and d_5 tolerances			d_4, d_6		³⁾ Fitting code	$b^{+0.25}_0$ Without backup ring	$b_1^{+0.25}_0$ With one backup ring	$b_2^{+0.25}_0$ With two backup rings	$E^{4)}$ max.	r_1 max.									
109.6	± 0.91	5.7 ± 0.13	P 110	110	120	7.5	4.6	0.8		P 110	110	0 −0.10	h9	f8	e6	120	+ 0.10 0	H9	7.5	9.0	11.5	0.10	0.8									
111.6	± 0.92		P 112	112	122					P 112	112					122								P 150A	150	P 150A	150	165				
114.6	± 0.94		P 115	115	125					P 115	115					125								P 155	155	P 155	155	170				
119.6	± 0.98		P 120	120	130					P 120	120					130								P 160	160	P 160	160	175				
124.6	± 1.01		P 125	125	135					P 125	125					135								P 165	165	P 165	165	180				
129.6	± 1.05		P 130	130	140					P 125	125					135								P 170	170	P 170	170	185				
131.6	± 1.06		P 132	132	142					P 130	130					140								P 175	175	P 175	175	190				
134.6	± 1.09		P 135	135	145					P 132	132					142								P 180	180	P 180	180	195				
139.6	± 1.12		P 140	140	150					P 135	135					145								P 185	185	P 185	185	200				
144.6	± 1.16	P 145	145	155	P 140	140	150	P 190		190	P 190			190	205																	
149.6	± 1.19	P 150	150	160	P 145	145	155	P 195		195	P 195			195	210																	
149.5	± 1.19	8.4 ± 0.15	P 150A	150	165	11.0	6.9	1.2		P 150A	150			0 −0.10	h8	f7				165	+ 0.10 0	H8	11.0	13.0	17.0	0.12	1.2					
154.5	± 1.23		P 155	155	170					P 155	155									170								P 200	200	P 200	200	215
159.5	± 1.26		P 160	160	175					P 160	160									175								P 205	205	P 205	205	220
164.5	± 1.30		P 165	165	180					P 165	165									180								P 209	209	P 209	209	224
169.5	± 1.33		P 170	170	185					P 170	170									185								P 210	210	P 210	210	225
174.5	± 1.37		P 175	175	190					P 175	175									190								P 215	215	P 215	215	230
179.5	± 1.40		P 180	180	195					P 180	180									195								P 220	220	P 220	220	235
184.5	± 1.44		P 185	185	200				P 185	185	200	P 225	225				P 225			225								240				
189.5	± 1.48		P 190	190	205				P 190	190	205	P 230	230				P 230			230								245				
194.5	± 1.51		P 195	195	210				P 195	195	210	P 235	235				P 235			235								250				
199.5	± 1.55		P 200	200	215				P 200	200	215	P 240	240				P 240			240								255				
204.5	± 1.58		P 205	205	220				P 205	205	220	P 245	245				P 245			245								260				
208.5	± 1.61		P 209	209	224				P 209	209	224	P 250	250				P 250			250								265				
209.5	± 1.62		P 210	210	225				P 210	210	225	P 255	255				P 255			255								270				
214.5	± 1.65		P 215	215	230				P 215	215	230	P 260	260				P 260			260								275				
219.5	± 1.68		P 220	220	235				P 220	220						235																
224.5	± 1.71		P 225	225	240				P 225	225						240								P 245	245	P 245	245	255				
229.5	± 1.75		P 230	230	245				P 230	230						245								P 250	250	P 250	250	265				
234.5	± 1.78		P 235	235	250				P 235	235						250								P 255	255	P 255	255	270				
239.5	± 1.81		P 240	240	255				P 240	240						255								P 260	260	P 260	260	275				
244.5	± 1.84		P 245	245	260				P 245	245						260																
249.5	± 1.88		P 250	250	265				P 250	250						265								P 255	255	P 255	255	270				
254.5	± 1.91		P 255	255	270				P 255	255						270								P 260	260	P 260	260	275				
259.5	± 1.94		P 260	260	275				P 260	260						275								P 260	260	P 260	260	275				


Notes 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90 and SBR-70 (Not standardized in the JIS) products.
For VMQ-70 and ACM-70 products, the tolerance is 1.5 times these values, and for FKM-70, FKM-90, HNBR-70 and HNBR-90 products, 1.2 times.
2) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

3) The fitting code is corresponding to the d_4 and d_6 tolerances.



4) Eccentricity E means the difference between the maximum value and minimum value of dimension K .
The eccentricity can also be defined as double the coaxiality measurement.

Material : JIS NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90, VMQ-70, FKM-70, FKM-90, HNBR-70, HNBR-90, ACM-70 and SBR-70 (Not standardized in the JIS)


■ O-ring shape and dimensions (unit : mm)

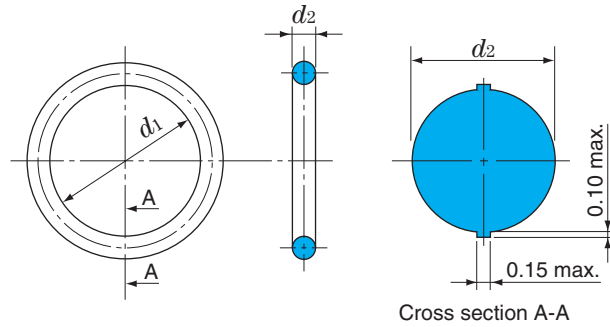

■ Fitting groove dimensions

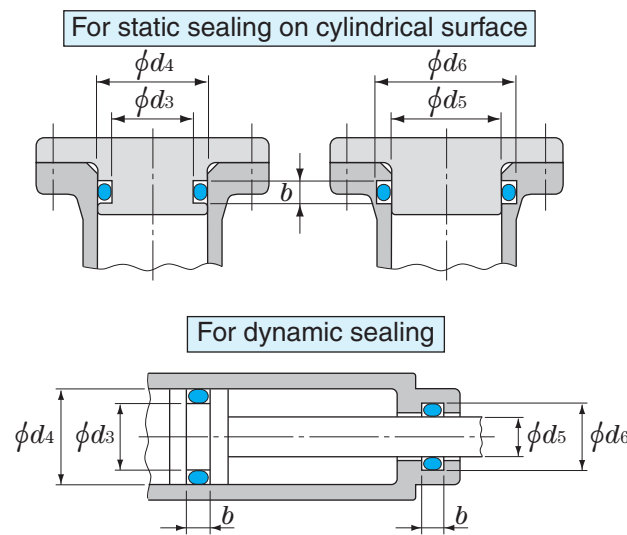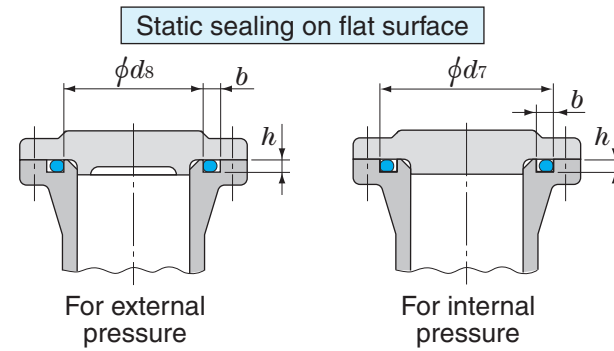


■ Fitting groove design (unit : mm)

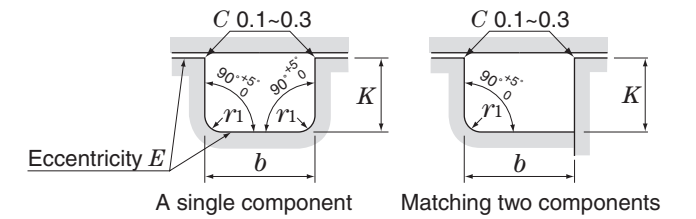

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

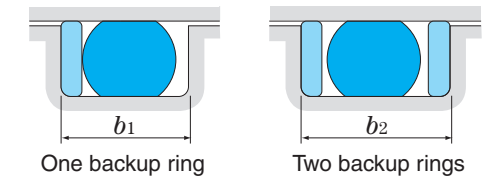

unit : mm

P 265~400


O-ring dimensions			O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface													
Bore dia. $d_1^{1)}$		Cross section dia. d_2		$d_s^{2)}$ (for external pressure)	$d_7^{2)}$ (for internal pressure)	$b^{+0.25}_0$	$h \pm 0.05$	r_1 max.			d_3, d_5		Reference fitting codes corresponding to d_3 and d_5 tolerances			d_4, d_6		³⁾ Fitting code	$b^{+0.25}_0$ Without backup ring	$b_1^{+0.25}_0$ With one backup ring	$b_2^{+0.25}_0$ With two backup rings	$E^{4)}$ max.	r_1 max.	
264.5	± 1.97	8.4 ± 0.15	P 265	265	280	11.0	6.9	1.2		P 265	265	0 −0.10	h8	f6		280	+ 0.10 0	H8	11.0	13.0	17.0	0.12	1.2	
269.5	± 2.01		P 270	270	285					P 270	270													285
274.5	± 2.04		P 275	275	290					P 275	275													290
279.5	± 2.07		P 280	280	295					P 280	280													295
284.5	± 2.10		P 285	285	300					P 285	285													300
289.5	± 2.14		P 290	290	305					P 290	290													305
294.5	± 2.17		P 295	295	310					P 295	295													310
299.5	± 2.20		P 300	300	315					P 300	300													315
314.5	± 2.30		P 315	315	330					P 315	315													330
319.5	± 2.33		P 320	320	335					P 320	320													335
334.5	± 2.42		P 335	335	350					P 335	335													350
339.5	± 2.45		P 340	340	355					P 340	340													355
354.5	± 2.54		P 355	355	370					P 355	355													370
359.5	± 2.57		P 360	360	375					P 360	360													375
374.5	± 2.67		P 375	375	390					P 375	375													390
384.5	± 2.73		P 385	385	400					P 385	385													400
399.5	± 2.82		P 400	400	415					P 400	400													415

- Notes 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90 and SBR-70 (Not standardized in the JIS) products. For VMQ-70 and ACM-70 products, the tolerance is 1.5 times these values, and for FKM-70, FKM-90, HNBR-70 and HNBR-90 products, 1.2 times.
- 2) For a static sealing application on a flat surface, design the groove according to dimension d_s for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.



- 3) The fitting code is corresponding to the d_4 and d_6 tolerances.
- 4) Eccentricity E means the difference between the maximum value and minimum value of dimension K . The eccentricity can also be defined as double the coaxiality measurement.

Material : JIS NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90, VMQ-70, FKM-70, FKM-90, HMBR-70, HMBR-90, ACM-70 and SBR-70 (Not standardized in the JIS)


■ O-ring shape and dimensions (unit : mm)

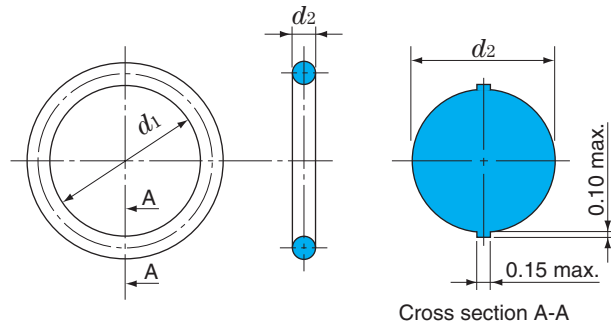

■ Fitting groove dimensions

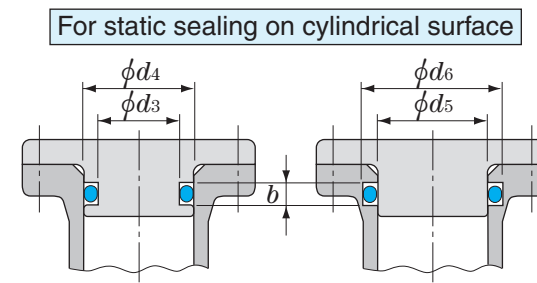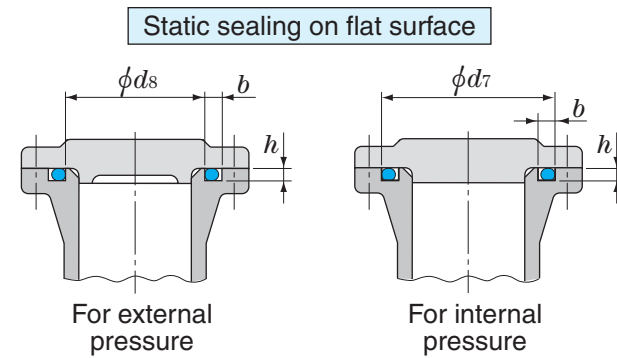


■ Fitting groove design (unit : mm)

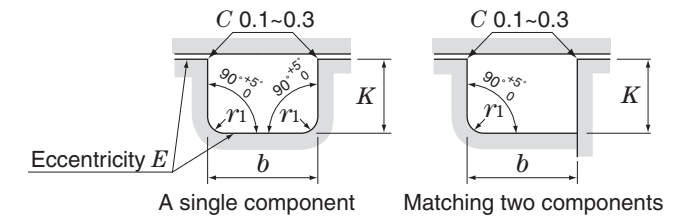

■ Backup rings

(For static sealing on cylindrical surface)

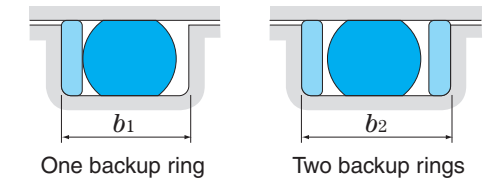


G 25~300

O-ring dimensions			O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for static sealing on cylindrical surface																				
Bore dia. d_1 ¹⁾	Cross section dia. d_2	d_8 ²⁾ (for external pressure)		d_7 ²⁾ (for internal pressure)	$b + 0.25$ 0	$h \pm 0.05$	r_1 max.	d_3, d_5			Reference fitting codes corresponding to d_3 and d_5 tolerances			d_4, d_6		³⁾ Fitting code	$b + 0.25$ 0 Without backup ring	$b_1 + 0.25$ 0 With one backup ring	$b_2 + 0.25$ 0 With two backup rings	E ⁴⁾ max.	r_1 max.										
24.4 29.4 34.4	± 0.25 ± 0.29 ± 0.33	3.1 ± 0.10	G 25 G 30 G 35	25 30 35	30 35 40	4.1	2.4	0.7		G 25 G 30 G 35	25 30 35	0 − 0.10	h9	f8	e9	30 35 40	+ 0.10 0	H10	4.1	5.6	7.3	0.08	0.7								
39.4 44.4 49.4	± 0.37 ± 0.41 ± 0.45		G 40 G 45 G 50	40 45 50	45 50 55					G 40 G 45 G 50	40 45 50					e8								45 50 55							
54.4 59.4 64.4	± 0.49 ± 0.53 ± 0.57		G 55 G 60 G 65	55 60 65	60 65 70					G 55 G 60 G 65	55 60 65				e7									60 65 70							
69.4 74.4 79.4	± 0.61 ± 0.65 ± 0.69		G 70 G 75 G 80	70 75 80	75 80 85					G 70 G 75 G 80	70 75 80					75 80 85															
84.4 89.4 94.4	± 0.73 ± 0.77 ± 0.81		G 85 G 90 G 95	85 90 95	90 95 100					G 85 G 90 G 95	85 90 95					e6								90 95 100							
99.4 104.4 109.4	± 0.85 ± 0.87 ± 0.91		G 100 G 105 G 110	100 105 110	105 110 115					G 100 G 105 G 110	100 105 110				105 110 115																
114.4 119.4 124.4	± 0.94 ± 0.98 ± 1.01		G 115 G 120 G 125	115 120 125	120 125 130					G 115 G 120 G 125	115 120 125				120 125 130																
129.4 134.4 139.4 144.4	± 1.05 ± 1.08 ± 1.12 ± 1.16		G 130 G 135 G 140 G 145	130 135 140 145	135 140 145 150					G 130 G 135 G 140 G 145	130 135 140 145				f7	h8								f6	135 140 145 150	H9	7.5	9.0	11.5	0.10	0.8
149.3 154.3 159.3	± 1.19 ± 1.23 ± 1.26		G 150 G 155 G 160	150 155 160	160 165 170					G 150 G 155 G 160	150 155 160														160 165 170						
164.3 169.3 174.3	± 1.30 ± 1.33 ± 1.37		G 165 G 170 G 175	165 170 175	175 180 185					G 165 G 170 G 175	165 170 175														175 180 185						
179.3 184.3 189.3	± 1.40 ± 1.44 ± 1.47		G 180 G 185 G 190	180 185 190	190 195 200					G 180 G 185 G 190	180 185 190														190 195 200						
194.3 199.3 209.3	± 1.51 ± 1.55 ± 1.61		G 195 G 200 G 210	195 200 210	205 210 220					G 195 G 200 G 210	195 200 210														205 210 220						
219.3 229.3 239.3	± 1.68 ± 1.73 ± 1.81		G 220 G 230 G 240	220 230 240	230 240 250					G 220 G 230 G 240	220 230 240														230 240 250						
249.3 259.3 269.3	± 1.88 ± 1.94 ± 2.01		G 250 G 260 G 270	250 260 270	260 270 280					G 250 G 260 G 270	250 260 270														260 270 280						
279.3 289.3 299.3	± 2.07 ± 2.14 ± 2.20		G 280 G 290 G 300	280 290 300	290 300 310					G 280 G 290 G 300	280 290 300														290 300 310						



Notes 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90 and SBR-70 (Not standardized in the JIS) products.
For VMQ-70 and ACM-70 products, the tolerance is 1.5 times these values, and for FKM-70, FKM-90, HNBR-70 and HNBR-90 products, 1.2 times.
2) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

3) The fitting code is corresponding to the d_4 and d_6 tolerances.
4) Eccentricity E means the difference between the maximum value and minimum value of dimension K .
The eccentricity can also be defined as double the coaxiality measurement.


■ O-ring shape and dimensions (unit : mm)

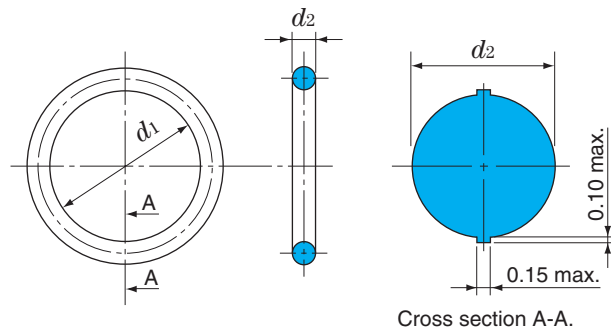

■ Fitting groove dimensions

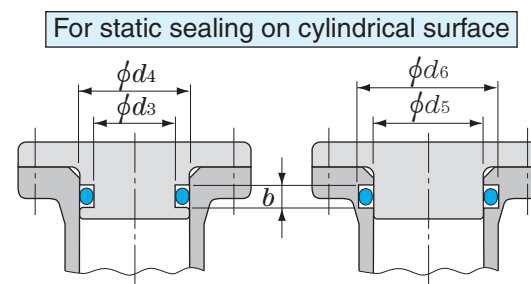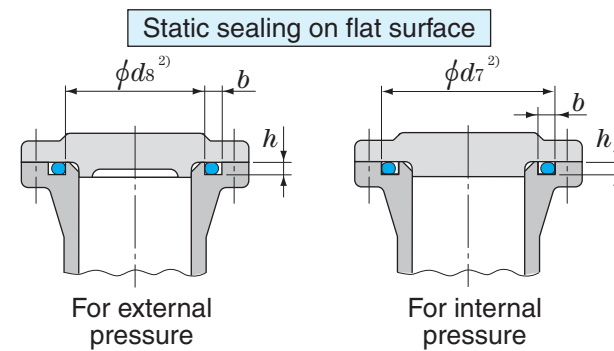

■ Fitting groove design (unit : mm)

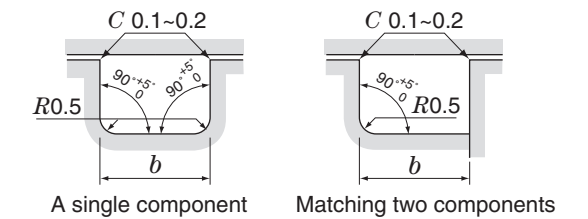

S 3~40

unit : mm

O-ring dimensions		O-ring No.	Groove dimensions				
Bore dia. d_1 ¹⁾	Cross section dia. d_2		d_3, d_5, d_8 ²⁾ 0 -0.05	d_4, d_6 ²⁾ +0.05 0	d_7 ²⁾	b ²⁾ +0.25 0	h ²⁾ 0 -0.1
2.5	1.5 ± 0.1	S 3	3	5	5.3	2.5	1.0
3.5		S 4	4	6	6.3		
4.5		S 5	5	7	7.3		
5.5		S 6	6	8	8.3		
6.5		S 7	7	9	9.3		
7.5		S 8	8	10	10.3		
8.5		S 9	9	11	11.3		
9.5		S 10	10	12	12.3		
10.7		S 11.2	11.2	13.2	13.5		
11.5		S 12	12	14	14.3		
12.0	± 0.15	S 12.5	12.5	14.5	14.8	2.7	1.5
13.5		S 14	14	16	16.3		
14.5		S 15	15	17	17.3		
15.5		S 16	16	18	18.3		
17.5		S 18	18	20	20.3		
19.5		S 20	20	22	22.3		
21.5		S 22	22	24	24.3		
21.9		S 22.4	22.4	25.4	25.9		
23.5		S 24	24	27	27.5		
24.5		S 25	25	28	28.5		
25.5		S 26	26	29	29.5		
27.5		S 28	28	31	31.5		
28.5		S 29	29	32	32.5		
29.5		S 30	30	33	33.5		
31.0		S 31.5	31.5	34.5	35		
31.5		S 32	32	35	35.5		
33.5		S 34	34	37	37.5		
34.5		S 35	35	38	38.5		
35.0		S 35.5	35.5	38.5	39		
35.5	2.0 ± 0.1	S 36	36	39	39.5		
37.5		S 38	38	41	41.5		
38.5		S 39	39	42	42.5		
39.5		S 40	40	43	43.5		


- Notes 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, products.
For FKM-70 products, the tolerance is 2 times these values.
- 2) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

S 42~150

unit : mm

O-ring dimensions		O-ring No.	Groove dimensions				
Bore dia. d_1 ¹⁾	Cross section dia. d_2		d_3, d_5, d_8 ²⁾ 0 -0.05	d_4, d_6 ²⁾ +0.05 0	d_7 ²⁾	b ²⁾ +0.25 0	h ²⁾ 0 -0.1
41.5	± 0.25	S 42	42	45	45.5	2.7	1.5
43.5		S 44	44	47	47.5		
44.5		S 45	45	48	48.5		
45.5		S 46	46	49	49.5		
47.5		S 48	48	51	51		
49.5		S 50	50	53	53		
52.5		S 53	53	56	56		
54.5		S 55	55	58	58		
55.5		S 56	56	59	59		
59.5		S 60	60	63	63		
62.5	2.0 ± 0.1	S 63	63	66	66	2.7	1.5
64.5		S 65	65	68	68		
66.5		S 67	67	70	70		
69.5		S 70	70	73	73		
70.5		S 71	71	74	74		
74.5		S 75	75	78	78		
79.5		S 80	80	83	83		
84.5		S 85	85	88	88		
89.5		S 90	90	93	93		
94.5		S 95	95	98	98		
99.5	± 0.40	S 100	100	103	103	2.7	1.5
104.5		S 105	105	108	108		
109.5		S 110	110	113	113		
111.5		S 112	112	115	115		
114.5		S 115	115	118	118		
119.5		S 120	120	123	123		
124.5		S 125	125	128	128		
129.5		S 130	130	133	133		
131.5		S 132	132	135	135		
134.5		S 135	135	138	138		
139.5	± 0.60	S 140	140	143	143	2.7	1.5
144.5		S 145	145	148	148		
149.5		S 150	150	153	153		

■ O-ring shape and dimensions (unit : mm)

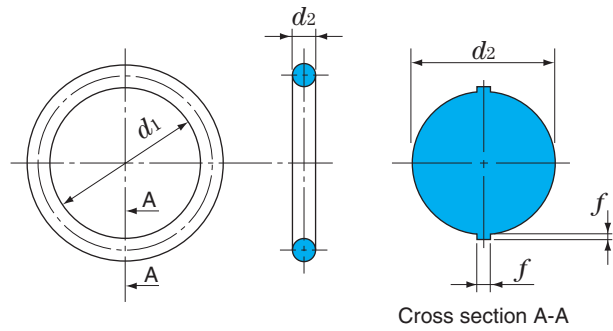


d₁ 1.8~20

unit : mm

Cross section dia. d_2		1.80 ± 0.08	2.65 ± 0.09	3.55 ± 0.10	5.30 ± 0.13	7.00 ± 0.15
Dike width and height f		Up to 0.1	Up to 0.12	Up to 0.14	Up to 0.16	Up to 0.18
Bore dia. d_1	Tolerance	O-ring No.				
1.80	± 0.13	A0018G				
2.00		A0020G				
2.24		A0022G				
2.50		A0025G				
2.80	± 0.14	A0028G				
3.15		A0031G				
3.55		A0035G				
3.75		A0037G				
4.00		A0040G				
4.50		A0045G				
4.87	± 0.15	A0048G				
5.00		A0050G				
5.15		A0051G				
5.30		A0053G				
5.60		A0056G				
6.00		A0060G				
6.30		A0063G				
6.70	± 0.16	A0067G				
6.90		A0069G				
7.10		A0071G				
7.50		A0075G				
8.00		A0080G				
8.50		A0085G				
8.75	± 0.17	A0087G				
9.00		A0090G				
9.50		A0095G				
10.0		A0100G				
10.6	± 0.18	A0106G				
11.2		A0112G				
11.8	± 0.19	A0118G				
12.5		A0125G				
13.2		A0132G				
14.0		A0140G				
15.0	± 0.20	A0150G	B0140G			
16.0		A0160G	B0150G B0160G			
17.0	± 0.21	A0170G	B0170G	C0180G		
18.0			B0180G			
19.0	± 0.22		B0190G	C0190G		
20.0			B0200G	C0200G		

* Old ISO: Applies to the ISO series of the old JIS standard

■ Fitting groove dimensions (unit : mm)

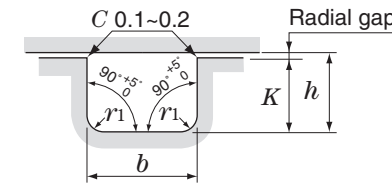

Cross section dia. d ₂	Corner radius r ₁
1.80	0.3 ± 0.1
2.65	
3.55	0.6 ± 0.2
5.30	
7.00	1.0 ± 0.2

1) Groove depth K

Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.

Therefore: $K = h - \text{gap in radial}$
d₂: O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.


$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$

d₁ 21.2~75

unit : mm

Cross section dia. d_2		1.80 ± 0.08	2.65 ± 0.09	3.55 ± 0.10	5.30 ± 0.13	7.00 ± 0.15	
Dike width and height f		Up to 0.1	Up to 0.12	Up to 0.14	Up to 0.16	Up to 0.18	
Bore dia. d_1	Tolerance	O-ring No.					
21.2	± 0.23		B0212G	C0212G			
22.4	± 0.24		B0224G	C0224G			
23.6			B0236G	C0236G			
25.0			B0250G	C0250G			
25.8	± 0.26		B0258G	C0258G			
26.5			B0265G	C0265G			
28.0			B0280G	C0280G			
30.0	± 0.28		B0300G	C0300G			
31.5	± 0.29		B0315G	C0315G			
32.5	± 0.31						
33.5	± 0.32						
34.5	± 0.32						
35.5	± 0.33						
36.5	± 0.34						
37.5	± 0.35						
38.7	± 0.36		B0325G	C0325G			
40.0	± 0.37		B0335G	C0335G			
41.2	± 0.38		B0345G	C0345G			
42.5	± 0.39						
43.7	± 0.40						
44.5	± 0.41						
45.0	± 0.42						
46.2	± 0.43						
47.5	± 0.44						
48.7	± 0.45						
50.0	± 0.46						
51.5	± 0.47				C0400G		D0400G
53.0	± 0.48				C0412G		D0412G
54.5	± 0.50				C0425G		D0425G
56.0	± 0.51				C0437G		D0437G
58.0	± 0.52		C0450G	D0450G			
60.0	± 0.54		C0462G	D0462G			
61.5	± 0.55		C0475G	D0475G			
63.0	± 0.56		C0487G	D0487G			
65.0	± 0.58		C0500G	D0500G			
67.0	± 0.59		C0515G	D0515G			
69.0	± 0.61		C0530G	D0530G			
71.0	± 0.63		C0545G	D0545G			
73.0	± 0.64		C0560G	D0560G			
75.0	± 0.66		C0580G	D0580G			
			C0600G	D0600G			
			C0615G	D0615G			
			C0630G	D0630G			
			C0650G	D0650G			
			C0670G	D0670G			
			C0690G	D0690G			
			C0710G	D0710G			
			C0730G	D0730G			
		C0750G	D0750G				

■ O-ring shape and dimensions (unit : mm)

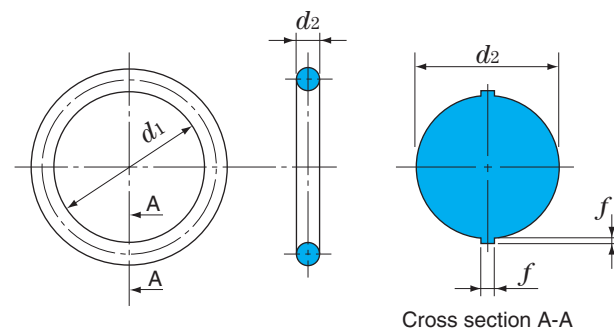


d₁ 77.5~230

unit : mm

Cross section dia. d_2		1.80 ± 0.08	2.65 ± 0.09	3.55 ± 0.10	5.30 ± 0.13	7.00 ± 0.15
Dike width and height f		Up to 0.1	Up to 0.12	Up to 0.14	Up to 0.16	Up to 0.18
Bore dia. d_1	Tolerance	O-ring No.				
77.5	± 0.67			C0775G	D0775G	
80.0	± 0.69			C0800G	D0800G	
82.5	± 0.71			C0825G	D0825G	
85.0	± 0.73			C0850G	D0850G	
87.5	± 0.75			C0875G	D0875G	
90.0	± 0.77			C0900G	D0900G	
92.5	± 0.79			C0925G	D0925G	
95.0	± 0.81			C0950G	D0950G	
97.5	± 0.83			C0975G	D0975G	
100	± 0.84			C1000G	D1000G	
103	± 0.87			C1030G	D1030G	
106	± 0.89			C1060G	D1060G	
109	± 0.91			C1090G	D1090G	E1090G
112	± 0.93			C1120G	D1120G	E1120G
115	± 0.95			C1150G	D1150G	E1150G
118	± 0.97			C1180G	D1180G	E1180G
122	± 1.00			C1220G	D1220G	E1220G
125	± 1.03			C1250G	D1250G	E1250G
128	± 1.05			C1280G	D1280G	E1280G
132	± 1.08			C1320G	D1320G	E1320G
136	± 1.10			C1360G	D1360G	E1360G
140	± 1.13			C1400G	D1400G	E1400G
145	± 1.17			C1450G	D1450G	E1450G
150	± 1.20			C1500G	D1500G	E1500G
155	± 1.24	C1550G	D1550G	E1550G		
160	± 1.27	C1600G	D1600G	E1600G		
165	± 1.31	C1650G	D1650G	E1650G		
170	± 1.34	C1700G	D1700G	E1700G		
175	± 1.38	C1750G	D1750G	E1750G		
180	± 1.41	C1800G	D1800G	E1800G		
185	± 1.44	C1850G	D1850G	E1850G		
190	± 1.48	C1900G	D1900G	E1900G		
195	± 1.51	C1950G	D1950G	E1950G		
200	± 1.55	C2000G	D2000G	E2000G		
206	± 1.59			D2060G	E2060G	
212	± 1.63			D2120G	E2120G	
218	± 1.67			D2180G	E2180G	
224	± 1.71			D2240G	E2240G	
230	± 1.75			D2300G	E2300G	

* Old ISO: Applies to the ISO series of the old JIS standard

■ Fitting groove dimensions (unit : mm)

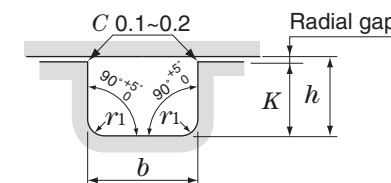

Cross section dia. d ₂	Corner radius r ₁
1.80 2.65	0.3 ± 0.1
3.55 5.30	0.6 ± 0.2
7.00	1.0 ± 0.2

d₁ 236~670

unit : mm

Cross section dia. d_2		1.80 ± 0.08	2.65 ± 0.09	3.55 ± 0.10	5.30 ± 0.13	7.00 ± 0.15		
Dike width and height f		Up to 0.1	Up to 0.12	Up to 0.14	Up to 0.16	Up to 0.18		
Bore dia. d_1	Tolerance	O-ring No.						
236	± 1.79				D2360G	E2360G		
243	± 1.83				D2430G	E2430G		
250	± 1.88				D2500G	E2500G		
258	± 1.93				D2580G	E2580G		
265	± 1.98				D2650G	E2650G		
272	± 2.02				D2720G	E2720G		
280	± 2.08				D2800G	E2800G		
290	± 2.14				D2900G	E2900G		
300	± 2.21				D3000G	E3000G		
307	± 2.25				D3070G	E3070G		
315	± 2.30				D3150G	E3150G		
325	± 2.37				D3250G	E3250G		
335	± 2.43				D3350G	E3350G		
345	± 2.49				D3450G	E3450G		
355	± 2.56				D3550G	E3550G		
365	± 2.62				D3650G	E3650G		
375	± 2.68				D3750G	E3750G		
387	± 2.76				D3870G	E3870G		
400	± 2.84				D4000G	E4000G		
412	± 2.91							E4120G
425	± 2.99							E4250G
437	± 3.07							E4370G
450	± 3.15							E4500G
462	± 3.22							E4620G
475	± 3.30							E4750G
487	± 3.37							E4870G
500	± 3.45							E5000G
515	± 3.54							E5150G
530	± 3.63							E5300G
545	± 3.72							E5450G
560	± 3.81							E5600G
580	± 3.93							E5800G
600	± 4.05	E6000G						
615	± 4.13	E6150G						
630	± 4.22	E6300G						
650	± 4.34	E6500G						
670	± 4.46	E6700G						

1) Groove depth K

Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.


Therefore: $K = h - \text{gap in radial}$
d₂: O-ring cross section diameter

2) Groove width b


Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$


■ O-ring shape and dimensions (unit : mm)

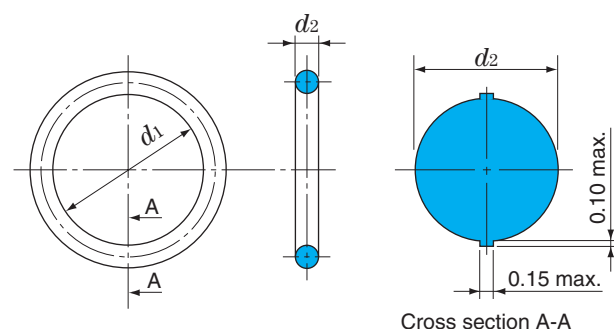


■ Fitting groove dimensions

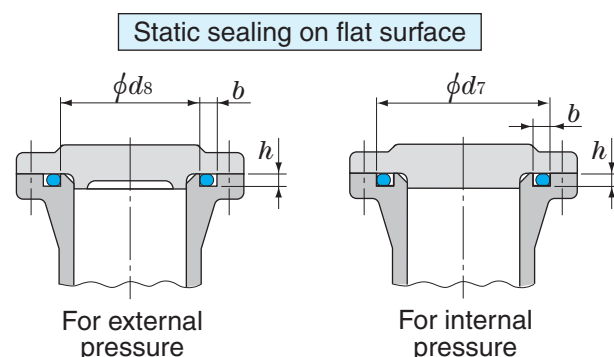


For static sealing on cylindrical surface

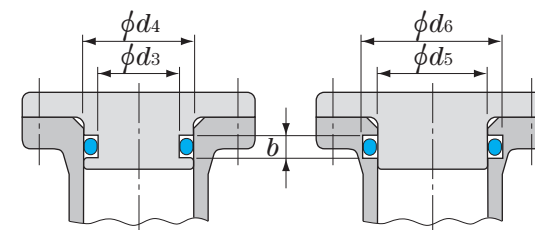

For dynamic sealing

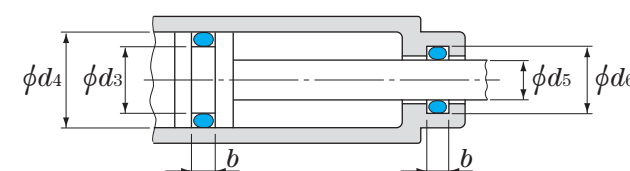


■ Fitting groove design (unit : mm)

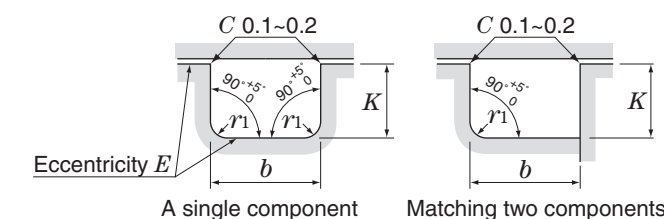

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

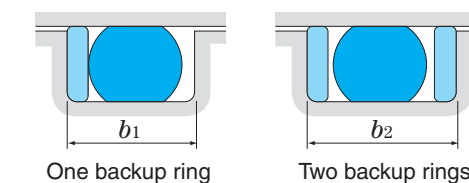


unit : mm

d2 1.9


O-ring dimensions		O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface														
Bore dia. d_1	Cross section dia. d_2		d_8 ¹⁾ (for external pressure)	d_7 ¹⁾ (for internal pressure)	$b + 0.25$ 0	$h \pm 0.05$	r_1 max.			d_3	d_5	Tolerances of d_3 and d_5	d_4	d_6	Tolerances of d_4 and d_6	$b + 0.25$ 0 Without backup ring	$b_1 + 0.25$ 0 With one backup ring	$b_2 + 0.25$ 0 With two backup rings	E ²⁾ max.	r_1 max.				
2.8 3.8 4.8	Classes 1-A and 2 ± 0.12	1.9 ± 0.07	JASO 1003	3	6.3	2.5	1.4	0.4		JASO 1003	3.1	3	0 − 0.05	6	5.9	+ 0.05 0	2.5	3.9	5.4	0.05	0.4			
JASO 1004			4	7.3	JASO 1004					4.1	4	7		6.9										
JASO 1005			5	8.3	JASO 1005					5.1	5	8		7.9										
JASO 1006			6	9.3	JASO 1006					6.1	6	9		8.9										
JASO 1007			7	10.3	JASO 1007					7.1	7	10		9.9										
JASO 1008			8	11.3	JASO 1008					8.1	8	11		10.9										
8.8 9.8 11.0	Classes 3 and 4-D ± 0.24		JASO 1009	9	12.3					JASO 1009	9.1	9	0 − 0.06	12	11.9	+ 0.06 0								
JASO 1010			10	13.3	JASO 1010					10.1	10	13		12.9										
JASO 1011			11.2	14.4	JASO 1011					11.3	11.2	14.2		14.1										
12.3 13.0 13.8	Classes 4-C, 4-E and 5 ± 0.36		JASO 1012	12.5	15.7					JASO 1012	12.6	12.5		0 − 0.06	15.5							15.4	+ 0.08 0	
JASO 1013			13.2	16.4	JASO 1013					13.3	13.2	16.2			16.1									
JASO 1014			14	17.2	JASO 1014					14.1	14	17			16.9									
JASO 1015			15	18.2	JASO 1015					15.1	15	18	17.9											
JASO 1016			16	19.2	JASO 1016					16.1	16	19	18.9											
JASO 1017			17	20.2	JASO 1017					17.1	17	20	19.2											
16.8 17.8	Classes 1-A and 2 ± 0.15		JASO 1018	18	21.2					JASO 1018	18.1	18	0 − 0.06	21	20.9	+ 0.08 0								
18.8 19.8 21.0			JASO 1019	19	22.2					JASO 1019	19.1	19		22	21.9									
JASO 1020			20	23.2	JASO 1020					20.1	20	23		22.9										
JASO 1021			21.2	24.4	JASO 1021					21.3	21.2	24.2		24.1										
22.1 23.3 24.7			Classes 3 and 4-D ± 0.3	JASO 1022	22.4					25.5	JASO 1022	22.5		22.4	0 − 0.08							25.4	25.3	+ 0.08 0
JASO 1023				23.6	26.7					JASO 1023	23.7	23.6		26.6								26.5		
JASO 1025	25			28.1	JASO 1025					25.1	25	28	27.9											
26.2 27.7 29.7	Classes 4-C, 4-E and 5 ± 0.45		JASO 1026	26.5	29.6					JASO 1026	26.6	26.5	0 − 0.08	29.5		29.4						+ 0.08 0		
JASO 1028			28	31.1	JASO 1028					28.1	28	31		30.9										
JASO 1030			30	33.1	JASO 1030					30.1	30	33		32.9										
31.2 33.2 35.2			JASO 1031	31.5	34.6					JASO 1031	31.6	31.5		34.5	34.4									
JASO 1033			33.5	36.6	JASO 1033					33.6	33.5	36.5		36.4										
JASO 1035			35.5	38.6	JASO 1035					35.6	35.5	38.5		38.4										

- Notes 1) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.
- 2) Eccentricity E means the difference between the maximum value and minimum value of dimension K . The eccentricity can also be defined as double the coaxiality measurement.


■ O-ring shape and dimensions (unit : mm)

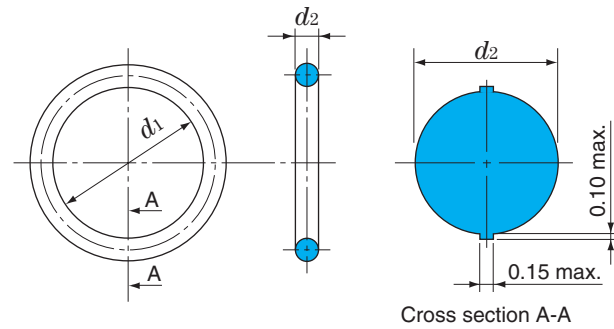


■ Fitting groove dimensions

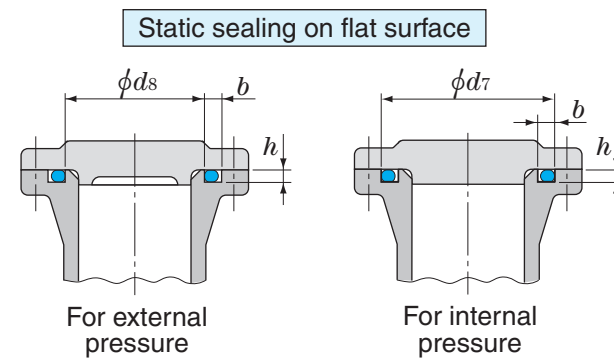


For static sealing on cylindrical surface

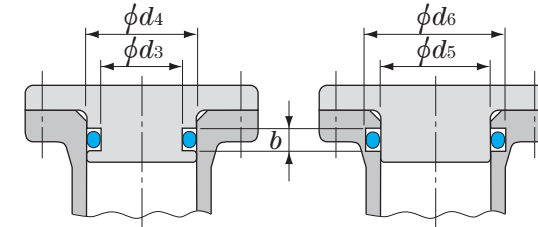

For dynamic sealing

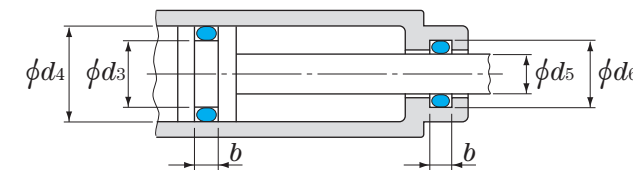


■ Fitting groove design (unit : mm)

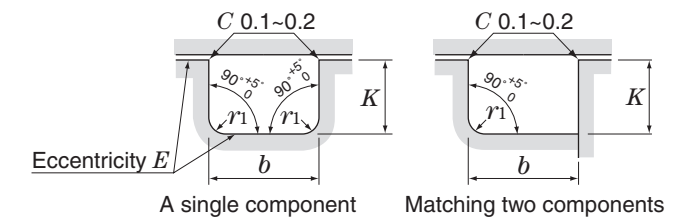

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

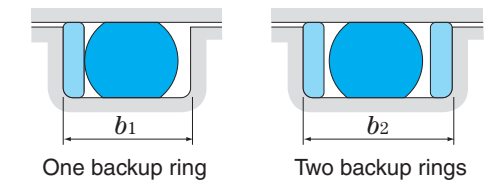

unit : mm


d2 2.4

O-ring dimensions		O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface											
Bore dia. d_1			Cross section dia. d_2	d_8 ¹⁾ (for external pressure)	d_7 ¹⁾ (for internal pressure)	b + 0.25 0	h ± 0.05			r_1 max.	d_3	d_5	Tolerances of d_3 and d_5	d_4	d_6	Tolerances of d_4 and d_6	b +0.25 0 Without backup ring	b_1 +0.25 0 With one backup ring	b_2 +0.25 0 With two backup rings	E ²⁾ max.	r_1 max.
9.8 11.0 12.3	Classes 1-A and 2 ± 0.12	2.4 ± 0.07		JASO 2010 JASO 2011 JASO 2012	10 11.2 12.5	14.1 15.3 16.6	3.2	1.8	0.4		JASO 2010 JASO 2011 JASO 2012	10.2 11.4 12.7	0 − 0.06	14 15.2 16.5	13.8 15 16.3	+ 0.06 0	3.2	4.4	6.0	0.05	0.4
13.0 13.8 14.8	Classes 3 and 4-D ± 0.24		JASO 2013 JASO 2014 JASO 2015	13.2 14 15	17.3 18.1 19.1	JASO 2013 JASO 2014 JASO 2015					13.4 14.2 15.2	13.2 14 15		17.2 18 19	17 17.8 18.8						
15.8 16.8 17.8	Classes 4-C, 4-E and 5 ± 0.36		JASO 2016 JASO 2017 JASO 2018	16 17 18	20.1 21.1 22.1	JASO 2016 JASO 2017 JASO 2018					16.2 17.2 18.2	16 17 18		20 21 22	19.8 20.8 21.8						
18.8 19.8 20.8	Classes 1-A and 2 ± 0.15		JASO 2019 JASO 2020 JASO 2021	19 20 21	23.1 24.1 25.1	JASO 2019 JASO 2020 JASO 2021					19.2 20.2 21.2	19 20 21		23 24 25	22.8 23.8 24.8						
22.1 23.3 24.7			JASO 2022 JASO 2023 JASO 2025	22.4 23.6 25	26.4 27.6 29	JASO 2022 JASO 2023 JASO 2025					22.6 23.8 25.2	22.4 23.6 25	26.4 27.6 29	26.2 27.4 28.8							
26.2 27.7 29.7			Classes 3 and 4-D ± 0.30	JASO 2026 JASO 2028 JASO 2030	26.5 28 30	30.5 32 34					JASO 2026 JASO 2028 JASO 2030	26.7 28.2 30.2	26.5 28 30	30.5 32 34	30.3 31.8 33.8						
31.2 33.2 35.2			Classes 4-C, 4-E and 5 ± 0.45	JASO 2031 JASO 2033 JASO 2035	31.5 33.5 35.5	35.5 37.5 39.5					JASO 2031 JASO 2033 JASO 2035	31.7 33.7 35.7	31.5 33.5 35.5	35.5 37.5 39.5	35.3 37.3 39.3						
37.2 39.7	Classes 1-A and 2 ± 0.25		JASO 2037 JASO 2040	37.5 40	41.5 44	JASO 2037 JASO 2040					37.7 40.2	37.5 40	41.5 44	41.3 43.8							
42.2 44.7 47.2			JASO 2042 JASO 2045 JASO 2047	42.5 45 47.5	46.5 49 51.5	JASO 2042 JASO 2045 JASO 2047					42.7 45.2 47.7	42.5 45 47.5	46.5 49 51.5	46.3 48.8 51.3							
49.7 52.6 55.6			Classes 3 and 4-D ± 0.50	JASO 2050 JASO 2053 JASO 2056	50 53 56	54 57 60					JASO 2050 JASO 2053 JASO 2056	50.2 53.2 56.2	50 53 56	54 57 60	53.8 56.8 59.8						
59.6 62.6 66.6			Classes 4-C, 4-E and 5 ± 0.75	JASO 2060 JASO 2063 JASO 2067	60 63 67	64 67 71					JASO 2060 JASO 2063 JASO 2067	60.2 63.2 67.2	60 63 67	64 67 71	63.8 66.8 70.8						
70.6	Classes 1-A and 2 ± 0.40 Classes 3 and 4-D ± 0.80 Classes 4-C, 4-E and 5 ± 1.20		JASO 2071	71	75	JASO 2071					71.2	71	0 − 0.10	75	74.8	+ 0.10 0					


Notes 1) For a static sealing application on a flat surface, design the groove according to dimension d_8 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

2) Eccentricity E means the difference between the maximum value and minimum value of dimension K . The eccentricity can also be defined as double the coaxiality measurement.


■ O-ring shape and dimensions (unit : mm)

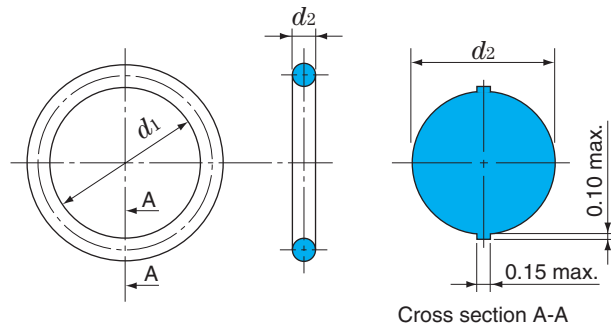


■ Fitting groove dimensions

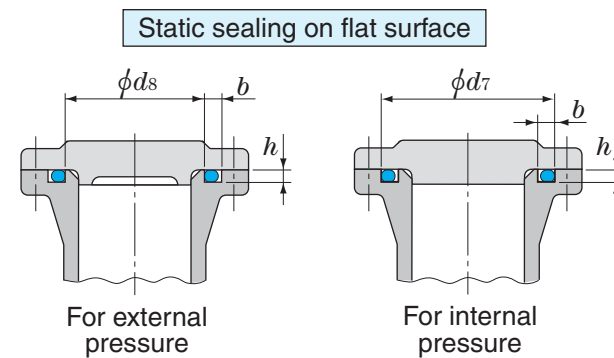


For static sealing on cylindrical surface

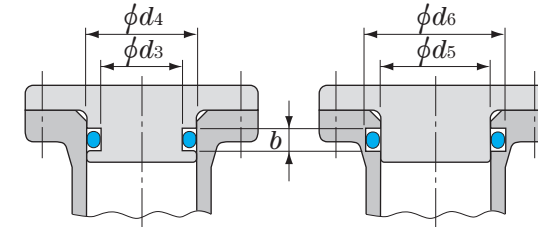

For dynamic sealing

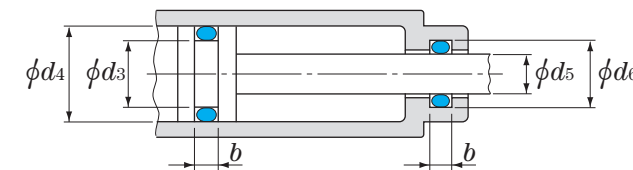


■ Fitting groove design (unit : mm)

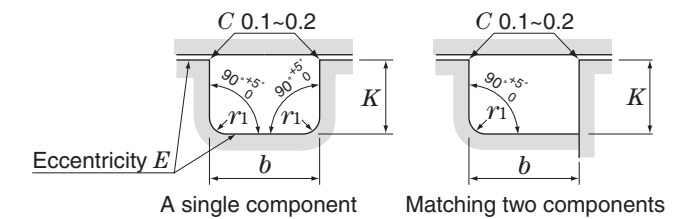

■ Backup rings

(For dynamic sealing and static sealing on cylindrical surface)

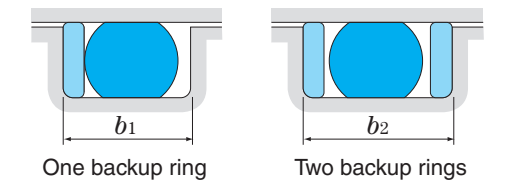

unit : mm

d2 3.5

O-ring dimensions		O-ring No.	Groove dimensions for static sealing on flat surface						O-ring No.	Groove dimensions for dynamic sealing and static sealing on cylindrical surface										
Bore dia. d_1	Cross section dia. d_2		$d_s^{1)}$ (for external pressure)	$d_i^{1)}$ (for internal pressure)	$b^{+0.25}_0$	$h \pm 0.05$	r_1 max.			d_3	d_5	Tolerances of d_3 and d_5	d_4	d_6	Tolerances of d_4 and d_6	$b^{+0.25}_0$ Without backup ring	$b_1^{+0.25}_0$ With one backup ring	$b_2^{+0.25}_0$ With two backup rings	$E^{2)}$ max.	r_1 max.
22.1 23.7 24.7	Classes 1-A and 2 ± 0.15	JASO 3022	22.4	28.4	4.7	2.7	0.7		JASO 3022	22.7	22.4	0 − 0.08	28.4	28.1	+ 0.08 0	4.7	6.0	7.8	0.08	0.7
25.7		JASO 3024	24	30					JASO 3024	24.3	24		30	29.7						
27.7		JASO 3025	25	31					JASO 3025	25.3	25		31	30.7						
29.7	Classes 3 and 4-D ± 0.30	JASO 3026	26	32					JASO 3026	26.3	26		32	31.7						
31.2		JASO 3028	28	34					JASO 3028	28.3	28		34	33.7						
33.7		JASO 3030	30	36					JASO 3030	30.3	30		36	35.7						
35.2	Classes 4-C, 4-E and 5 ± 0.45	JASO 3031	31.5	37.5					JASO 3031	31.8	31.5		37.5	37.2						
37.7		JASO 3034	34	40					JASO 3034	34.3	34		40	39.7						
38.7		JASO 3035	35.5	41.5					JASO 3035	35.8	35.5		41.5	41.2						
39.7		JASO 3038	38	44					JASO 3038	38.3	38		44	43.7						
41.7		JASO 3039	39	45					JASO 3039	39.3	39		45	44.7						
43.7		JASO 3040	40	46					JASO 3040	40.3	40		46	45.7						
44.7	Classes 1-A and 2 ± 0.25	JASO 3042	42	48					JASO 3042	42.3	42	48	47.7							
47.7		JASO 3044	44	50					JASO 3044	44.3	44	50	49.7							
49.7		JASO 3045	45	51					JASO 3045	45.3	45	51	50.7							
52.6	Classes 3 and 4-D ± 0.50	JASO 3048	48	54					JASO 3048	48.3	48	54	53.7							
55.6		JASO 3050	50	56					JASO 3050	50.3	50	56	55.7							
59.6		JASO 3053	53	59					JASO 3053	53.3	53	59	58.7							
62.6	Classes 4-C, 4-E and 5 ± 0.75	JASO 3056	56	62					JASO 3056	56.3	56	62	61.7							
66.6		JASO 3060	60	66					JASO 3060	60.3	60	66	65.7							
70.6		JASO 3063	63	69					JASO 3063	63.3	63	69	68.7							
74.6	Classes 1-A and 2 ± 0.40	JASO 3067	67	73					JASO 3067	67.3	67	73	72.7							
79.6		JASO 3071	71	77					JASO 3071	71.3	71	77	76.7							
84.6		JASO 3075	75	81					JASO 3075	75.3	75	81	80.7							
89.6	Classes 3 and 4-D ± 0.80	JASO 3080	80	86					JASO 3080	80.3	80	86	85.7							
94.6		JASO 3085	85	91					JASO 3085	85.3	85	91	90.7							
99.6		JASO 3090	90	96					JASO 3090	90.3	90	96	95.7							
105.6	Classes 4-C, 4-E and 5 ± 1.20	JASO 3095	95	101					JASO 3095	95.3	95	101	100.7							
111.6		JASO 3100	100	106					JASO 3100	100.3	100	106	105.7							
117.6		JASO 3106	106	112					JASO 3106	106.3	106	112	111.7							
124.6		JASO 3112	112	118					JASO 3112	112.3	112	118	117.7							
131.6		JASO 3118	118	124					JASO 3118	118.3	118	124	123.7							
139.6		JASO 3125	125	131					JASO 3125	125.3	125	131	130.7							
149.6	Classes 1-A and 2 ± 0.60 Classes 3 and 4-D ± 1.20 Classes 4-C, 4-E and 5 ± 1.80	JASO 3132	132	138					JASO 3132	132.3	132	138	137.7							
		JASO 3140	140	146					JASO 3140	140.3	140	146	145.7							
		JASO 3150	150	156					JASO 3150	150.3	150	156	155.7							



Notes 1) For a static sealing application on a flat surface, design the groove according to dimension d_3 for use under external pressure, or according to dimension d_7 for use under internal pressure. An O-ring for use under external pressure can thus have its bore surface in close contact with the inner wall of the groove during use. Likewise an O-ring for use under internal pressure can thus have its circumferential surface in close contact with the outer wall of the groove.

2) Eccentricity E means the difference between the maximum value and minimum value of dimension K . The eccentricity can also be defined as double the coaxiality measurement.

Material : JIS NBR-70-1, NBR-90 and FKM-70

■ Fitting groove dimensions (unit : mm)

■ O-ring shape and dimensions (unit : mm)

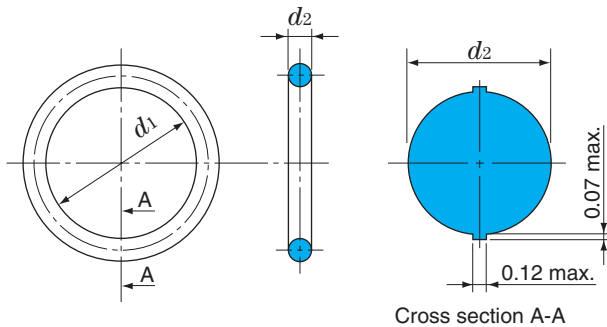

Cross section dia. d_2		Corner radius r_1 max
Over	Up to	
—	3.00	0.4
3.00	6.98	0.8

1) Groove depth K
Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.
Therefore: $K = h - \text{gap in radial}$

d_2 : O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$

d_2 1.02~(1.78)

unit : mm

O-ring dimensions			O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. d_1 ¹⁾			AS 28775A
1.02 ± 0.07	0.74	± 0.10	AS 001	
1.27 ± 0.07	1.07		AS 002	
1.42 ± 0.07	4.70		AS 901	
1.52 ± 0.07	1.42	± 0.10	AS 003	
1.63 ± 0.07	6.07	± 0.12	AS 902	
	7.64		AS 903	
1.78 ± 0.07	1.78	± 0.12	AS 004	
	2.57		AS 005	
	2.90		AS 006	
	3.68		AS 007	
	4.47		AS 008	
	5.28		AS 009	
	6.07			
	7.65			
	9.25			
	10.82			
	12.42			
	14.00		AS 013	
	15.60	AS 014		
	17.17	AS 015		
	18.77	AS 016		
	20.35	AS 017		
	21.95	AS 018		
	23.52	± 0.15	AS 019	
	25.12		AS 020	
	26.70		AS 021	
	28.30		AS 022	
	29.87		AS 023	
	31.47		AS 024	
	33.05	± 0.25	AS 025	
	34.65		AS 026	
	37.82		AS 027	
	41.00		AS 028	
	44.17		AS 029	
	47.35		AS 030	
	50.52	± 0.25	AS 031	
	53.70		AS 032	
	56.87		AS 033	
	60.05		AS 034	
	63.22		AS 035	
		AS 036		
		AS 037		

Note 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1 and NBR-90 products.
For FKM-70 products, consult JTEKT.

d_2 (1.78)~(2.62)



unit : mm

O-ring dimensions			O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$			AS 28775A
1.78 ± 0.07	66.40	± 0.25	AS 038	
	69.57	± 0.38	AS 039	
	72.75		AS 040	
	75.92		AS 041	
	82.27		AS 042	
	88.62		AS 043	
	94.97		AS 044	
	101.32	± 0.58	AS 045	
	107.67		AS 046	
	114.02		AS 047	
	120.37		AS 048	
	126.72	± 0.58	AS 049	
	133.07		AS 050	
1.83 ± 0.07	8.92	± 0.12	AS 904	
	10.52		AS 905	
1.98 ± 0.07	11.89		AS 906	
2.08 ± 0.07	13.46		AS 907	
2.21 ± 0.07	16.36		AS 908	
2.46 ± 0.07	17.93		AS 909	
	19.18		AS 910	
2.62 ± 0.07	1.24	± 0.12	AS 102	
	2.06		AS 103	
	2.84		AS 104	
	3.63		AS 105	
	4.42		AS 106	
	5.23		AS 107	
	6.02		AS 108	
	7.59		AS 109	
	9.19	± 0.15	AS 110	
	10.77		AS 111	
	12.37		AS 112	
	13.94		AS 113	
	15.54		AS 114	
	17.12		AS 115	
	18.72		AS 116	
	20.29	± 0.15	AS 117	
	21.89		AS 118	
	23.47		AS 119	
	25.07		AS 120	
	26.64		AS 121	
	28.24		AS 122	
	29.82		AS 123	
	31.42	± 0.25	AS 124	
	32.99		AS 125	
	34.59		AS 126	
	36.17	± 0.25	AS 127	
	37.77		AS 128	
	39.34		AS 129	
	40.94		AS 130	
	42.52		AS 131	
	44.12		AS 132	
	45.69		AS 133	
	47.29	± 0.25	AS 134	
	48.90		AS 135	
	50.47		AS 136	
	52.07		AS 137	
		53.64		AS 138

Material : JIS NBR-70-1, NBR-90 and FKM-70

■ Fitting groove dimensions (unit : mm)

■ O-ring shape and dimensions (unit : mm)

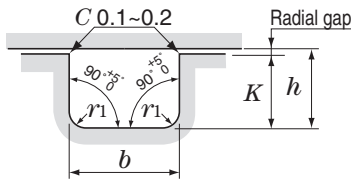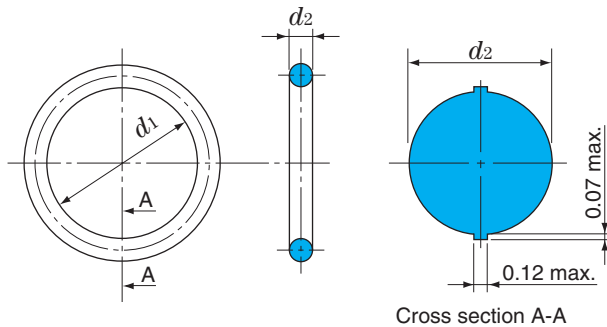

Cross section dia. d_2		Corner radius r_1 max
Over	Up to	
—	3.00	0.4
3.00	6.98	0.8

1) Groove depth K
Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.
Therefore: $K = h - \text{gap in radial}$

d_2 : O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$

unit : mm

d_2 (2.62)

O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
2.62 ± 0.07	± 0.25	AS 139	AS 28775A
		AS 140	
		AS 141	
		AS 142	
		AS 143	
		AS 144	
	± 0.38	AS 145	
		AS 146	
		AS 147	
		AS 148	
		AS 149	
		AS 150	
		AS 151	
		AS 152	
		AS 153	
		AS 154	
		AS 155	
	± 0.58	AS 156	
		AS 157	
		AS 158	
		AS 159	
		AS 160	
		AS 161	
		AS 162	
		AS 163	
		AS 164	
		AS 165	
	± 0.76	AS 166	
		AS 167	
		AS 168	
		AS 169	
		AS 170	
		AS 171	
		AS 172	
		AS 173	
		AS 174	
		AS 175	
		AS 176	
		AS 177	
		AS 178	

Note 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1 and NBR-90 products.
For FKM-70 products, consult JTEKT.


d_2 2.95~(3.53)

unit : mm

O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
2.95 ± 0.10	± 0.12	AS 911	AS 28775A
		AS 912	
	± 0.15	AS 913	
		AS 914	
		AS 916	
3.00 ± 0.10	± 0.25	AS 918	
		AS 920	
		AS 924	
		AS 928	
		AS 932	
3.53 ± 0.10	± 0.12	AS 201	
		AS 202	
		AS 203	
		AS 204	
		AS 205	
		AS 206	
	± 0.15	AS 207	
		AS 208	
		AS 209	
		AS 210	
		AS 211	
		AS 212	
		AS 213	
		AS 214	
		AS 215	
		AS 216	
	± 0.25	AS 217	
		AS 218	
		AS 219	
		AS 220	
		AS 221	
		AS 222	
		AS 223	223
		AS 224	224
		AS 225	225
		AS 226	226
	± 0.38	AS 227	227
		AS 228	228
		AS 229	229
		AS 230	230
		AS 231	231
		AS 232	232
		AS 233	233
		AS 234	234
		AS 235	235
		AS 236	236
		AS 237	237
		AS 238	238
		AS 239	239
		AS 240	240
		AS 241	241
		AS 242	242
		AS 243	243
		AS 244	244
		AS 245	245
		AS 246	246
		AS 247	247

Material : JIS NBR-70-1, NBR-90 and FKM-70

■ Fitting groove dimensions (unit : mm)

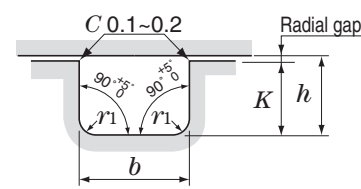

Cross section dia. d_2		Corner radius r_1 max
Over	Up to	
—	3.00	0.4
3.00	6.98	0.8

1) Groove depth K
Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.
Therefore: $K = h - \text{gap in radial}$


d_2 : O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$

■ O-ring shape and dimensions (unit : mm)

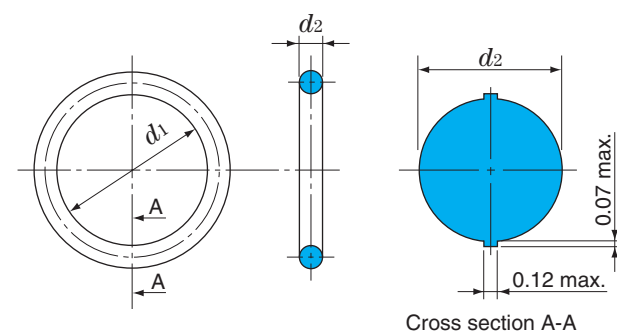

d_2 (3.53)~(5.33)

O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
3.53 ± 0.10	± 0.38	AS 248	248
		AS 249	249
		AS 250	250
	± 0.58	AS 251	251
		AS 252	252
		AS 253	253
		AS 254	254
		AS 255	255
		AS 256	256
	± 0.76	AS 257	257
		AS 258	258
		AS 259	259
		AS 260	260
		AS 261	261
		AS 262	262
		AS 263	263
		AS 264	264
		AS 265	265
		AS 266	266
		AS 267	267
		AS 268	268
	± 1.14	AS 269	269
		AS 270	270
		AS 271	271
		AS 272	272
		AS 273	273
		AS 274	274
		AS 275	
		AS 276	
		AS 277	
		AS 278	
		AS 279	
		AS 280	
		AS 281	
		AS 282	
		AS 283	
		AS 284	
5.33 ± 0.12	± 0.12	AS 309	
		AS 310	
		AS 311	

Note 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1 and NBR-90 products.
For FKM-70 products, consult JTEKT.


d_2 (5.33)

unit : mm

O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
5.33 ± 0.12	± 0.12	AS 312	AS 28775A
		AS 313	
	± 0.15	AS 314	
		AS 315	
		AS 316	
		AS 317	
		AS 318	
		AS 319	
	± 0.25	AS 320	
		AS 321	
		AS 322	
		AS 323	
		AS 324	
		AS 325	
		AS 326	
		AS 327	
		AS 328	
		AS 329	
		AS 330	
	± 0.38	AS 331	
		AS 332	
		AS 333	
		AS 334	
		AS 335	
		AS 336	
		AS 337	
		AS 338	
		AS 339	
		AS 340	
		AS 341	
	± 0.58	AS 342	
		AS 343	
		AS 344	
		AS 345	
		AS 346	
		AS 347	
		AS 348	
		AS 349	
		AS 350	
		AS 351	
		AS 352	
	± 0.76	AS 353	
		AS 354	
		AS 355	
		AS 356	
		AS 357	
		AS 358	
		AS 359	
		AS 360	
		AS 361	
		AS 362	
		AS 363	
		AS 364	
		AS 365	
		AS 366	
		AS 367	
		AS 368	

Material : JIS NBR-70-1, NBR-90 and FKM-70

■ Fitting groove dimensions (unit : mm)



Cross section dia. d_2		Corner radius r_1 max
Over	Up to	
—	3.00	0.4
3.00	6.98	0.8

1) Groove depth K
Determine dimension h to obtain O-ring compression rate between 8 % and 30 %.

$$\text{Compression rate} = \frac{d_2 - h}{d_2} \times 100 (\%) = 8 \% \sim 30 \%$$

Determine the radial gap by the consideration that the double radial gap (gap in diameter) should be less than the value shown in Fig. 2.5.2.

Therefore: $K = h - \text{gap in radial}$


d_2 : O-ring cross section diameter

2) Groove width b

Determine groove width by the consideration that O-ring should not occupy more than 90 % of the groove space.

$$\text{Occupancy percentage} = \frac{\pi \times (d_2/2)^2}{b \times h} \times 100 (\%) < 90 \%$$

■ O-ring shape and dimensions (unit : mm)

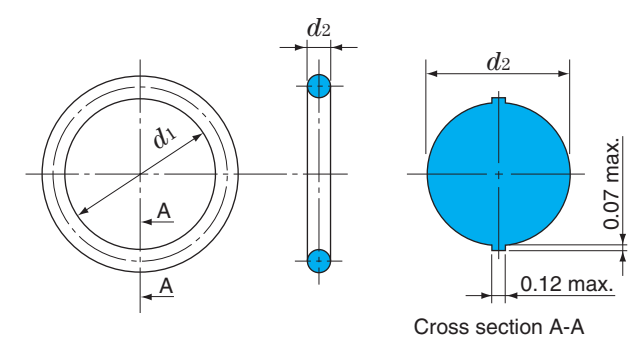

d_2 (5.33)~(6.98)

unit : mm

O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
5.33 ± 0.12	± 0.76	AS 369	AS 28775A
		AS 370	
		AS 371	
		AS 372	
		AS 373	
		AS 374	
		AS 375	
		AS 376	
		AS 377	
		AS 378	
		AS 379	
		AS 380	
	± 1.14	AS 381	
		AS 382	
		AS 383	
		AS 384	
		AS 385	
		AS 386	
	± 1.52	AS 387	
		AS 388	
		AS 389	
		AS 390	
		AS 391	
		AS 392	
6.98 ± 0.15	± 0.38	AS 393	
		AS 394	
		AS 395	
		AS 425	
	± 0.58	AS 426	
		AS 427	
		AS 428	
		AS 429	
	± 0.58	AS 430	
		AS 431	
		AS 432	
		AS 433	
		AS 434	
		AS 435	
		AS 436	
		AS 437	

Note 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1 and NBR-90 products.
For FKM-70 products, consult JTEKT.

d_2 (6.98)

unit : mm


O-ring dimensions		O-ring No.	Reference No.
Cross section dia. d_2	Bore dia. $d_1^{1)}$		
6.98 ± 0.15	± 0.58	AS 438	AS 28775A
		AS 439	
		AS 440	
		AS 441	
	± 0.76	AS 442	
		AS 443	
		AS 444	
		AS 445	
		AS 446	
		AS 447	
		AS 448	
		AS 449	
		AS 450	
		AS 451	
		AS 452	
		AS 453	
		AS 454	
		AS 455	
	± 1.14	AS 456	
		AS 457	
		AS 458	
		AS 459	
		AS 460	
		AS 461	
		AS 462	
		AS 463	
		AS 464	
		AS 465	
	± 1.52	AS 466	
		AS 467	
		AS 468	
		AS 469	
		AS 470	
		AS 471	
		AS 472	
		AS 473	
		AS 474	
		AS 475	

Backup Rings
P 3~165

JIS B 2407 P, G

Koyo

Backup ring shape and dimensions

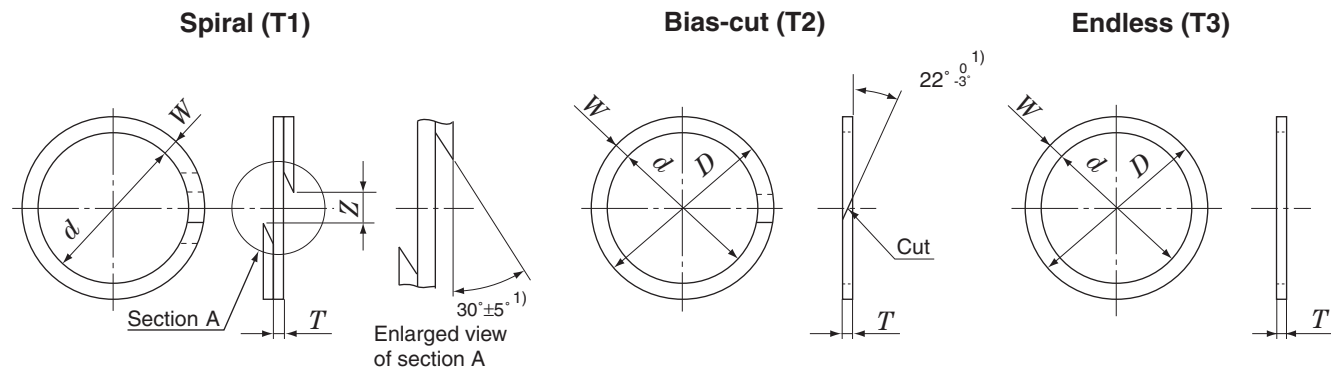

Remark) All rings material is tetrafluoroethylene resin.

P 3~34

unit : mm

Applied O-ring No.	Spiral ring					Bias-cut and Endless ring ²⁾						
	Backup ring No.	Dimensions				Backup ring No.		Dimensions				
		<i>d</i>	<i>W</i> ³⁾	<i>T</i>	<i>Z</i> ⁴⁾	Bias-cut	Endless	<i>d</i>		<i>D</i>		<i>T</i>
P 3	T1 P 3	3	1.5 + 0.03 − 0.06	0.7 ± 0.05	1.2 ± 0.4	T2 P 3	T3 P 3	3	+ 0.15 0	6	0 − 0.15	1.25 ± 0.1
P 4	T1 P 4	4				T2 P 4	T3 P 4	4		7		
P 5	T1 P 5	5				T2 P 5	T3 P 5	5		8		
P 6	T1 P 6	6				T2 P 6	T3 P 6	6		9		
P 7	T1 P 7	7				T2 P 7	T3 P 7	7		10		
P 8	T1 P 8	8				T2 P 8	T3 P 8	8		11		
P 9	T1 P 9	9				T2 P 9	T3 P 9	9		12		
P 10	T1 P 10	10				T2 P 10	T3 P 10	10		13		
P 10A	T1 P 10A	10	2.0 + 0.03 − 0.06	0.7 ± 0.05	1.4 ± 0.8	T2 P 10A	T3 P 10A	10		14		
P 11	T1 P 11	11				T2 P 11	T3 P 11	11		15		
P 11.2	T1 P 11.2	11.2				T2 P 11.2	T3 P 11.2	11.2		15.2		
P 12	T1 P 12	12				T2 P 12	T3 P 12	12		16		
P 12.5	T1 P 12.5	12.5				T2 P 12.5	T3 P 12.5	12.5		16.5		
P 14	T1 P 14	14				T2 P 14	T3 P 14	14		18		
P 15	T1 P 15	15				T2 P 15	T3 P 15	15	19			
P 16	T1 P 16	16				T2 P 16	T3 P 16	16	20			
P 18	T1 P 18	18				T2 P 18	T3 P 18	18	22			
P 20	T1 P 20	20							T2 P 20	T3 P 20	20	24
P 21	T1 P 21	21				T2 P 21	T3 P 21	21	25			
P 22	T1 P 22	22				T2 P 22	T3 P 22	22	26			
P 22A	T1 P 22A	22	3.0 + 0.03 − 0.06	0.7 ± 0.05	2.5 ± 1.5	T2 P 22A	T3 P 22A	22	+ 0.20 0	28	0 − 0.20	1.25 ± 0.1
P 22.4	T1 P 22.4	22.4				T2 P 22.4	T3 P 22.4	22.4		28.4		
P 24	T1 P 24	24				T2 P 24	T3 P 24	24		30		
P 25	T1 P 25	25				T2 P 25	T3 P 25	25		31		
P 25.5	T1 P 25.5	25.5				T2 P 25.5	T3 P 25.5	25.5		31.5		
P 26	T1 P 26	26				T2 P 26	T3 P 26	26		32		
P 28	T1 P 28	28				T2 P 28	T3 P 28	28		34		
P 29	T1 P 29	29				T2 P 29	T3 P 29	29		35		
P 29.5	T1 P 29.5	29.5				T2 P 29.5	T3 P 29.5	29.5		35.5		
P 30	T1 P 30	30								T2 P 30		
P 31	T1 P 31	31				T2 P 31	T3 P 31	31		37		
P 31.5	T1 P 31.5	31.5				T2 P 31.5	T3 P 31.5	31.5		37.5		
P 32	T1 P 32	32				T2 P 32	T3 P 32	32		38		
P 34	T1 P 34	34				T2 P 34	T3 P 34	34		40		

- Notes 1) The cut angle for P3 to P10 is 35° ~ 40°.
2) The dimensions shown in the "Bias-cut and Endless ring" column are the dimensions of endless rings.
Bias-cut rings are produced by cutting endless rings.
3) In the case of bias-cut and endless ring, the deviation of ring thickness W (within one piece) shall be 0.05 mm max.
4) The clearance Z is shown when the backup ring is installed on a shaft toleranced to 0 mm / - 0.05 mm.

P 35~165

unit : mm


Applied O-ring No.	Spiral ring					Bias-cut and Endless ring ²⁾						
	Backup ring No.	Dimensions				Backup ring No.		Dimensions				
		<i>d</i>	<i>W</i> ³⁾	<i>T</i>	<i>Z</i> ⁴⁾	Bias-cut	Endless	<i>d</i>		<i>D</i>		<i>T</i>
P 35	T1 P 35	35	3.0 ^{+0.03} _{-0.06}	0.7 ± 0.05	2.5 ± 1.5	T2 P 35	T3 P 35	35	+ 0.20 0	41	0 -0.20	1.25 ± 0.1
P 35.5	T1 P 35.5	35.5				T2 P 35.5	T3 P 35.5	35.5		41.5		
P 36	T1 P 36	36				T2 P 36	T3 P 36	36		42		
P 38	T1 P 38	38				T2 P 38	T3 P 38	38		44		
P 39	T1 P 39	39				T2 P 39	T3 P 39	39		45		
P 40	T1 P 40	40				T2 P 40	T3 P 40	40		46		
P 41	T1 P 41	41				T2 P 41	T3 P 41	41		47		
P 42	T1 P 42	42				T2 P 42	T3 P 42	42		48		
P 44	T1 P 44	44				T2 P 44	T3 P 44	44		50		
P 45	T1 P 45	45				T2 P 45	T3 P 45	45		51		
P 46	T1 P 46	46				T2 P 46	T3 P 46	46		52		
P 48	T1 P 48	48				T2 P 48	T3 P 48	48		54		
P 49	T1 P 49	49	5.0 ^{+0.03} _{-0.06}	0.9 ± 0.06	4.5 ± 1.5	T2 P 49	T3 P 49	49	+ 0.25 0	55	0 -0.25	1.9 ± 0.13
P 50	T1 P 50	50				T2 P 50	T3 P 50	50		56		
P 48A	T1 P 48A	48				T2 P 48A	T3 P 48A	48		58		
P 50A	T1 P 50A	50				T2 P 50A	T3 P 50A	50		60		
P 52	T1 P 52	52				T2 P 52	T3 P 52	52		62		
P 53	T1 P 53	53				T2 P 53	T3 P 53	53		63		
P 55	T1 P 55	55				T2 P 55	T3 P 55	55		65		
P 56	T1 P 56	56				T2 P 56	T3 P 56	56		66		
P 58	T1 P 58	58				T2 P 58	T3 P 58	58		68		
P 60	T1 P 60	60				T2 P 60	T3 P 60	60		70		
P 62	T1 P 62	62				T2 P 62	T3 P 62	62		72		
P 63	T1 P 63	63				T2 P 63	T3 P 63	63		73		
P 65	T1 P 65	65				T2 P 65	T3 P 65	65		75		
P 67	T1 P 67	67				T2 P 67	T3 P 67	67		77		
P 70	T1 P 70	70	7.5 ^{+0.03} _{-0.06}	1.4 ± 0.08	6.0 ± 2.0	T2 P 70	T3 P 70	70	+ 0.30 0	80	0 -0.30	2.75 ± 0.15
P 71	T1 P 71	71				T2 P 71	T3 P 71	71		81		
P 75	T1 P 75	75				T2 P 75	T3 P 75	75		85		
P 80	T1 P 80	80				T2 P 80	T3 P 80	80		90		
P 85	T1 P 85	85				T2 P 85	T3 P 85	85		95		
P 90	T1 P 90	90				T2 P 90	T3 P 90	90		100		
P 95	T1 P 95	95				T2 P 95	T3 P 95	95		105		
P 100	T1 P 100	100				T2 P 100	T3 P 100	100		110		
P 102	T1 P 102	102				T2 P 102	T3 P 102	102		112		
P 105	T1 P 105	105				T2 P 105	T3 P 105	105		115		
P 110	T1 P 110	110				T2 P 110	T3 P 110	110		120		
P 112	T1 P 112	112				T2 P 112	T3 P 112	112		122		
P 115	T1 P 115	115				T2 P 115	T3 P 115	115		125		
P 120	T1 P 120	120				T2 P 120	T3 P 120	120		130		
P 125	T1 P 125	125				T2 P 125	T3 P 125	125		135		
P 130	T1 P 130	130				T2 P 130	T3 P 130	130		140		
P 132	T1 P 132	132				T2 P 132	T3 P 132	132		142		
P 135	T1 P 135	135				T2 P 135	T3 P 135	135		145		
P 140	T1 P 140	140				T2 P 140	T3 P 140	140		150		
P 145	T1 P 145	145				T2 P 145	T3 P 145	145		155		
P 150	T1 P 150	150				T2 P 150	T3 P 150	150		160		
P 150A	T1 P 150A	150				T2 P 150A	T3 P 150A	150		165		
P 155	T1 P 155	155				T2 P 155	T3 P 155	155		170		
P 160	T1 P 160	160	7.5 ^{+0.03} _{-0.06}	1.4 ± 0.08	6.0 ± 2.0	T2 P 160	T3 P 160	160	+ 0.30 0	175	0 -0.30	2.75 ± 0.15
P 165	T1 P 165	165	T2 P 165	T3 P 165	165	180						

Backup Rings
P 170~G 300

JIS B 2401 P, G

Koyo

■ Backup ring shape and dimensions

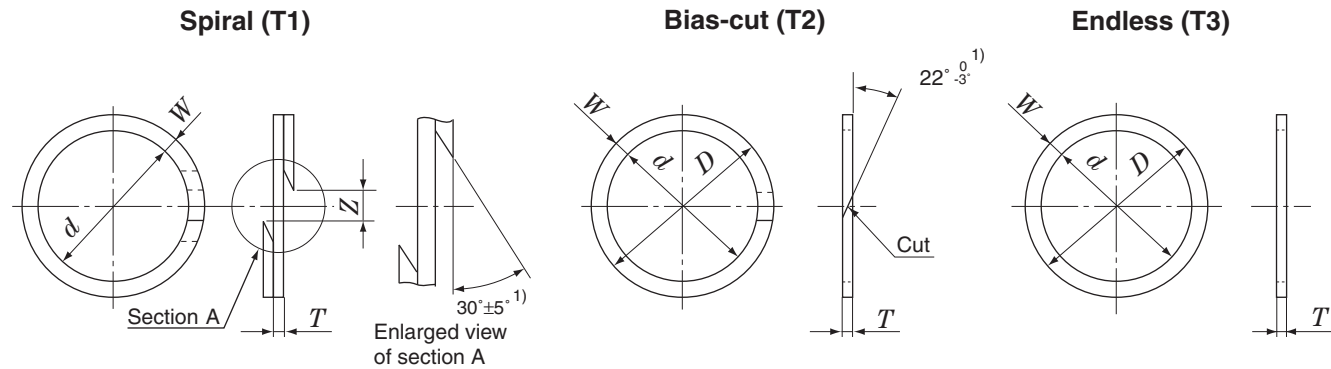

Remark) All rings material is tetrafluoroethylene resin.

P 170~360

unit : mm

Applied O-ring No.	Spiral ring					Bias-cut and Endless ring ²⁾						
	Backup ring No.	Dimensions				Backup ring No.		Dimensions				
		<i>d</i>	<i>W</i> ³⁾	<i>T</i>	<i>Z</i> ⁴⁾	Bias-cut	Endless	<i>d</i>		<i>D</i>		<i>T</i>
P 170	T1 P170	170	7.5 ^{+ 0.03} - 0.06	1.4 ± 0.08	6.0 ± 2.0	T2 P 170	T3 P 170	170	+ 0.30 0	185	0 - 0.30	2.75 ± 0.15
P 175	T1 P175	175				T2 P 175	T3 P 175	175		190		
P 180	T1 P180	180				T2 P 180	T3 P 180	180		195		
P 185	T1 P185	185				T2 P 185	T3 P 185	185		200		
P 190	T1 P190	190				T2 P 190	T3 P 190	190		205		
P 195	T1 P195	195				T2 P 195	T3 P 195	195		210		
P 200	T1 P200	200				T2 P 200	T3 P 200	200		215		
P 205	T1 P205	205				T2 P 205	T3 P 205	205		220		
P 209	T1 P209	209				T2 P 209	T3 P 209	209		224		
P 210	T1 P210	210				T2 P 210	T3 P 210	210		225		
P 215	T1 P215	215				T2 P 215	T3 P 215	215		230		
P 220	T1 P220	220				T2 P 220	T3 P 220	220		235		
P 225	T1 P225	225				T2 P 225	T3 P 225	225		240		
P 230	T1 P230	230				T2 P 230	T3 P 230	230		245		
P 235	T1 P235	235				T2 P 235	T3 P 235	235		250		
P 240	T1 P240	240				T2 P 240	T3 P 240	240		255		
P 245	T1 P245	245				T2 P 245	T3 P 245	245		260		
P 250	T1 P250	250				T2 P 250	T3 P 250	250		265		
P 255	T1 P255	255				T2 P 255	T3 P 255	255		270		
P 260	T1 P260	260				T2 P 260	T3 P 260	260		275		
P 265	T1 P265	265				T2 P 265	T3 P 265	265		280		
P 270	T1 P270	270				T2 P 270	T3 P 270	270		285		
P 275	T1 P275	275				T2 P 275	T3 P 275	275		290		
P 280	T1 P280	280				T2 P 280	T3 P 280	280		295		
P 285	T1 P285	285				T2 P 285	T3 P 285	285		300		
P 290	T1 P290	290				T2 P 290	T3 P 290	290		305		
P 295	T1 P295	295				T2 P 295	T3 P 295	295		310		
P 300	T1 P300	300				T2 P 300	T3 P 300	300		315		
P 315	T1 P315	315				T2 P 315	T3 P 315	315		330		
P 320	T1 P320	320				T2 P 320	T3 P 320	320		335		
P 335	T1 P335	335				T2 P 335	T3 P 335	335		350		
P 340	T1 P340	340				T2 P 340	T3 P 340	340		355		
P 355	T1 P355	355				T2 P 355	T3 P 355	355		370		
P 360	T1 P360	360				T2 P 360	T3 P 360	360		375		

- Notes 1) The cut angle for P3 to P10 is 35°~ 40°.
2) The dimensions shown in the "Bias-cut and Endless ring" column are the dimensions of endless rings.
Bias-cut rings are produced by cutting endless rings.
3) In the case of bias-cut and endless ring, the deviation of ring thickness W (within one piece) shall be 0.05 mm max.
4) The clearance Z is shown when the backup ring is installed on a shaft toleranced to 0 mm / - 0.05 mm.

P 375~400
G 25~300

unit : mm

Applied O-ring No.	Spiral ring					Bias-cut and Endless ring ²⁾									
	Backup ring No.	Dimensions				Backup ring No.		Dimensions							
		<i>d</i>	<i>W</i> ³⁾	<i>T</i>	<i>Z</i> ⁴⁾	Bias-cut	Endless	<i>d</i>		<i>D</i>		<i>T</i>			
P 375 P 385 P 400	T1 P 375 T1 P 385 T1 P 400	375 385 400	7.5 ^{+0.03} _{-0.06}	1.4 ± 0.08	6.0 ± 2.0	T2 P 375 T2 P 385 T2 P 400	T3 P 375 T3 P 385 T3 P 400	375 385 400	+ 0.30 0	390 400 415	0 -0.30	2.75 ± 0.15			
G 25 G 30 G 35	T1 G 25 T1 G 30 T1 G 35	25 30 35				T2 G 25 T2 G 30 T2 G 35	T3 G 25 T3 G 30 T3 G 35	25 30 35		+ 0.20 0			30 35 40	0 -0.20	1.25 ± 0.1
G 40 G 45 G 50	T1 G 40 T1 G 45 T1 G 50	40 45 50											T2 G 40 T2 G 45 T2 G 50		
G 55 G 60 G 65	T1 G 55 T1 G 60 T1 G 65	55 60 65	T2 G 55 T2 G 60 T2 G 65	T3 G 55 T3 G 60 T3 G 65	55 60 65				60 65 70		0 -0.25	1.25 ± 0.1			
G 70 G 75 G 80	T1 G 70 T1 G 75 T1 G 80	70 75 80				T2 G 70 T2 G 75 T2 G 80	T3 G 70 T3 G 75 T3 G 80	70 75 80		75 80 85					
G 85 G 90 G 95	T1 G 85 T1 G 90 T1 G 95	85 90 95											T2 G 85 T2 G 90 T2 G 95	T3 G 85 T3 G 90 T3 G 95	85 90 95
G 100 G 105 G 110	T1 G 100 T1 G 105 T1 G 110	100 105 110	T2 G 100 T2 G 105 T2 G 110	T3 G 100 T3 G 105 T3 G 110	100 105 110				105 110 115						
G 115 G 120 G 125	T1 G 115 T1 G 120 T1 G 125	115 120 125				T2 G 115 T2 G 120 T2 G 125	T3 G 115 T3 G 120 T3 G 125	115 120 125		120 125 130					
G 130 G 135 G 140 G 145	T1 G 130 T1 G 135 T1 G 140 T1 G 145	130 135 140 145									T2 G 130 T2 G 135 T2 G 140 T2 G 145	T3 G 130 T3 G 135 T3 G 140 T3 G 145	130 135 140 145	135 140 145 150	
G 150 G 155 G 160	T1 G 150 T1 G 155 T1 G 160	150 155 160	T2 G 150 T2 G 155 T2 G 160	T3 G 150 T3 G 155 T3 G 160	150 155 160				160 165 170						
G 165 G 170 G 175	T1 G 165 T1 G 170 T1 G 175	165 170 175				T2 G 165 T2 G 170 T2 G 175	T3 G 165 T3 G 170 T3 G 175	165 170 175		175 180 185					
G 180 G 185 G 190	T1 G 180 T1 G 185 T1 G 190	180 185 190									T2 G 180 T2 G 185 T2 G 190	T3 G 180 T3 G 185 T3 G 190	180 185 190	190 195 200	
G 195 G 200 G 210	T1 G 195 T1 G 200 T1 G 210	195 200 210	T2 G 195 T2 G 200 T2 G 210	T3 G 195 T3 G 200 T3 G 210	195 200 210				205 210 220						
G 220 G 230 G 240	T1 G 220 T1 G 230 T1 G 240	220 230 240				T2 G 220 T2 G 230 T2 G 240	T3 G 220 T3 G 230 T3 G 240	220 230 240		230 240 250					
G 250 G 260 G 270	T1 G 250 T1 G 260 T1 G 270	250 260 270									T2 G 250 T2 G 260 T2 G 270	T3 G 250 T3 G 260 T3 G 270	250 260 270	260 270 280	
G 280 G 290 G 300	T1 G 280 T1 G 290 T1 G 300	280 290 300	T2 G 280 T2 G 290 T2 G 300	T3 G 280 T3 G 290 T3 G 300	280 290 300				290 300 310						

V

15~1 055


JIS B 2401

V (for Vacuum Flanges)


Material : JIS NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90, VMQ-70, FKM-70, FKM-90, HNBR-70, HNBR-90, ACM-70 and SBR-70 (Not standardized in the JIS)

■ O-ring shape and dimensions (unit : mm)

■ Fitting groove dimensions

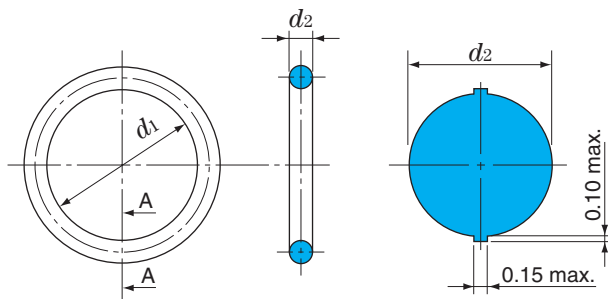

Cross section A-A

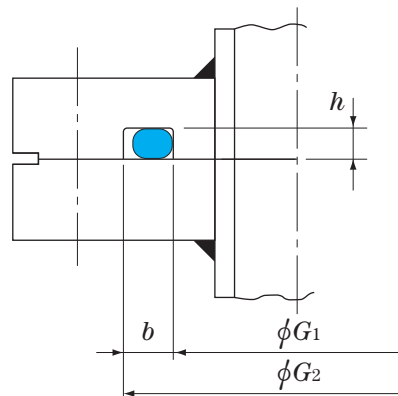

V 15~1 055

unit : mm

O-ring dimensions		O-ring No.	Groove dimensions					
Bore dia. d_1 ¹⁾	Cross section dia. d_2		G_1		G_2	b ^{+0.1} ₀	h ⁰ _{-0.2}	
14.5 ± 0.20	4 ± 0.10	V 15	15	+ 1.0 0	25	5.0	3.0	
23.5 ± 0.24		V 24	24		34			
33.5 ± 0.33		V 34	34		44			
39.5 ± 0.37		V 40	40		50			
54.5 ± 0.49		V 55	55		65			
69.0 ± 0.61		V 70	70		80			
84.0 ± 0.72		V 85	85		95			
99.0 ± 0.83		V 100	100		110			
119.0 ± 0.97		V 120	120		130			
148.5 ± 1.18		V 150	150		160			
173.0 ± 1.36		V 175	175		185			
222.5 ± 1.70	6 ± 0.15	V 225	225	+ 1.5 0	241	8.0	4.5	
272.0 ± 2.02		V 275	275		291			
321.5 ± 2.34		V 325	325		341			
376.0 ± 2.68		V 380	380		396			
425.5 ± 2.99		V 430	430		446			
475.0 ± 3.30	10 ± 0.30	V 480	480	+ 2.0 0	504	12.0	7.0	
524.5 ± 3.60		V 530	530		554			
579.0 ± 3.92		V 585	585		609			
633.5 ± 4.24		V 640	640		664			
683.0 ± 4.54		V 690	690		714			
732.5 ± 4.83		V 740	740	+ 2.0 0	764			
782.0 ± 5.12		V 790	790		814			
836.5 ± 5.44		V 845	845		869			
940.5 ± 6.06		V 950	950		974			
1 044.0 ± 6.67		V 1 055	1 055		1 079			

Note 1) The tolerance of bore diameter d_1 shows the specified values in JIS B 2401 for NBR-70-1, NBR-90, NBR-70-2, EPDM-70, EPDM-90 and SBR-70 (Not standardized in the JIS) products.
For VMQ-70 and ACM-70 products, the tolerance is 1.5 times these values, and for FKM-70, FKM-90, HNBR-70 and HNBR-90 products, 1.2 times.


3

Application Examples of Oil Seals and O-Rings


3.1 Automobile	144
■ Automatic transaxle	
■ Manual transaxle	
■ Engine	
■ Electric power steering	
■ Driving wheel	
■ Driven wheel	
3.2 Motorcycle	147
■ Engine	
3.3 Rolling mill roll necks	148
■ Rolling bearing	
■ Oil-film bearing	
3.4 Rolling stock axles	149
■ Double row tapered roller bearing	
■ Double row cylindrical roller bearing	
3.5 Geared motor	150
3.6 Hydraulic motor	150

3.1 Automobile


Automatic transaxle

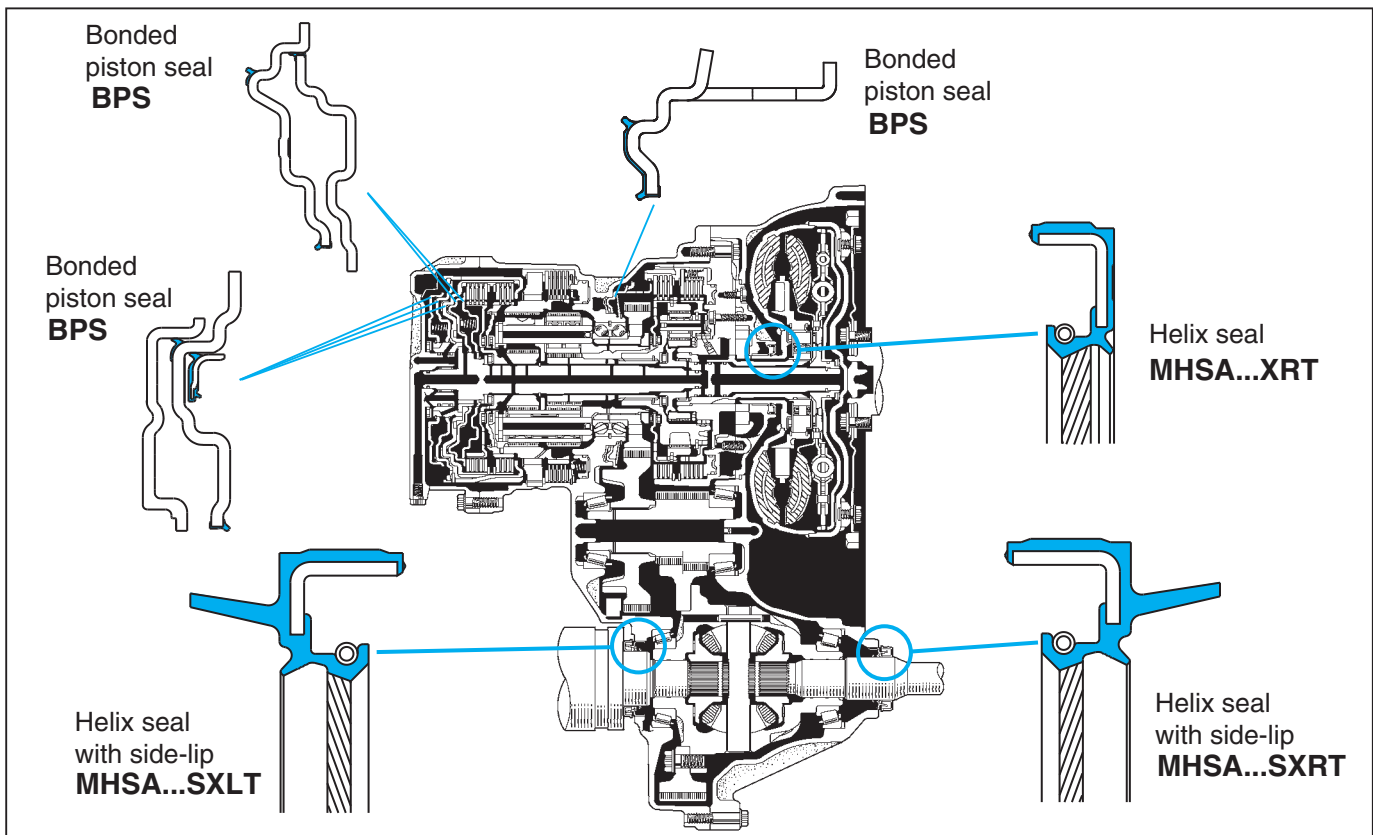


Manual transaxle

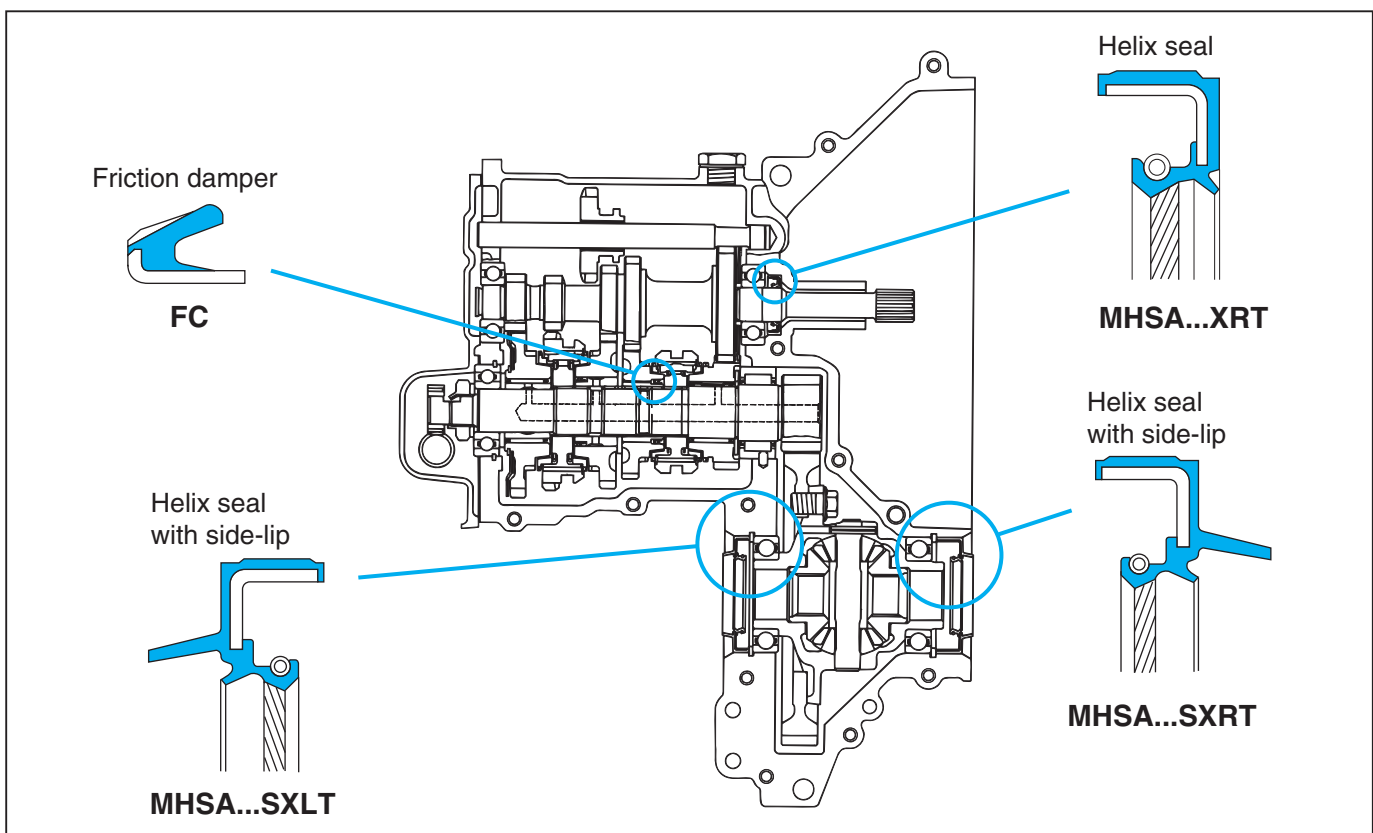


■ Engine

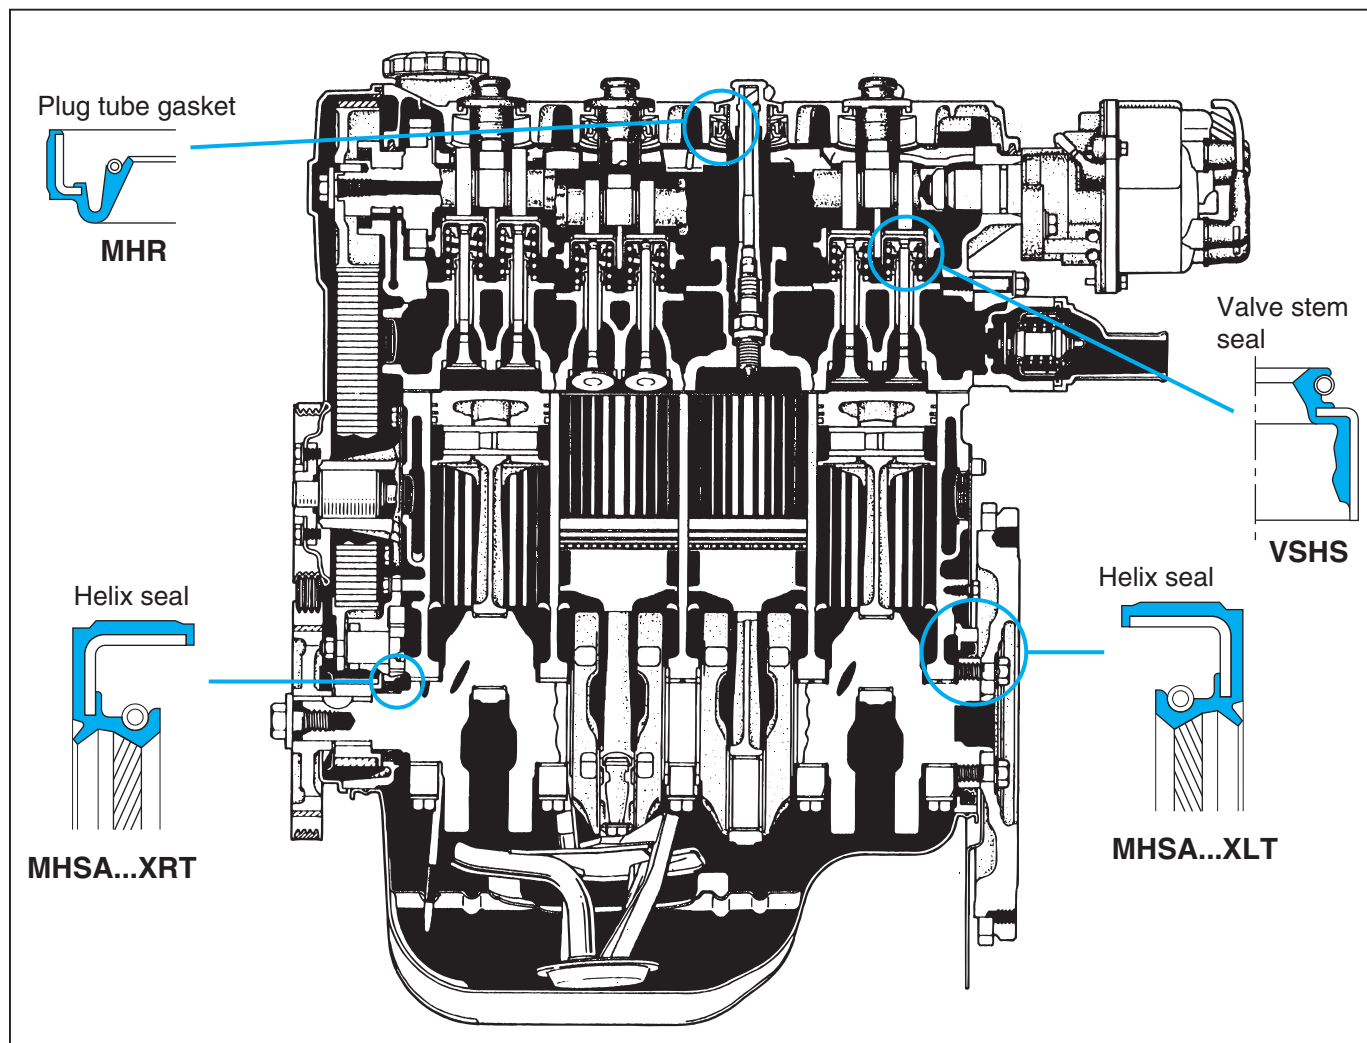


■ Electric power steering

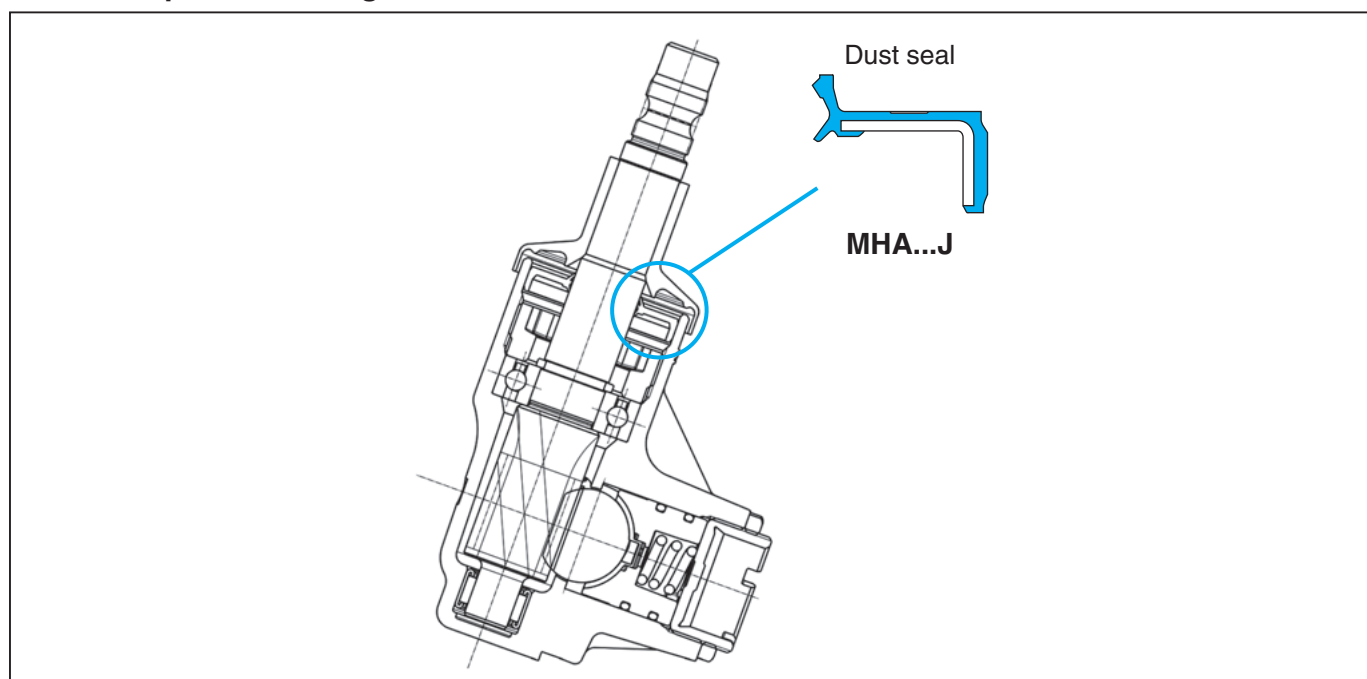

■ Driving wheel

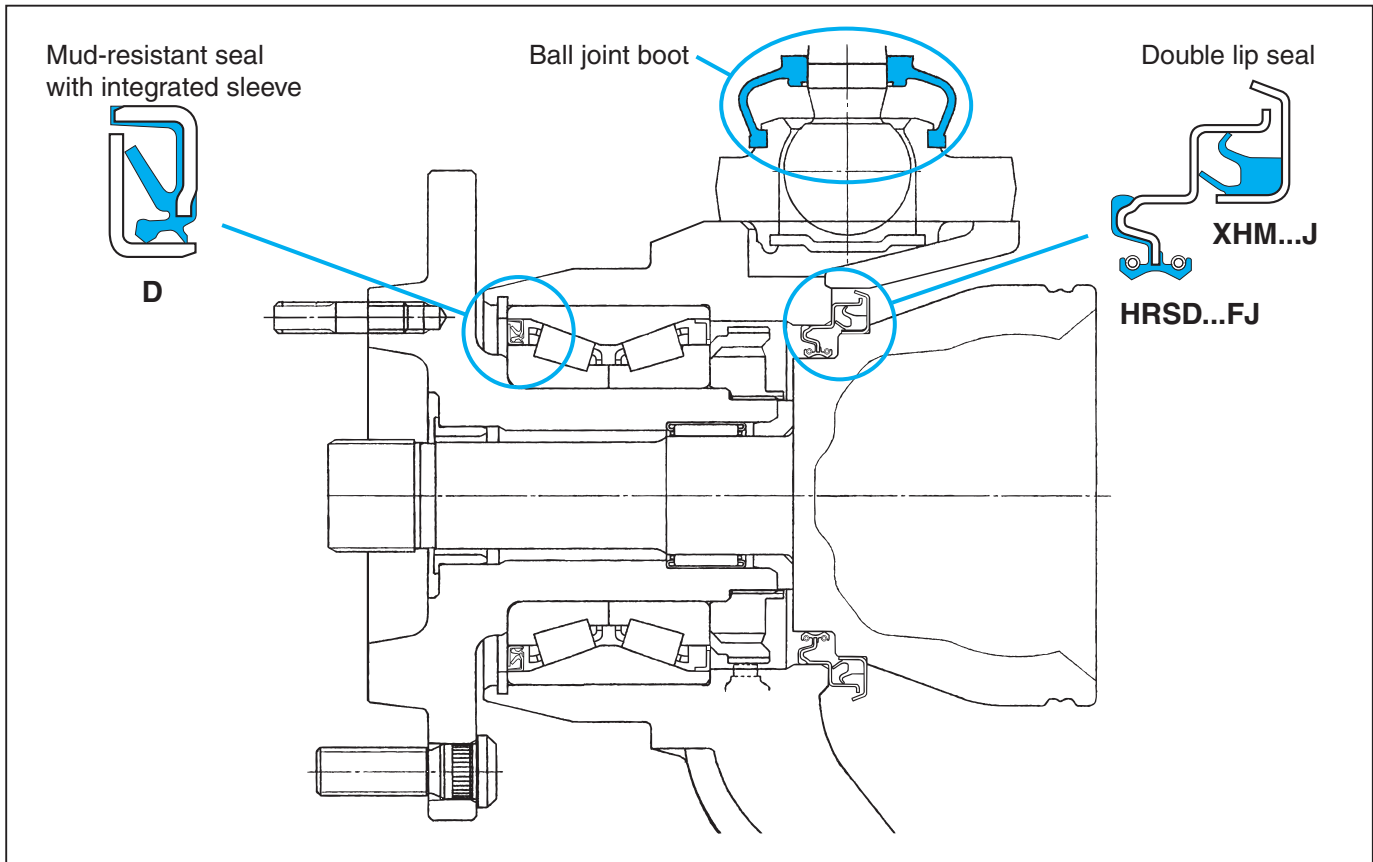


■ Driven wheel

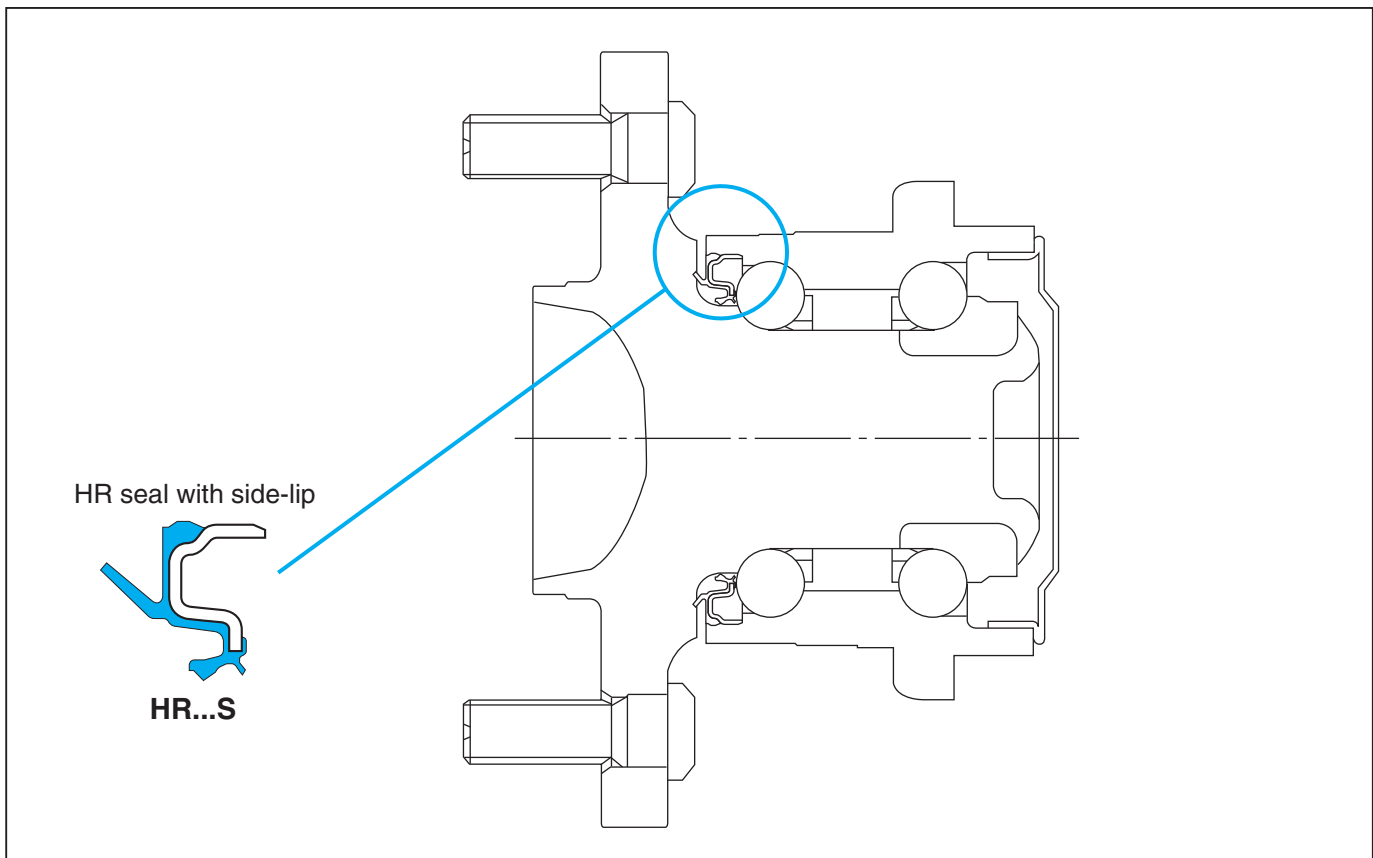


3.2 Motorcycle

■ Engine

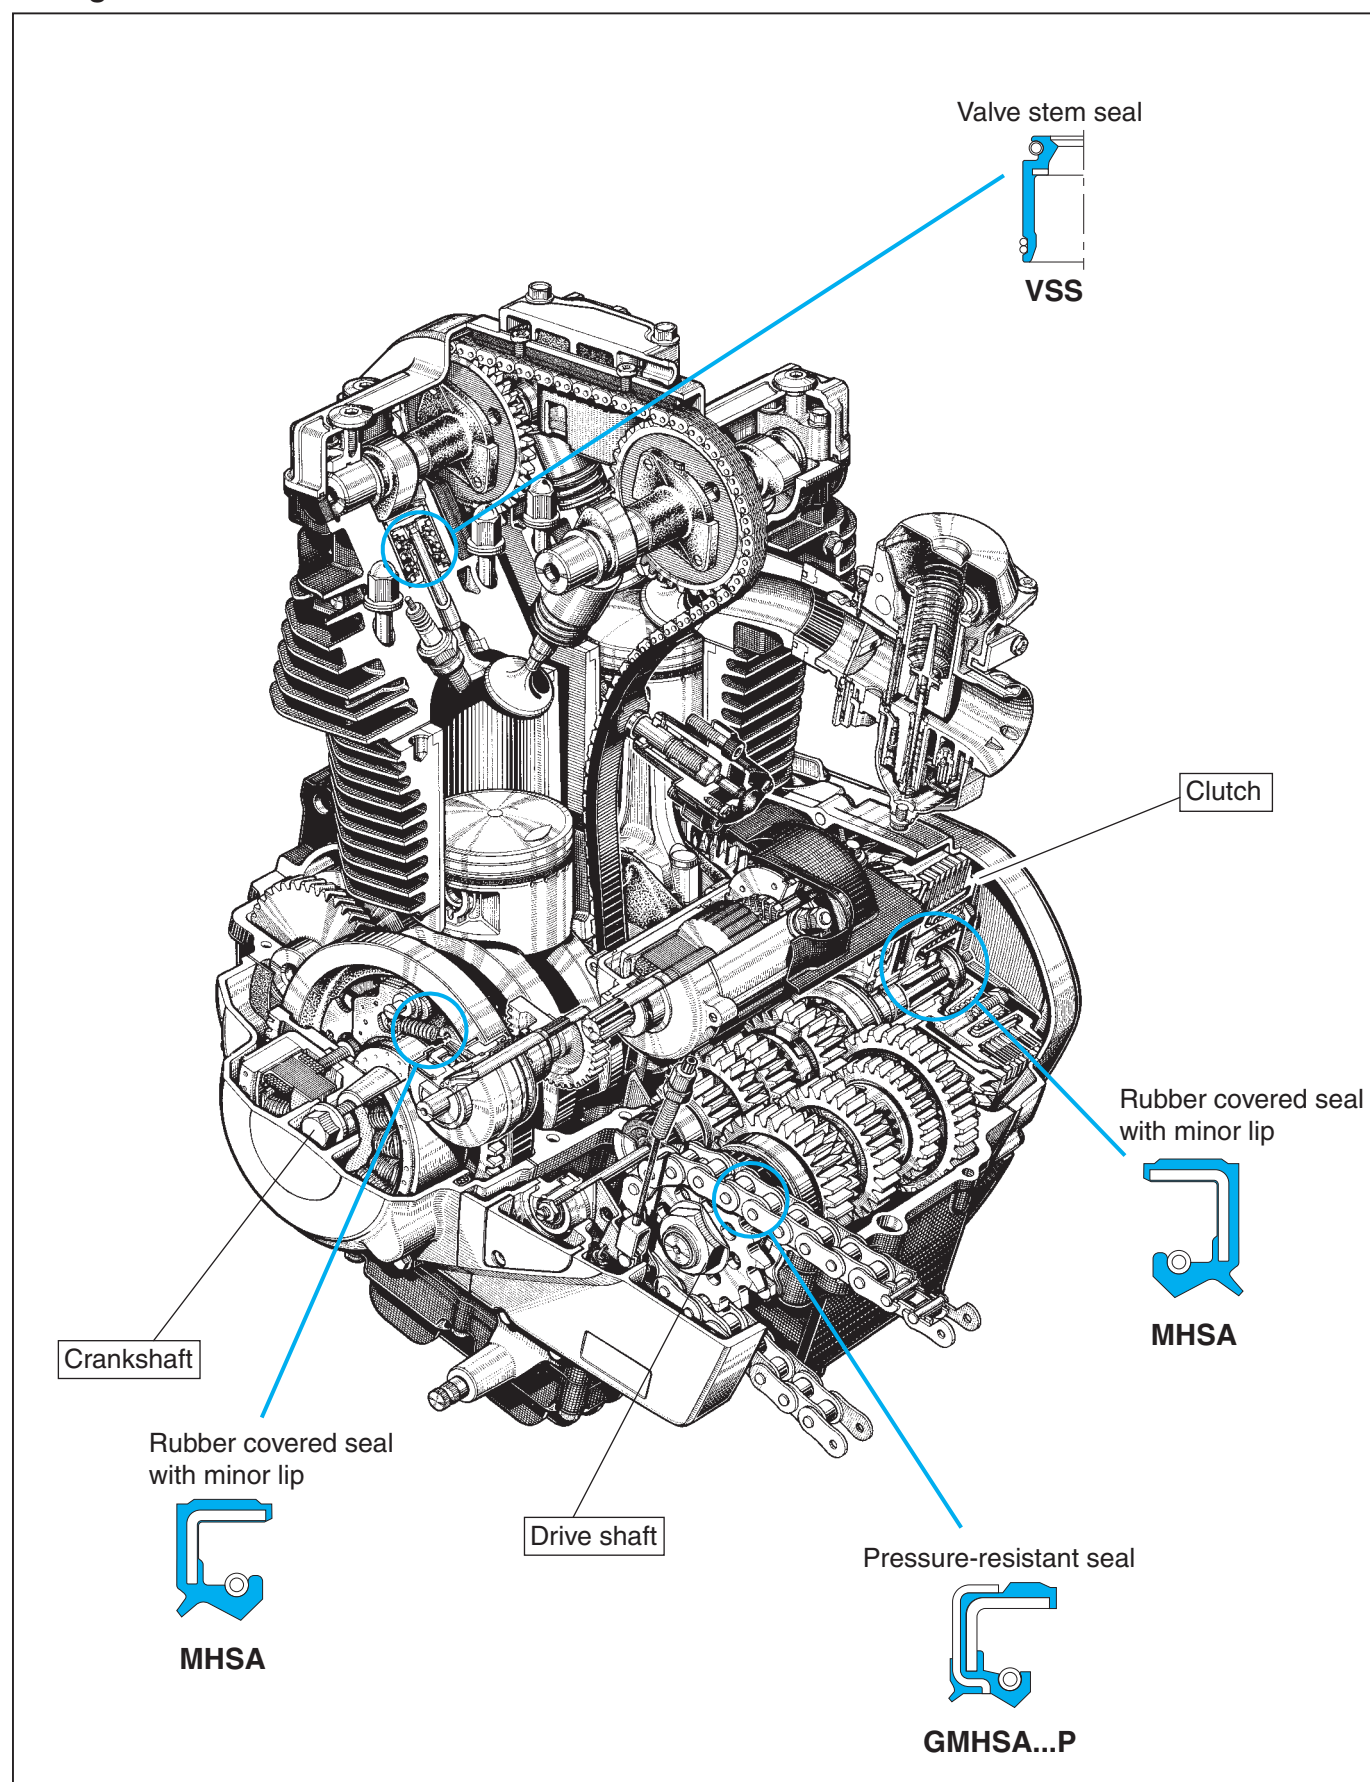


3.3 Rolling mill roll necks

Rolling bearing

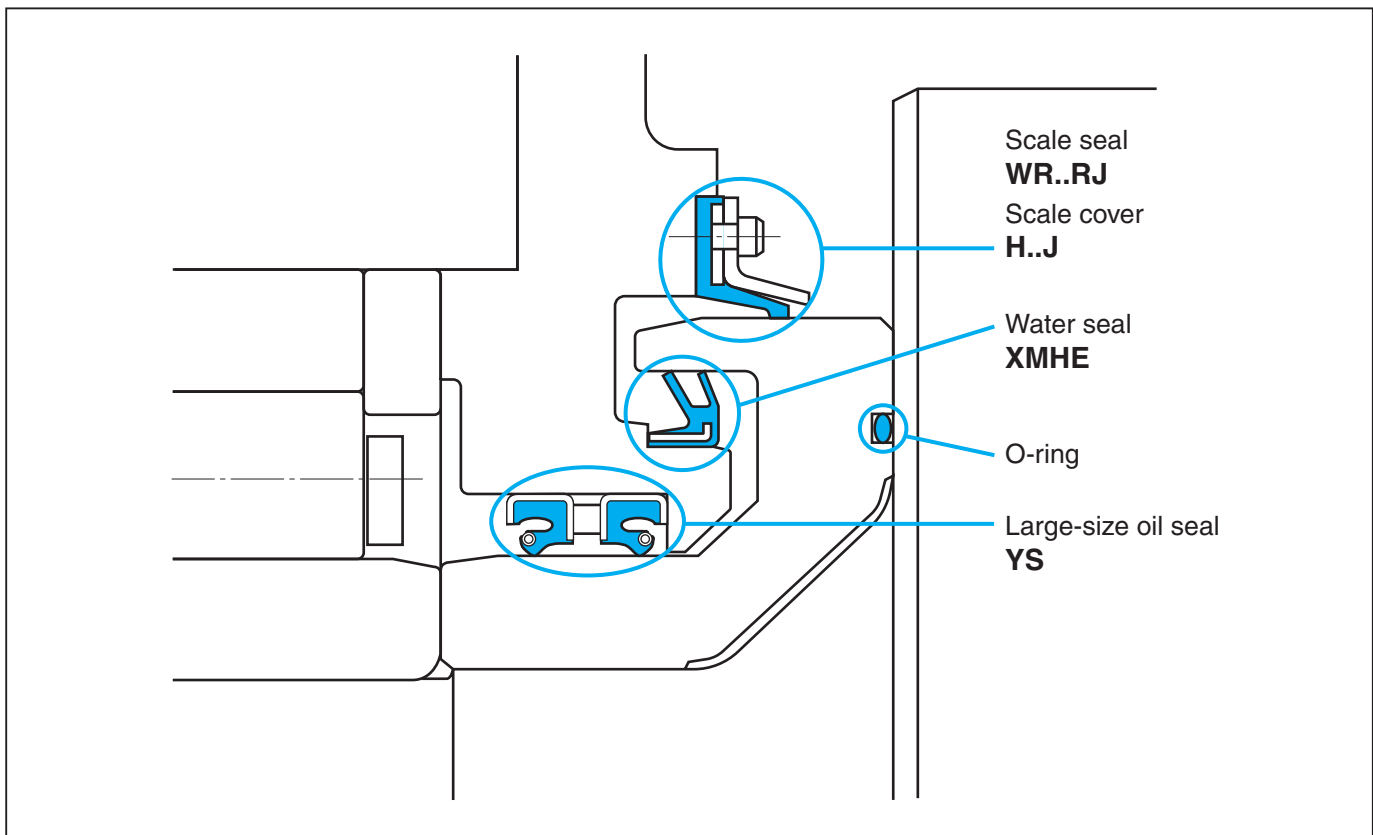


Oil-film bearing

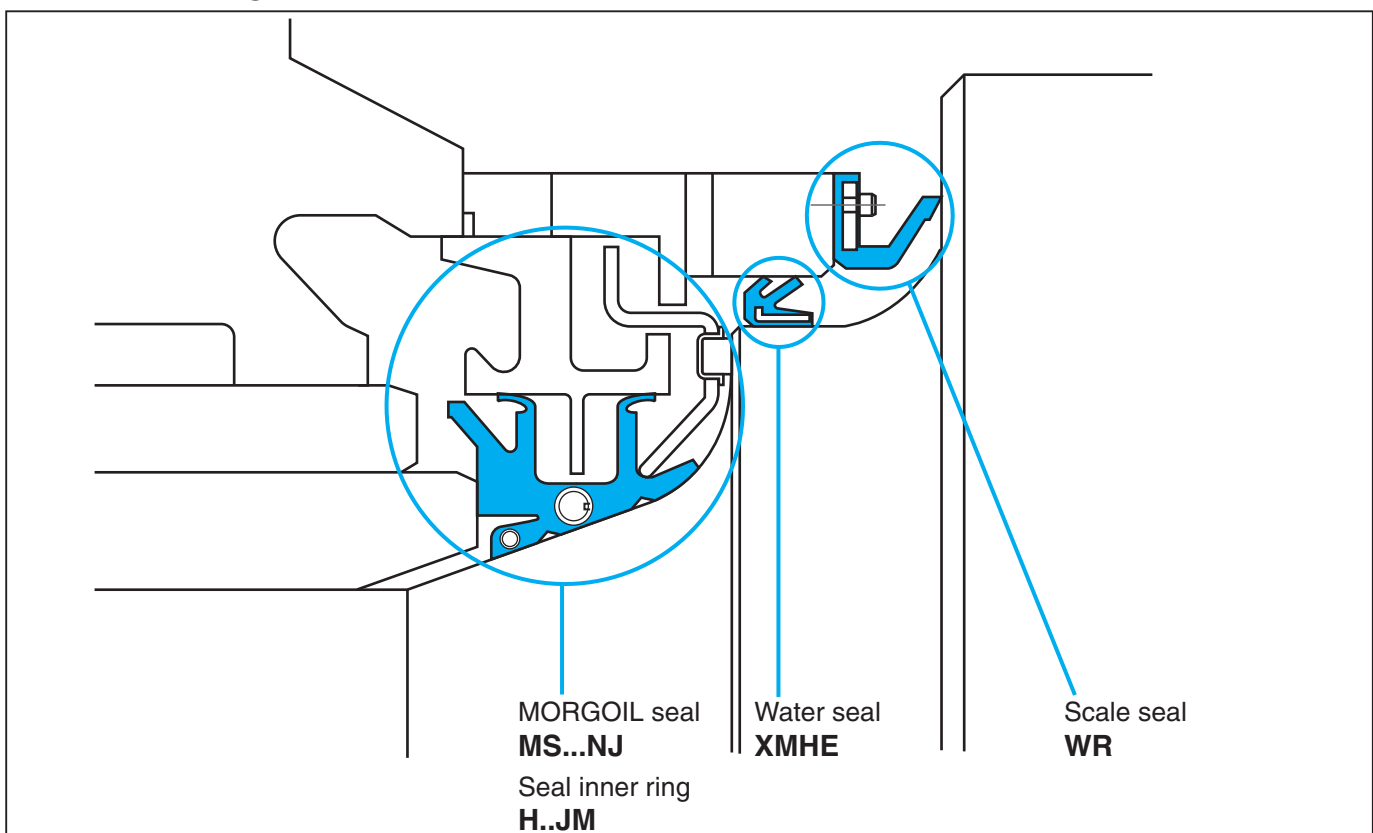


3.4 Rolling stock axles


■ Double row tapered roller bearing

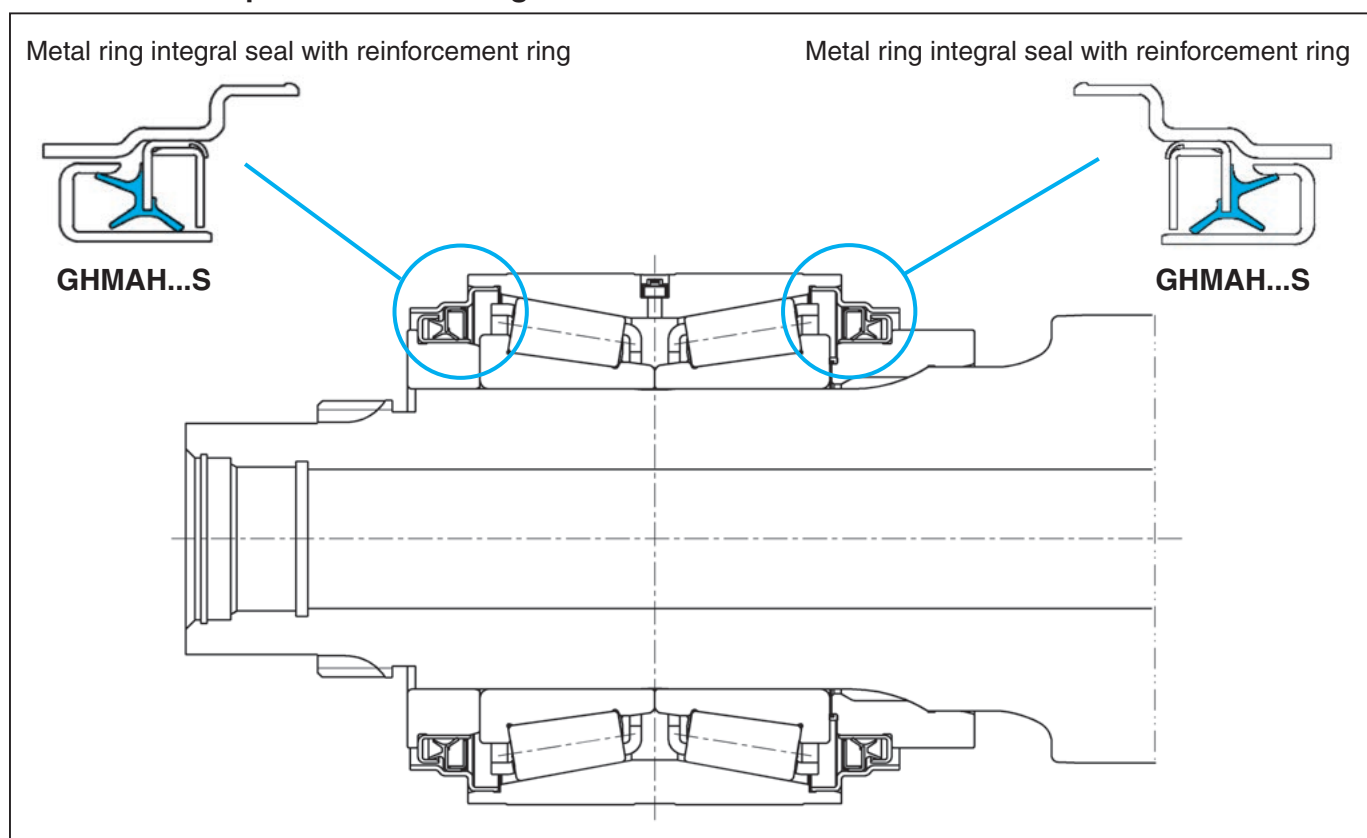


■ Double row cylindrical roller bearing

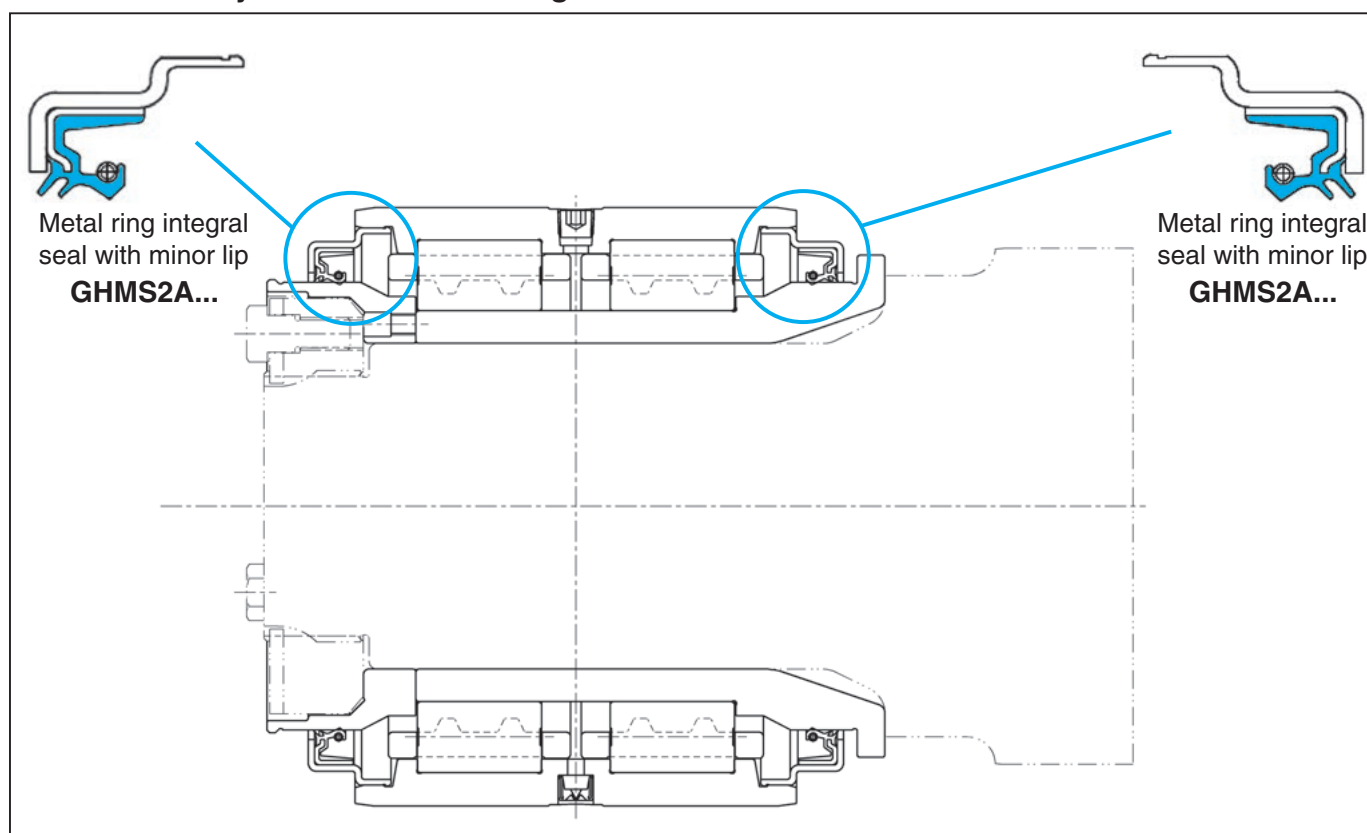

3.5 Geared motor

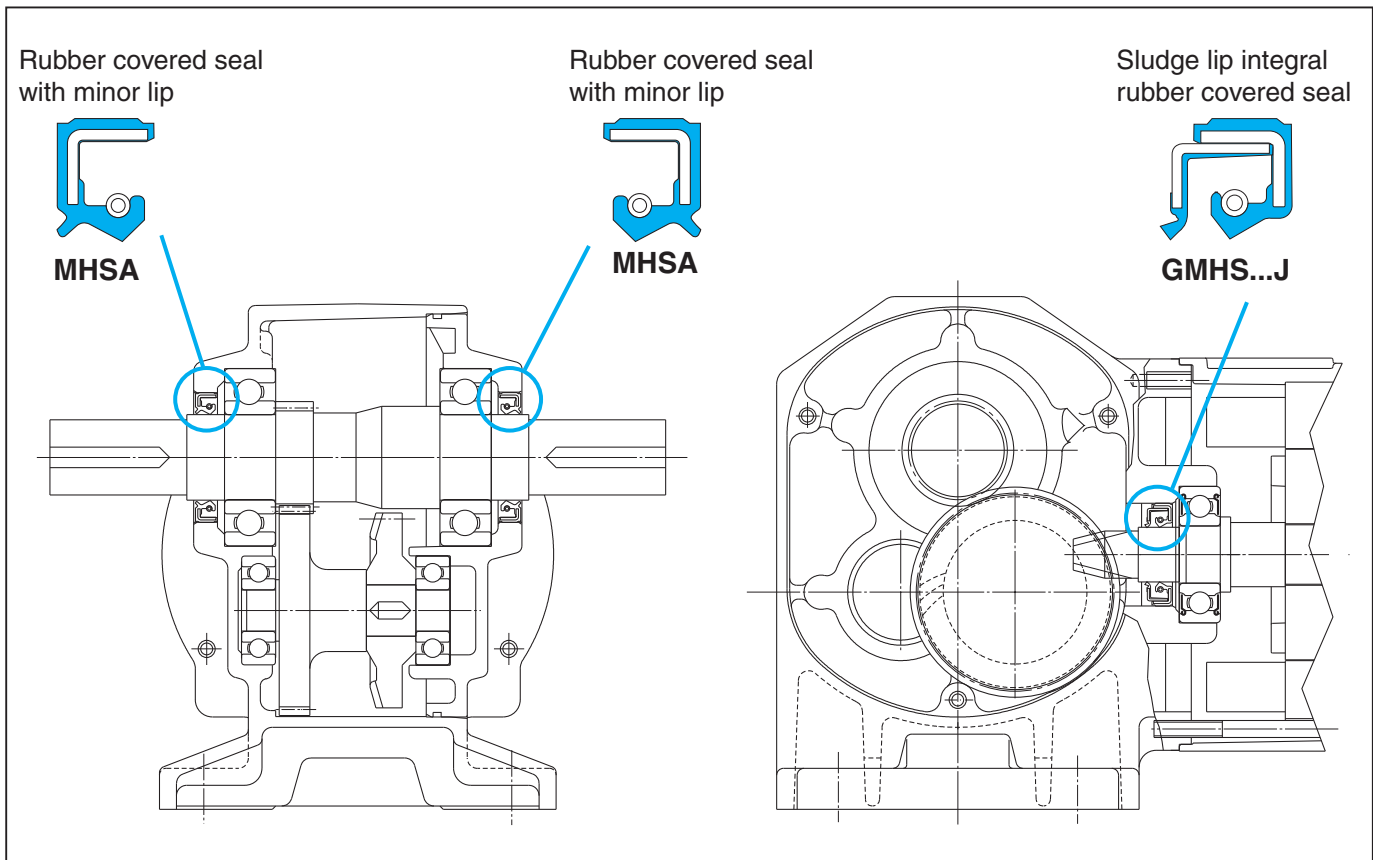

3.6 Hydraulic motor

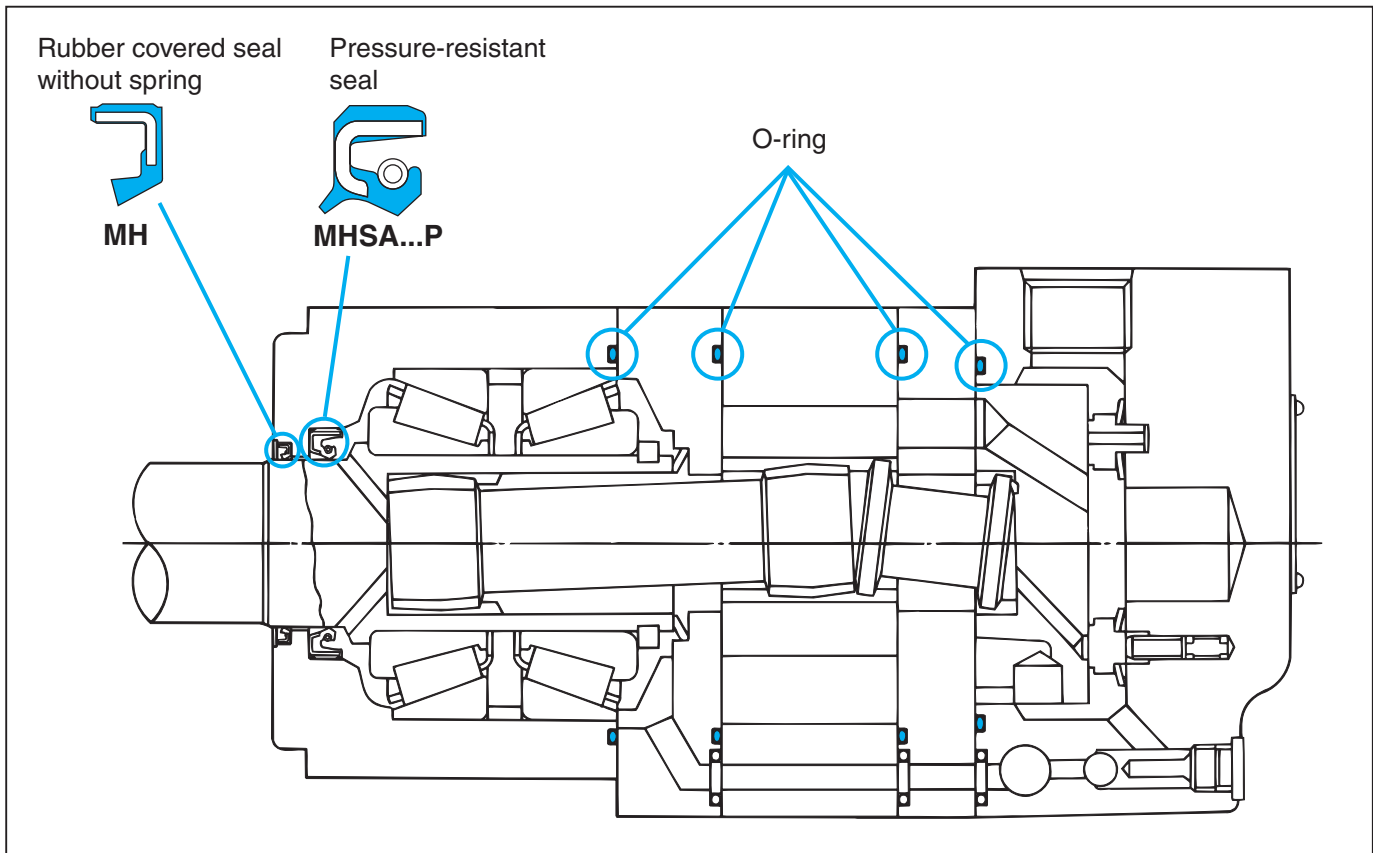

References

4.1 Rubber-material varieties and properties	152
4.2 SI units and conversion factors	154
4.3 Shaft tolerance	158
4.4 Housing bore tolerance	160
4.5 °C-°F temperature conversion table	162
4.6 Steel hardness conversion table	163
4.7 Viscosity conversion table	164
4.8 Shaft surface speed –Quick reference diagram–	165

Request Forms for Oil Seal Design and Production

..... 166

4.1 Rubber-material varieties and properties

This table compares the properties of all available rubber materials, including those that are not suitable for oil seals and O-rings.

◎ : Resistant to the substance.

○ : Resistant to the substance except under extreme conditions.

△ : Not resistant to the substance except under specific favorable conditions.

× : Not resistant to the substance.

Kind of rubber (ASTM code)		Nitrile rubber (NBR)	Hydrogenated nitrile rubber (HNBR)	Acrylic rubber (ACM and ANM)	Silicone rubber (VMQ)	Fluoro rubber (FKM)	Chloroprene rubber (CR)	Ethylene-propy- lene rubber (EPM and EPDM)	Styrene-buta- diene rubber (SBR)	Urethane rubber (U)	Natural rubber and isoprene rubber (NR and IR)	Butadiene rubber (BR)	Butyl rubber (IIR)	Chlorosulfonated polyethylene rubber (CSM)
Chemical structure		Acrylonitrile- butadiene copolymer	Hydrogenated acrylonitrile-buta- diene copolymer	Acrylic-ester copolymer	Organopoly- siloxane	Hexafluoropropy- lene-vinylidene- fluoride copolymer	Polychloroprene	Ethylene-propy- lene copolymer	Styrene-butadi- ene copolymer	Polyurethane	Polyisoprene	Polybutadiene	Isobutylene- isoprene copolymer	Chlorosulfonated polyethylene
Raw-rubber properties	Specific gravity	0.96 ~ 1.02	0.98 ~ 1.00	1.09 ~ 1.10	0.95 ~ 0.98	1.80 ~ 1.82	1.15 ~ 1.25	0.86 ~ 0.87	0.92 ~ 0.97	1.00 ~ 1.30	0.92	0.91 ~ 0.94	0.91 ~ 0.93	1.11 ~ 1.18
	Mooney viscosity ML ₁₊₄ (100 °C)	30 ~ 130	65 ~ 85	45 ~ 60	Liquid	35 ~ 160	45 ~ 120	40 ~ 100	30 ~ 70	25 ~ 60 (or liquid)	45 ~ 150	35 ~ 55	45 ~ 80	30 ~ 115
Compounded-rubber physical and resistance properties	Applicable JIS hardness range ¹⁾	20 ~ 100	40 ~ 100	40 ~ 90	30 ~ 90	50 ~ 90	10 ~ 90	30 ~ 90	30 ~ 100	60 ~ 100	10 ~ 100	30 ~ 100	20 ~ 90	50 ~ 90
	Tensile strength (MPa)	5 ~ 25	5 ~ 30	7 ~ 12	3 ~ 12	7 ~ 20	5 ~ 25	5 ~ 20	2 ~ 30	20 ~ 45	3 ~ 35	2 ~ 20	5 ~ 20	7 ~ 20
	Elongation (%)	800 ~ 100	800 ~ 100	600 ~ 100	500 ~ 50	500 ~ 100	1 000 ~ 100	800 ~ 100	800 ~ 100	800 ~ 300	1 000 ~ 100	800 ~ 100	800 ~ 100	500 ~ 100
	Impact resilience	○	○	△	◎	△	◎	○	○	◎	◎	◎	△	○
	Tear strength	○	○	△	× ~ △	○	○	△	△	◎	◎	○	○	○
	Abrasion resistance	◎	◎	○	× ~ △	◎	○ ~ ◎	○	◎	◎	◎	◎	○	◎
	Flex crack resistance	○	○	○	× ~ ○	○	○	○	○	◎	◎	△	◎	○
	Servisable temperature range (°C)	-50 ~ 120	-40 ~ 160	-30 ~ 180	-80 ~ 250	-30 ~ 250	-60 ~ 120	-60 ~ 150	-60 ~ 70	-60 ~ 80	-75 ~ 90	-100 ~ 100	-60 ~ 150	-60 ~ 150
	Aging resistance	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	◎	◎
	Resistance to weather	○	◎	◎	◎	◎	◎	◎	○	◎	○	○	◎	◎
	Ozone resistance	×	○	◎	◎	◎	◎	◎	×	◎	×	×	◎	◎
	Flame resistance	× ~ △	× ~ △	× ~ △	× ~ ○	◎	○	×	×	× ~ △	×	×	×	○
	Electrical insulation (Ω · cm) (volume resistivity)	10 ² ~ 10 ¹¹	—	10 ⁸ ~ 10 ¹⁰	10 ¹¹ ~ 10 ¹⁶	10 ¹⁰ ~ 10 ¹⁴	10 ¹⁰ ~ 10 ¹²	10 ¹² ~ 10 ¹⁶	10 ¹⁰ ~ 10 ¹⁵	10 ⁹ ~ 10 ¹²	10 ¹⁰ ~ 10 ¹⁵	10 ¹⁴ ~ 10 ¹⁵	10 ¹⁶ ~ 10 ¹⁸	10 ¹² ~ 10 ¹⁴
	Gas permeability (10 ⁻¹⁶ m ⁴ /N · s)	0.03 ~ 0.35	—	1	40	0.1	0.3	1.5	1.2	0.2	1.8	1.3 ~ 5	0.09 ~ 0.1	0.3
	Radiation resistance	△ ~ ○	△ ~ ○	× ~ ○	△ ~ ◎	△ ~ ○	△ ~ ○	×	○	○	△ ~ ○	×	×	△ ~ ○
Compound-rubber chemical resistance	Gasoline and light oil	◎	◎	◎	× ~ △	◎	○	×	×	◎	×	×	×	△
	Benzene and toluene	× ~ △	× ~ △	×	× ~ △	◎	×	△	×	× ~ △	×	×	△ ~ ○	× ~ △
	Alcohol	◎	◎	×	◎	◎	◎	◎	◎	△	◎	◎	◎	◎
	Ether	× ~ △	× ~ △	×	× ~ △	× ~ △	× ~ △	○	×	×	×	×	△ ~ ○	×
	Ketone (MEK)	×	×	×	○	×	△ ~ ○	◎	△ ~ ○	×	△ ~ ○	△ ~ ○	◎	△ ~ ○
	Ethyl acetate	× ~ △	× ~ △	×	△ ~ ◎	×	×	◎	× ~ △	△	× ~ △	× ~ △	◎	×
	Water	◎	◎	△	○	◎	◎	◎	◎	△	◎	◎	◎	◎
	Organic acid	× ~ △	× ~ △	×	○	×	× ~ △	×	×	×	×	×	△ ~ ○	△
	Concentrate inorganic acid solution	○	○	△	△	◎	○	○	△	×	△	△	◎	◎
	Dilute inorganic acid solution	○	○	○	○	◎	◎	◎	○	△	○	○	◎	◎
	Concentrate inorganic alkaline solution	○	○	△	◎	×	◎	◎	○	×	○	○	◎	◎
	Dilute inorganic alkaline solution	○	○	○	◎	△	◎	◎	○	×	○	○	◎	◎
Typical properties and major applications		The most com- mon oil-resis- tant rubber material. Good resis- tance to abra- sion. Widely used for oil seals and O-rings.	Excellent heat resistance and mechanical strength, in addition to having properties of nitrile rubber. An optimal material for oil seals for high-temperature or hydraulic applica- tions.	Compared with nitrile rubber, supe- rior in aging resis- tance. Suitable for sealing hydraulic fluids. Commonly used in automotive applications such as transmission, crankshaft, and valve stem.	Siloxane-based, excellent heat resistance and low-temperature resistance. Suitable for extreme-tem- perature envi- ronments and food processing applications.	Most excellent in resistance against various severe condi- tions. Optimal for use in proximi- ty to engines.	Well-balanced in resistance to weather, oil and heat. Commonly used to isolate vibra- tion and to coat wires. Some cases used for oil seals and O-rings.	Excellent weatherproof and water- proof. It is used for clad automo- biles and wires.	Compared with natural rubber, supe- rior in resis- tance to abra- sion and aging. Used as the material of tires and belts.	Superior mechan- ical strength and oil resistance, however relatively low heat resis- tance and water- proofness. Used in applica- tions where heat resistance is not essential.	Excellent resilience and superior abra- sion resis- tance. Oil resistance is relatively low. Used for tires and shoes.	Excellent in resilience and mechanical strength. But inferior in resistance to oil and to pressure. Used for pro- duce tires and sport goods.	Low gas per- meability and inferior in resilience. Commonly used for tubes and vibration iso- lators.	Superior aging resis- tance and chemical resistance. Used for hoses and cladding.

Note 1) Hardness measured by durometer.

References : Japanese Standards Association. Shinban Gomu Zairyo Sentaku no Pointo ("Rubber Material Selection Guidelines, Rev.").
Society of Rubber Industry, Japan. Gomu Kogyo Binran ("Rubber Industry Handbook"), 4th ed.

4.2 SI units and conversion factors

SI units and conversion factors (1)

Mass	SI units	Other Units ¹⁾	Conversion into SI units	Conversion from SI units
Angle	rad [radian(s)]	° [degree(s)] * ' [minute(s)] * " [second(s)] *	1° = $\pi / 180$ rad 1' = $\pi / 10\,800$ rad 1" = $\pi / 648\,000$ rad	1 rad = 57.295 78°
Length	m [meter(s)]	Å [Angstrom unit] μ [micron(s)] in [inch(es)] ft [foot(feet)] yd [yard(s)] mile [mile(s)]	1 Å = 10^{-10} m = 0.1 nm = 100 pm 1 μ = 1 μm 1 in = 25.4 mm 1 ft = 12 in = 0.304 8 m 1 yd = 3 ft = 0.914 4 m 1 mile = 5 280 ft = 1 609.344 m	1 m = 10^{10} Å 1 m = 39.37 in 1 m = 3.280 8 ft 1 m = 1.093 6 yd 1 km = 0.621 4 mile
Area	m ²	a [are(s)] ha [hectare(s)] acre [acre(s)]	1 a = 100 m ² 1 ha = 10 ⁴ m ² 1 acre = 4 840 yd ² = 4 046.86 m ²	1 km ² = 247.1 acre
Volume	m ³	ℓ, L [liter(s)] * cc [cubic centimeters] gal (US) [gallon(s)] floz (US) [fluid ounce(s)] barrel (US) [barrels(US)]	1 ℓ = 1 dm ³ = 10 ⁻³ m ³ 1 cc = 1 cm ³ = 10 ⁻⁶ m ³ 1 gal (US) = 231 in ³ = 3.785 41 dm ³ 1 floz (US) = 29.573 5 cm ³ 1 barrel (US) = 158.987 dm ³	1 m ³ = 10 ³ ℓ 1 m ³ = 10 ⁶ cc 1 m ³ = 264.17 gal 1 m ³ = 33 814 floz 1 m ³ = 6.289 8 barrel
Time	s [second(s)]	min [minute(s)] * h [hour(s)] * d [day(s)] *		
Angular velocity	rad/s			
Velocity	m/s	kn [knot(s)] m/h *	1 kn = 1 852 m/h	1 km/h = 0.539 96 kn
Acceleration	m/s ²	G	1 G = 9.806 65 m/s ²	1 m/s ² = 0.101 97 G
Frequency	Hz [hertz]	c/s [cycle(s)/second]	1 c/s = 1 s ⁻¹ = 1 Hz	
Rotational frequency	s ⁻¹	rpm [revolutions per minute] min ⁻¹ * r/min	1 rpm = 1/60 s ⁻¹	1 s ⁻¹ = 60 rpm
Mass	kg [kilogram(s)]	t [ton(s)] * lb [pound(s)] gr [grain(s)] oz [ounce(s)] ton (UK) [ton(s) (UK)] ton (US) [ton(s) (US)] car [carat(s)]	1 t = 10 ³ kg 1 lb = 0.453 592 37 kg 1 gr = 64.798 91 mg 1 oz = 1/16 lb = 28.349 5 g 1 ton (UK) = 1 016.05 kg 1 ton (US) = 907.185 kg 1 car = 200 mg	1 kg = 2.204 6 lb 1 g = 15.432 4 gr 1 kg = 35.274 0 oz 1 t = 0.984 2 ton (UK) 1 t = 1.102 3 ton (US) 1 g = 5 car

Note 1) * : Unit can be used as an SI unit.
No asterisk : Unit cannot be used.

SI units and conversion factors (2)

Mass	SI units	Other Units ¹⁾	Conversion into SI units	Conversion from SI units
Density	kg/m ³			
Linear density	kg/m			
Momentum	kg • m/s			
Moment of momentum, Angular momentum	$\left. \begin{array}{l} \\ \end{array} \right\} \text{kg} \cdot \text{m}^2/\text{s}$			
Moment of inertia	kg • m ²			
Force	N [newton(s)]	dyn [dyne(s)] kgf [kilogram-force] gf [gram-force] tf [ton-force] lbf [pound-force]	1 dyn = 10 ⁻⁵ N 1 kgf = 9.806 65 N 1 gf = 9.806 65 × 10 ⁻³ N 1 tf = 9.806 65 × 10 ³ N 1 lbf = 4.448 22 N	1 N = 10 ⁵ dyn 1 N = 0.101 97 kgf 1 N = 0.224 809 lbf
Moment of force	N • m [newton meter(s)]	gf • cm kgf • cm kgf • m tf • m lbf • ft	1 gf • cm = 9.806 65 × 10 ⁻⁵ N • m 1 kgf • cm = 9.806 65 × 10 ⁻² N • m 1 kgf • m = 9.806 65 N • m 1 tf • m = 9.806 65 × 10 ³ N • m 1 lbf • ft = 1.355 82 N • m	1 N • m = 0.101 97 kgf • m 1 N • m = 0.737 56 lbf • ft
Pressure, Normal stress	Pa [pascal(s)] or N/m ² {1 Pa = 1 N/m ² }	gf/cm ² kgf/mm ² kgf/m ² lbf/in ² bar [bar(s)] at [engineering air pressure] mH ₂ O, mAq [meter water column] atm [atmosphere] mHg [meter mercury column] Torr [torr]	1 gf/cm ² = 9.806 65 × 10 Pa 1 kgf/mm ² = 9.806 65 × 10 ⁶ Pa 1 kgf/m ² = 9.806 65 Pa 1 lbf/in ² = 6 894.76 Pa 1 bar = 10 ⁵ Pa 1 at = 1kgf/cm ² = 9.806 65 × 10 ⁴ Pa 1 mH ₂ O = 9.806 65 × 10 ³ Pa 1 atm = 101 325 Pa 1 mHg = $\frac{101\,325}{0.76}$ Pa 1 Torr = 1mmHg = 133.322 Pa	1 MPa = 0.101 97 kgf/mm ² 1 Pa = 0.101 97 kgf/m ² 1 Pa = 0.145 × 10 ⁻³ lbf/in ² 1 Pa = 10 ⁻² mbar 1 Pa = 7.500 6 × 10 ⁻³ Torr
Viscosity	Pa • s [pascal second]	P [poise] kgf • s/m ²	10 ⁻² P = 1 cP = 1 mPa • s 1 kgf • s/m ² = 9.806 65 Pa • s	1 Pa • s = 0.101 97 kgf • s/m ²
Kinematic viscosity	m ² /s	St [stokes]	10 ⁻² St = 1 cSt = 1 mm ² /s	
Surface tension	N/m			

SI units and conversion factors (3)

Mass	SI units	Other Units ¹⁾	Conversion into SI units	Conversion from SI units
Work, energy	J [joule(s)] {1 J = 1 N · m}	eV [electron volt(s)] * erg [erg(s)] kgf · m lbf · ft	1 eV = (1.602 189 2±0.000 004 6)×10 ⁻¹⁹ J 1 erg = 10 ⁻⁷ J 1 kgf · m = 9.806 65 J 1 lbf · ft = 1.355 82 J	1 J = 10 ⁷ erg 1 J = 0.101 97 kgf · m 1 J = 0.737 56 lbf · ft
Power	W [watt(s)]	erg/s [ergs per second] kgf · m/s PS [French horse-power] HP [horse-power (British)] lbf · ft/s	1 erg/s = 10 ⁻⁷ W 1 kgf · m/s = 9.806 65 W 1 PS = 75 kgf · m/s = 735.5 W 1 HP = 550 lbf · ft/s = 745.7 W 1 lbf · ft/s = 1.355 82 W	1 W = 0.101 97 kgf · m/s 1 W = 0.001 36 PS 1 W = 0.001 34 HP
Thermo-dynamic temperature	K [kelvin(s)]			
Celsius temperature	°C [celsius(s)] {t°C = (t+273.15) K}	°F [degree(s) Fahrenheit]	t°F = $\frac{5}{9}(t - 32)^\circ\text{C}$	t°C = $(\frac{9}{5}t + 32)^\circ\text{F}$
Linear expansion coefficient	K ⁻¹	°C ⁻¹ [per degree]		
Heat	J [joule(s)] {1 J = 1 N · m}	erg [erg(s)] kgf · m cal _{IT} [I. T. calories]	1 erg = 10 ⁻⁷ J 1 cal _{IT} = 4.186 8 J 1 Mcal _{IT} = 1.163 kW · h	1 J = 10 ⁷ erg 1 J = 0.238 85 cal _{IT} 1 kW · h = 0.86 × 10 ⁶ cal _{IT}
Thermal conductivity	W/ (m · K)	W/ (m · °C) cal/ (s · m · °C)	1 W/ (m · °C) = 1 W/ (m · K) 1 cal/ (s · m · °C) = 4.186 05 W/ (m · K)	
Coefficient of heat transfer	W/ (m ² · K)	W/ (m ² · °C) cal/ (s · m ² · °C)	1 W/ (m ² · °C) = 1 W/ (m ² · K) 1 cal/ (s · m ² · °C) = 4.186 05 W/ (m ² · K)	
Heat capacity	J/K	J/°C	1 J/°C = 1 J/K	
Massic heat capacity	J/ (kg · K)	J/ (kg · °C)		

Note 1) * : Unit can be used as an SI unit.
No asterisk : Unit cannot be used.

SI units and conversion factors (4)

Mass	SI units	Other Units ¹⁾	Conversion into SI units	Conversion from SI units
Electric current	A [ampere(s)]			
Electric charge, quantity of electricity	C [coulomb(s)] {1 C = 1 A · s}	A · h *	1 A · h = 3.6 kC	
Tension, electric potential	V [volt(s)] {1 V = 1 W/A}			
Capacitance	F [farad(s)] {1 F = 1 C/V}			
Magnetic field strength	A/m	Oe [oersted(s)]	$1 \text{ Oe} = \frac{10^3}{4\pi} \text{ A/m}$	$1 \text{ A/m} = 4\pi \times 10^{-3} \text{ Oe}$
Magnetic flux density	T [tesla(s)] $\left\{ \begin{array}{l} 1 \text{ T} = 1 \text{ N}/(\text{A} \cdot \text{m}) \\ = 1 \text{ Wb}/\text{m}^2 \\ = 1 \text{ V} \cdot \text{s}/\text{m}^2 \end{array} \right\}$	Gs [gauss(es)] γ [gamma(s)]	$1 \text{ Gs} = 10^{-4} \text{ T}$ $1 \gamma = 10^{-9} \text{ T}$	$1 \text{ T} = 10^4 \text{ Gs}$ $1 \text{ T} = 10^9 \gamma$
Magnetic flux	Wb [weber(s)] {1 Wb = 1 V · s}	Mx [maxwell(s)]	$1 \text{ Mx} = 10^{-8} \text{ Wb}$	$1 \text{ Wb} = 10^8 \text{ Mx}$
Self inductance	H [henry (– ries)] {1 H = 1 Wb/A}			
Resistance (to direct current)	Ω [ohm(s)] {1 Ω = 1 V/A}			
Conductance (to direct current)	S [siemens] {1 S = 1 A/V}			
Active power	W $\left\{ \begin{array}{l} 1 \text{ W} = 1 \text{ J/s} \\ = 1 \text{ A} \cdot \text{V} \end{array} \right\}$			

158

159

Nominal bore diameter mm		Deviation classes of housing bore diameter																				Nominal bore diameter mm									
over	up to	E6	F6	F7	G6	G7	H6	H7	H8	H9	H10	JS5	JS6	JS7	J6	J7		K5	K6	K7	M5	M6	M7	N5	N6	N7	P6	P7	R7	over	up to
3	6	+ 28 + 20	+ 18 + 10	+ 22 + 10	+ 12 + 4	+ 16 + 4	+ 8 0	+ 12 0	+ 18 0	+ 30 0	+ 48 0	± 2.5	± 4	± 6	+ 5 − 3	± 6		0 − 5	+ 2 − 6	+ 3 − 9	− 3 − 8	− 1 − 9	0 − 12	− 7 − 12	− 5 − 13	− 4 − 16	− 9 − 17	− 8 − 20	− 11 − 23	3	6
6	10	+ 34 + 25	+ 22 + 13	+ 28 + 13	+ 14 + 5	+ 20 + 5	+ 9 0	+ 15 0	+ 22 0	+ 36 0	+ 58 0	± 3	± 4.5	± 7.5	+ 5 − 4	+ 8 − 7		+ 1 − 5	+ 2 − 7	+ 5 − 10	− 4 − 10	− 3 − 12	0 − 15	− 8 − 14	− 7 − 16	− 4 − 19	− 12 − 21	− 9 − 24	− 13 − 28	6	10
10	18	+ 43 + 32	+ 27 + 16	+ 34 + 16	+ 17 + 6	+ 24 + 6	+ 11 0	+ 18 0	+ 27 0	+ 43 0	+ 70 0	± 4	± 5.5	± 9	+ 6 − 5	+ 10 − 8		+ 2 − 6	+ 2 − 9	+ 6 − 12	− 4 − 12	− 4 − 15	0 − 18	− 9 − 17	− 9 − 20	− 5 − 23	− 15 − 26	− 11 − 29	− 16 − 34	10	18
18	30	+ 53 + 40	+ 33 + 20	+ 41 + 20	+ 20 + 7	+ 28 + 7	+ 13 0	+ 21 0	+ 33 0	+ 52 0	+ 84 0	± 4.5	± 6.5	±10.5	+ 8 − 5	+ 12 − 9		+ 1 − 8	+ 2 − 11	+ 6 − 15	− 5 − 14	− 4 − 17	0 − 21	− 12 − 21	− 11 − 24	− 7 − 28	− 18 − 31	− 14 − 35	− 20 − 41	18	30
30	50	+ 66 + 50	+ 41 + 25	+ 50 + 25	+ 25 + 9	+ 34 + 9	+ 16 0	+ 25 0	+ 39 0	+ 62 0	+100 0	± 5.5	± 8	±12.5	+ 10 − 6	+ 14 − 11		+ 2 − 9	+ 3 − 13	+ 7 − 18	− 5 − 16	− 4 − 20	0 − 25	− 13 − 24	− 12 − 28	− 8 − 33	− 21 − 37	− 17 − 42	− 25 − 50	30	50
50	80	+ 79 + 60	+ 49 + 30	+ 60 + 30	+ 29 + 10	+ 40 + 10	+ 19 0	+ 30 0	+ 46 0	+ 74 0	+120 0	± 6.5	± 9.5	±15	+ 13 − 6	+ 18 − 12		+ 3 − 10	+ 4 − 15	+ 9 − 21	− 6 − 19	− 5 − 24	0 − 30	− 15 − 28	− 14 − 33	− 9 − 39	− 26 − 45	− 21 − 51	− 30 − 60 − 32 − 62	50	65
80	120	+ 94 + 72	+ 58 + 36	+ 71 + 36	+ 34 + 12	+ 47 + 12	+ 22 0	+ 35 0	+ 54 0	+ 87 0	+140 0	± 7.5	±11	±17.5	+ 16 − 6	+ 22 − 13		+ 2 − 13	+ 4 − 18	+ 10 − 25	− 8 − 23	− 6 − 28	0 − 35	− 18 − 33	− 16 − 38	− 10 − 45	− 30 − 52	− 24 − 59	− 38 − 73 − 41 − 76	80	100
120	180	+110 + 85	+ 68 + 43	+ 83 + 43	+ 39 + 14	+ 54 + 14	+ 25 0	+ 40 0	+ 63 0	+100 0	+160 0	± 9	±12.5	±20	+ 18 − 7	+ 26 − 14		+ 3 − 15	+ 4 − 21	+ 12 − 28	− 9 − 27	− 8 − 33	0 − 40	− 21 − 39	− 20 − 45	− 12 − 52	− 36 − 61	− 28 − 68	− 48 − 88 − 50 − 90 − 53 − 93	120	140
180	250	+129 +100	+ 79 + 50	+96 +50	+ 44 + 15	+ 61 + 15	+ 29 0	+ 46 0	+ 72 0	+115 0	+185 0	±10	±14.5	±23	+ 22 − 7	+ 30 − 16		+ 2 − 18	+ 5 − 24	+ 13 − 33	− 11 − 31	− 8 − 37	0 − 46	− 25 − 45	− 22 − 51	− 14 − 60	− 41 − 70	− 33 − 79	− 60 − 106 − 63 − 109 − 67 − 113	180	200
250	315	+142 +110	+ 88 + 56	+108 + 56	+ 49 + 17	+ 69 + 17	+ 32 0	+ 52 0	+ 81 0	+130 0	+210 0	±11.5	±16	±26	+ 25 − 7	+ 36 − 16		+ 3 − 20	+ 5 − 27	+ 16 − 36	− 13 − 36	− 9 − 41	0 − 52	− 27 − 50	− 25 − 57	− 14 − 66	− 47 − 79	− 36 − 88			

4.5 °C - °F temperature conversion table

°C		°F	°C		°F	°C		°F	°C		°F
- 73	- 100	- 148	- 1.6	29	84.2	17.7	64	147.2	37.1	99	210.2
- 62	- 80	- 112	- 1.1	30	86.0	18.2	65	149.0	37.7	100	212
- 51	- 60	- 76	- 0.6	31	87.8	18.8	66	150.8	40.6	105	221
- 40	- 40	- 40	0	32	89.6	19.3	67	152.6	43	110	230
- 29	- 20	- 4	0.5	33	91.4	19.9	68	154.4	49	120	248
- 23.3	- 10	14	1.1	34	93.2	20.4	69	156.2	54	130	266
- 17.7	0	32	1.6	35	95.0	21.0	70	158.0	60	140	284
- 17.2	1	33.8	2.2	36	96.8	21.5	71	159.8	65	150	302
- 16.6	2	35.6	2.7	37	98.6	22.2	72	161.6	71	160	320
- 16.1	3	37.4	3.3	38	100.4	22.7	73	163.4	76	170	338
- 15.5	4	39.2	3.8	39	102.2	23.3	74	165.2	83	180	356
- 15.0	5	41.0	4.4	40	104.0	23.8	75	167.0	88	190	374
- 14.4	6	42.8	4.9	41	105.8	24.4	76	168.8	93	200	392
- 13.9	7	44.6	5.4	42	107.6	25.0	77	170.6	121	250	482
- 13.3	8	46.4	6.0	43	109.4	25.5	78	172.4	149	300	572
- 12.7	9	48.2	6.6	44	111.2	26.2	79	174.2	177	350	662
- 12.2	10	50.0	7.1	45	113.0	26.8	80	176.0	204	400	752
- 11.6	11	51.8	7.7	46	114.8	27.3	81	177.8	232	450	842
- 11.1	12	53.6	8.2	47	116.6	27.7	82	179.6	260	500	932
- 10.5	13	55.4	8.8	48	118.4	28.2	83	181.4	288	550	1 022
- 10.0	14	57.2	9.3	49	120.2	28.8	84	183.2	315	600	1 112
- 9.4	15	59.0	9.9	50	122.0	29.3	85	185.0	343	650	1 202
- 8.8	16	61.8	10.4	51	123.8	29.9	86	186.8	371	700	1 292
- 8.3	17	63.6	11.1	52	125.6	30.4	87	188.6	399	750	1 382
- 7.7	18	65.4	11.5	53	127.4	31.0	88	190.4	426	800	1 472
- 7.2	19	67.2	12.1	54	129.2	31.5	89	192.2	454	850	1 562
- 6.6	20	68.0	12.6	55	131.0	32.1	90	194.0	482	900	1 652
- 6.1	21	69.8	13.2	56	132.8	32.6	91	195.8	510	950	1 742
- 5.5	22	71.6	13.7	57	134.6	33.3	92	197.6	538	1 000	1 832
- 5.0	23	73.4	14.3	58	136.4	33.8	93	199.4	593	1 100	2 012
- 4.4	24	75.2	14.8	59	138.2	34.4	94	201.2	648	1 200	2 192
- 3.9	25	77.0	15.6	60	140.0	34.9	95	203.0	704	1 300	2 372
- 3.3	26	78.8	16.1	61	141.8	35.5	96	204.8	760	1 400	2 552
- 2.8	27	80.6	16.6	62	143.6	36.1	97	206.6	815	1 500	2 732
- 2.2	28	82.4	17.1	63	145.4	36.6	98	208.4	871	1 600	2 937

Example

The center columns of numbers is the temperature in either degrees Centigrade (°C) or Fahrenheit (°F) whichever is desired to convert into the other.
If degrees Fahrenheit is given, read degrees Centigrade to the left. If degrees Centigrade is given, read degrees Fahrenheit to the right.

$$C = \frac{5}{9}(F - 32)$$

$$F = \frac{9}{5}C + 32$$

4.6 Steel hardness conversion table

Rockwell	Vicker's	Brinell		Rockwell		Shore
C-scale 1471.0 N {150 kgf}		Standard ball	Tungsten carbide ball	A-scale 588.4 N {60 kgf}	B-scale 980.7 N {100 kgf}	
68	940			85.6		97
67	900			85.0		95
66	865			84.5		92
65	832		739	83.9		91
64	800		722	83.4		88
63	772		705	82.8		87
62	746		688	82.3		85
61	720		670	81.8		83
60	697		654	81.2		81
59	674		634	80.7		80
58	653		615	80.1		78
57	633		595	79.6		76
56	613		577	79.0		75
55	595	—	560	78.5		74
54	577	—	543	78.0		72
53	560	—	525	77.4		71
52	544	500	512	76.8		69
51	528	487	496	76.3		68
50	513	475	481	75.9		67
49	498	464	469	75.2		66
48	484	451	455	74.7		64
47	471	442	443	74.1		63
46	458	432	432	73.6		62
45	446	421		73.1		60
44	434	409		72.5		58
43	423	400		72.0		57
42	412	390		71.5		56
41	402	381		70.9		55
40	392	371		70.4	—	54
39	382	362		69.9	—	52
38	372	353		69.4	—	51
37	363	344		68.9	—	50
36	354	336		68.4	(109.0)	49
35	345	327		67.9	(108.5)	48
34	336	319		67.4	(108.0)	47
33	327	311		66.8	(107.5)	46
32	318	301		66.3	(107.0)	44
31	310	294		65.8	(106.0)	43
30	302	286		65.3	(105.5)	42
29	294	279		64.7	(104.5)	41
28	286	271		64.3	(104.0)	41
27	279	264		63.8	(103.0)	40
26	272	258		63.3	(102.5)	38
25	266	253		62.8	(101.5)	38
24	260	247		62.4	(101.0)	37
23	254	243		62.0	100.0	36
22	248	237		61.5	99.0	35
21	243	231		61.0	98.5	35
20	238	226		60.5	97.8	34
(18)	230	219		—	96.7	33
(16)	222	212		—	95.5	32
(14)	213	203		—	93.9	31
(12)	204	194		—	92.3	29
(10)	196	187			90.7	28
(8)	188	179			89.5	27
(6)	180	171			87.1	26
(4)	173	165			85.5	25
(2)	166	158			83.5	24
(0)	160	152			81.7	24


4.7 Viscosity conversion table

Kinematic viscosity mm ² /s	Saybolt SUS (second)		Redwood R (second)		Engler E (degree)
	100 °F	210 °F	50 °C	100 °C	
2	32.6	32.8	30.8	31.2	1.14
3	36.0	36.3	33.3	33.7	1.22
4	39.1	39.4	35.9	36.5	1.31
5	42.3	42.6	38.5	39.1	1.40
6	45.5	45.8	41.1	41.7	1.48
7	48.7	49.0	43.7	44.3	1.56
8	52.0	52.4	46.3	47.0	1.65
9	55.4	55.8	49.1	50.0	1.75
10	58.8	59.2	52.1	52.9	1.84
11	62.3	62.7	55.1	56.0	1.93
12	65.9	66.4	58.2	59.1	2.02
13	69.6	70.1	61.4	62.3	2.12
14	73.4	73.9	64.7	65.6	2.22
15	77.2	77.7	68.0	69.1	2.32
16	81.1	81.7	71.5	72.6	2.43
17	85.1	85.7	75.0	76.1	2.54
18	89.2	89.8	78.6	79.7	2.64
19	93.3	94.0	82.1	83.6	2.76
20	97.5	98.2	85.8	87.4	2.87
21	102	102	89.5	91.3	2.98
22	106	107	93.3	95.1	3.10
23	110	111	97.1	98.9	3.22
24	115	115	101	103	3.34
25	119	120	105	107	3.46
26	123	124	109	111	3.58
27	128	129	112	115	3.70
28	132	133	116	119	3.82
29	137	138	120	123	3.95
30	141	142	124	127	4.07
31	145	146	128	131	4.20
32	150	150	132	135	4.32
33	154	155	136	139	4.45
34	159	160	140	143	4.57

Kinematic viscosity mm ² /s	Saybolt SUS (second)		Redwood R (second)		Engler E (degree)
	100 °F	210 °F	50 °C	100 °C	
35	163	164	144	147	4.70
36	168	170	148	151	4.83
37	172	173	153	155	4.96
38	177	178	156	159	5.08
39	181	183	160	164	5.21
40	186	187	164	168	5.34
41	190	192	168	172	5.47
42	195	196	172	176	5.59
43	199	201	176	180	5.72
44	204	205	180	185	5.85
45	208	210	184	189	5.98
46	213	215	188	193	6.11
47	218	219	193	197	6.24
48	222	224	197	202	6.37
49	227	228	201	206	6.50
50	231	233	205	210	6.63
55	254	256	225	231	7.24
60	277	279	245	252	7.90
65	300	302	266	273	8.55
70	323	326	286	294	9.21
75	346	349	306	315	9.89
80	371	373	326	336	10.5
85	394	397	347	357	11.2
90	417	420	367	378	11.8
95	440	443	387	399	12.5
100	464	467	408	420	13.2
120	556	560	490	504	15.8
140	649	653	571	588	18.4
160	742	747	653	672	21.1
180	834	840	734	757	23.7
200	927	933	816	841	26.3
250	1 159	1 167	1 020	1 051	32.9
300	1 391	1 400	1 224	1 241	39.5


Remark) 1 mm²/s=1 cSt (centi stokes)

4.8 Shaft surface speed – Quick reference diagram –

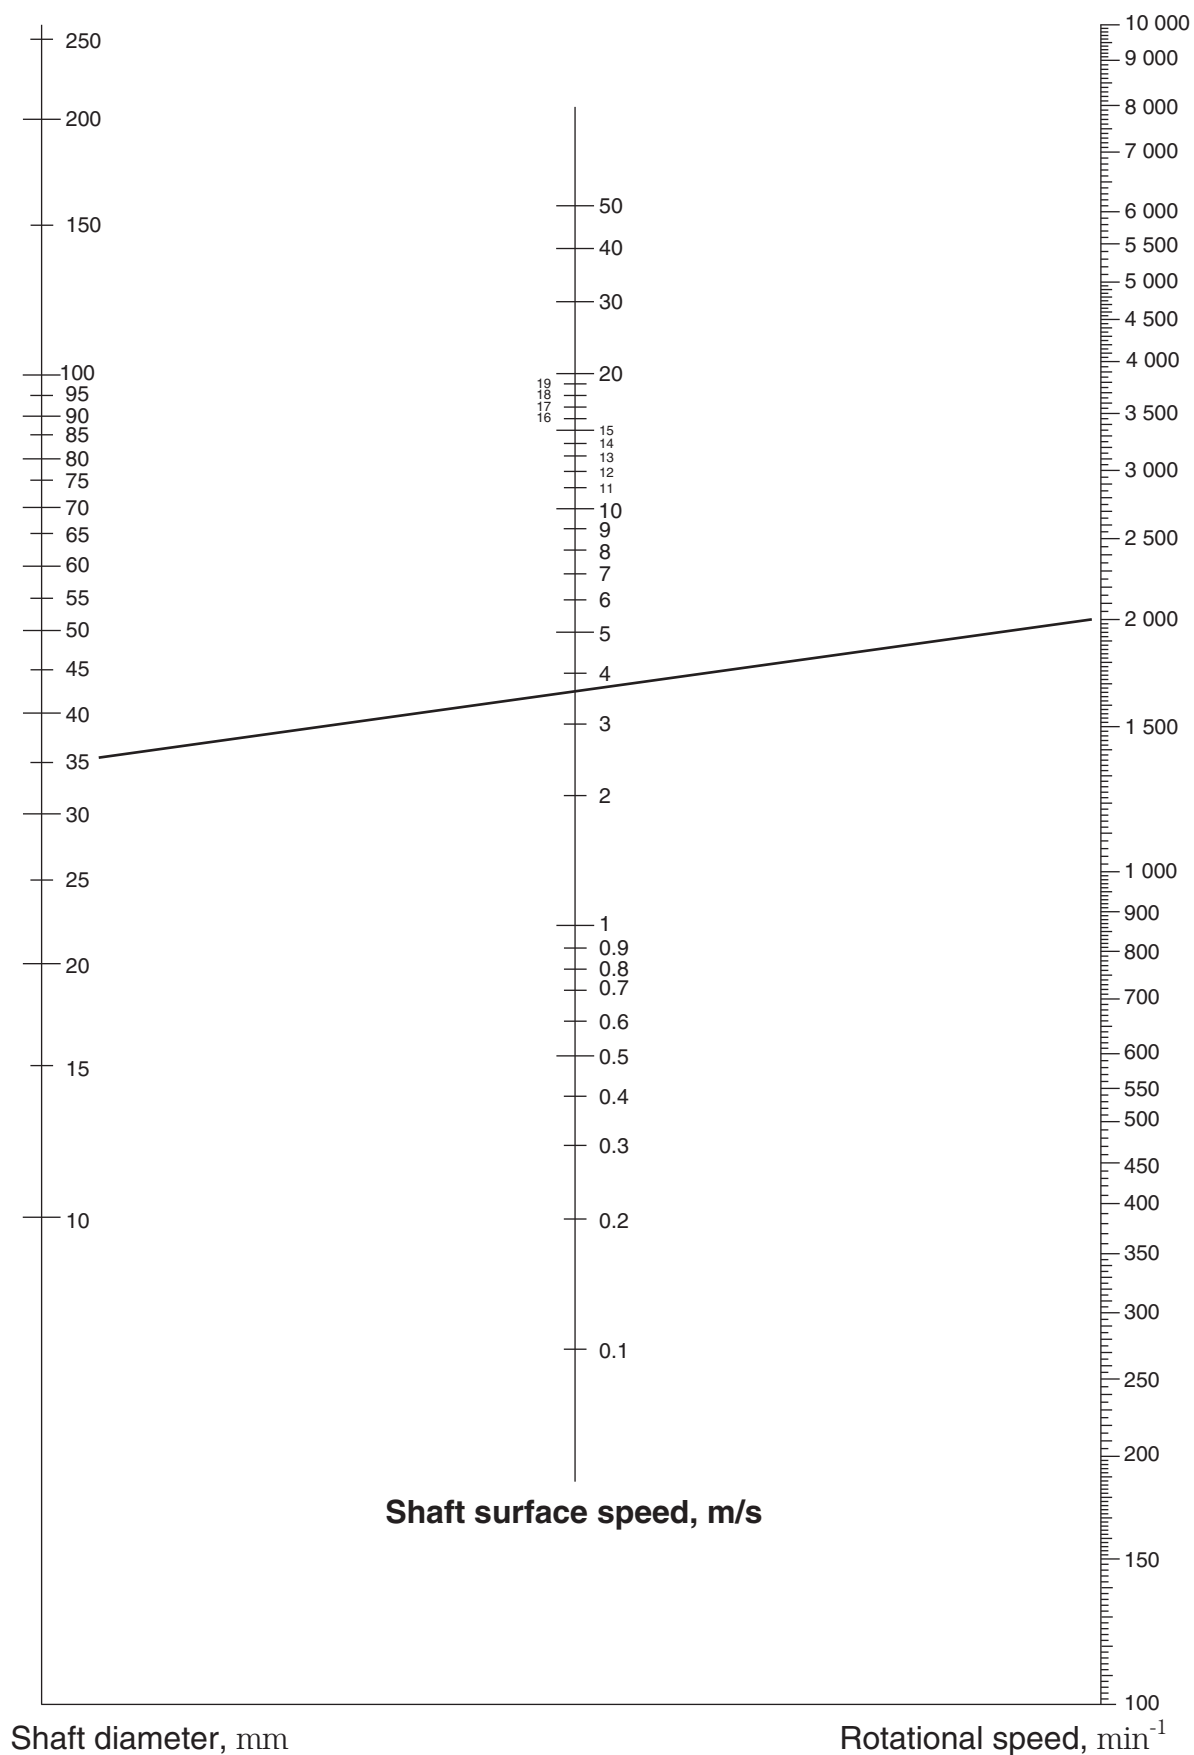


Steel production equipment operates in high-temperature environments where a large amount of water is used. In order to secure the stable operation of steel production equipment, JTEKT produces optimal oil seals that contribute to ensuring a favorable working environment where the equipment demonstrate its true potential. We offer a complete range of sealing technology services, including oil seals and surrounding structures such as bearings, drive shafts and other key components.


Sintering Machine Pallet Cars

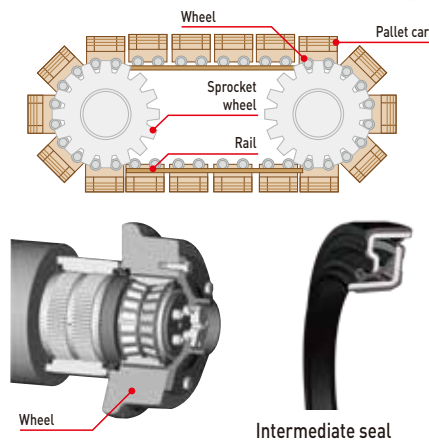




Converter Furnaces

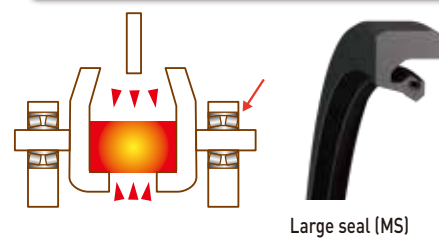

Continuous Casting Machines

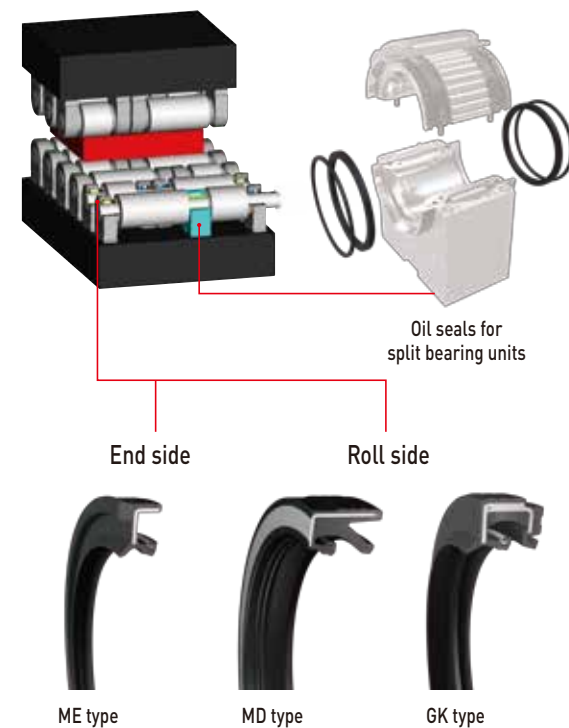


Rolling Mill

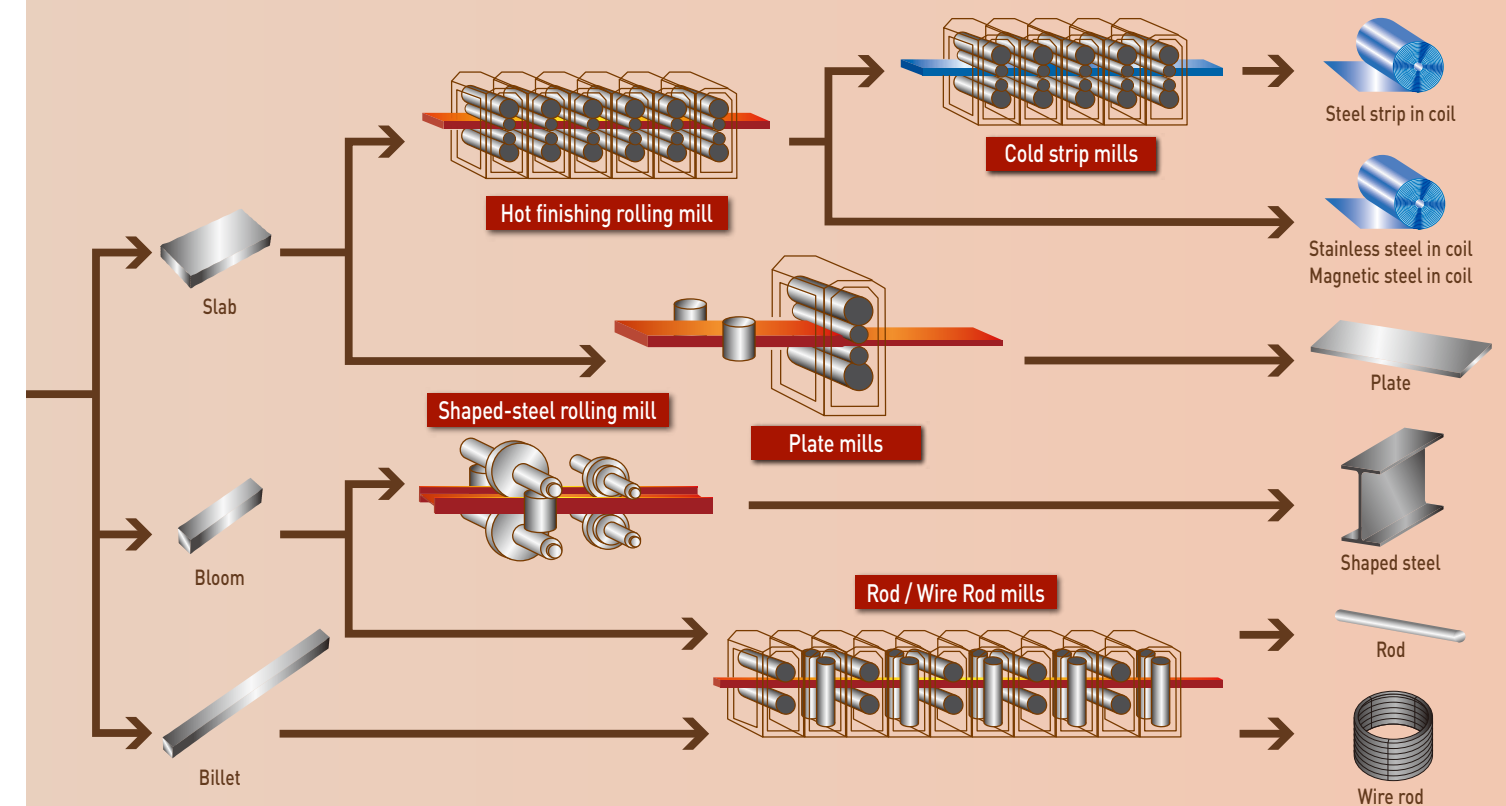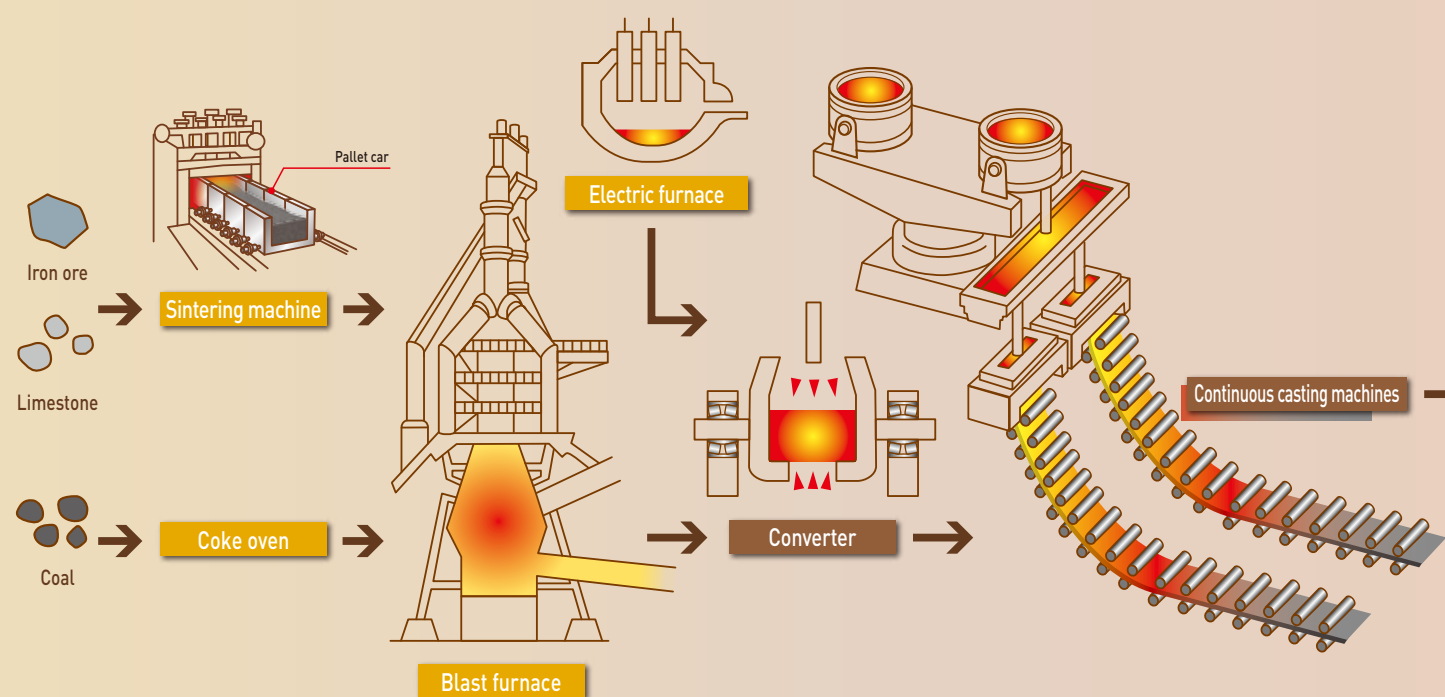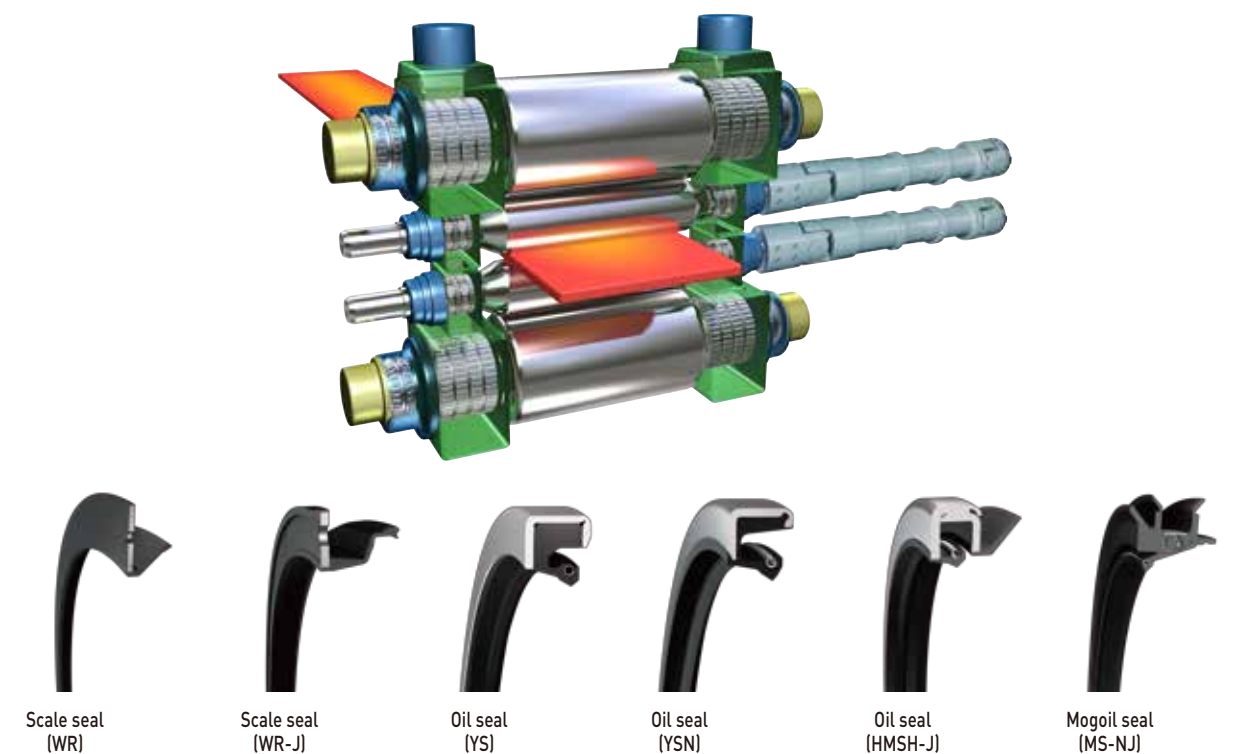


Examples of Oil Seal Applications

Cold Rolling Mill Backup Rolls

- The WR seal is often used as a scale seal owing to it featuring a side lip that gives it superior ability to shake off rolling water.
- Oil seals are attached back-to-back and play an important role in preventing bearing oil leaks.

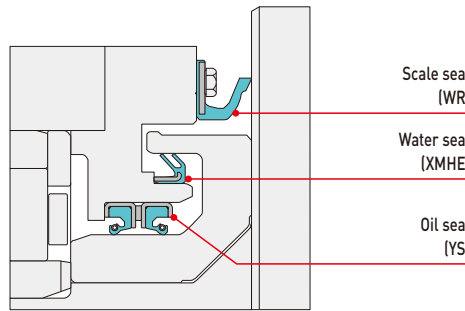


Rolling Mill Work Rolls

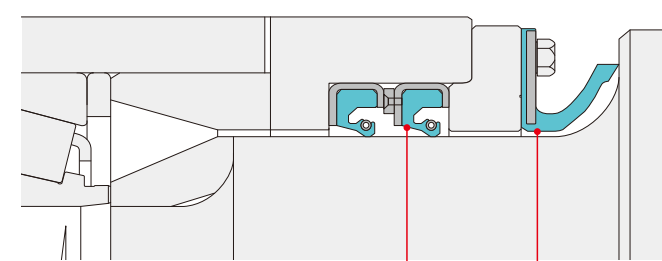


- Comprised of scale seal and oil seal.
- Both oil seals installed facing towards the roll to prevent the infiltration of rolling water.

Sealed type four-row tapered roller bearings

- Holds grease in the bearing and prevents the infiltration of rolling water and scale from outside.

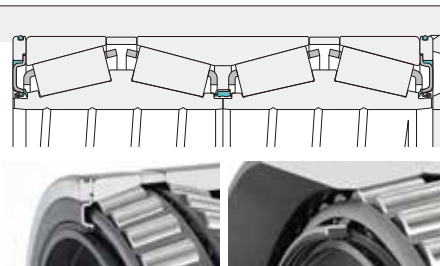


Shaped-steel Rolling Mill

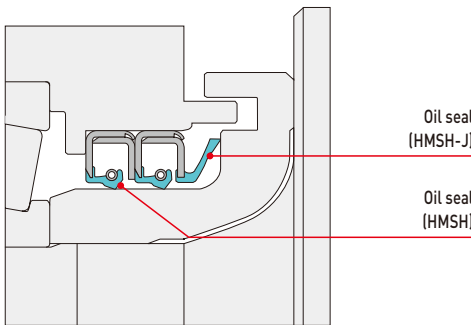

- A HMSH-J oil seal with scale seal function added is used on the roll side to prevent the infiltration of scale.


High-speed Cold Rolling Mill Backup Rolls

- If the roll rotation speed exceeds 1,800min⁻¹, the durability of the scale seal is improved thanks to its low heat generation specification.
- Infiltration of rolling water is prevented by using two scale seals.
- Oil seals for low-heat generating specifications.

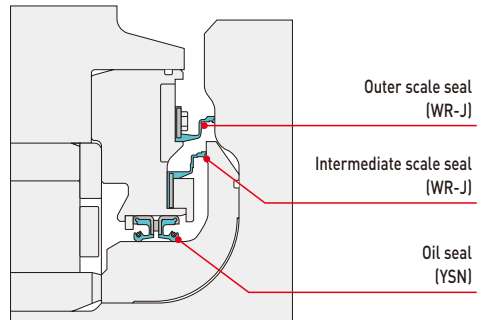


Hot Rolling Mill Backup Rolls

- The WR-RJ scale seal with a radial lip for superior following of axial displacement and the H-J scale cover can also be used.
- Two oil seals installed facing towards the roll play an important part in preventing water infiltration.

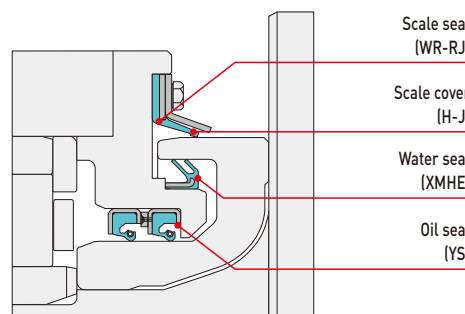

Mogoli Bearing (Slide Bearing)

- Scale seal is combined with a seal inner ring to make the infiltration path complex and shake off rolling water.
- In addition to the ability to shake off water, the Mogoli seal increases sealability using a seal lip.

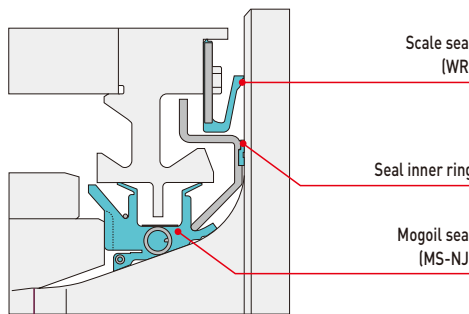

Features of Each Oil Seal

Scale Seal				
Category				
Type	WR	WR-RJ + H-J	WR-J	WR-BJ
Shape				
Features	• Standard scale seal product • Side lip has superior ability to prevent rolling water/scale infiltration	• Used when there is frequent movement in the axial direction • Scale cover (H-J) is used if rolling water come in direct contact with the seal	• Low torque specifications • Appropriate for high-speed cold rolling, dry milling and other specifications where heat generation and lubrication are difficult	• Used if there is no space to install in the radial direction • Tightened and secured with a steel band


Category	Oil Seal				
Type	YS	YSA	YS-J	YS-P	YSN
Shape					
Features	● Standard oil seal product ● Superior installation ability owing to use of robust steel band ● Spring less likely to come out as rubber covers more than 75% of the bearing	● YS oil seal with an additional auxiliary lip to prevent the infiltration of dust	● YS oil seal with scale seal modification added for when there is insufficient space to install a scale seal	● YS with pressure-resistant specification ● Additional backup ring on the lip prevents lip from turning due to pressure, reduces lip temperature by providing support	● Often used for low-torque YS specifications but can be used with general specifications

Category	Oil Seal				Water Seal	V ring
Type	MS	MSA	HMSH	HMSH-J	XMHE	MV-A
Shape						
Features	● Easy-to-install oil seal comprised of rubber and hook-type spring ● If shaft cannot be removed, a one cut-type oil seal (MS-C) is used	● MS oil seal with an auxiliary lip added to prevent the infiltration of dust	● Small-diameter oil seal (outer diameter 300mm or less)	● HMSH oil seal with scale seal modification added for when there is insufficient space to install a scale seal	● Seal lip is installed facing outward, with the two spaces functioning as a conduit to direct rolling water from the top to the bottom and prevent infiltration of rolling water and scale	● A seal made of only rubber stretched and attached to the shaft ● Used as an alternative to a scale seal

Category	Mogoli Seal		Block Mill Seal	
Type	MS-J	MS-NJ	M-BNJ	WR-J
Shape				
Features	● Standard Mogoli seal product ● Easy-to-install seal that prevents the infiltration of oil and water ● Rotates due to being secured to the roll neck, and therefore has superior shake off performance	● Lip contact is stable owing to the different shapes of the lip and end-plate, thereby achieving superior sealability performance compared to the MS-J	● Standard block mill seal product ● Prevents infiltration of oil and water at ultrahigh-speed rotation of 100 m/s	● Improved product durability with superior detachability ● Uses two seals, one each for oil and water, for tough specification conditions, with seal on water side only easy to replace

Oil Seal (YS) Features


- Wider driving surface when assembling seal on the choke prevents seal distortion, and steel band made of enhanced high-strength material is used
- Spring cover ratio increased to prevent spring from coming off when inserting into roll

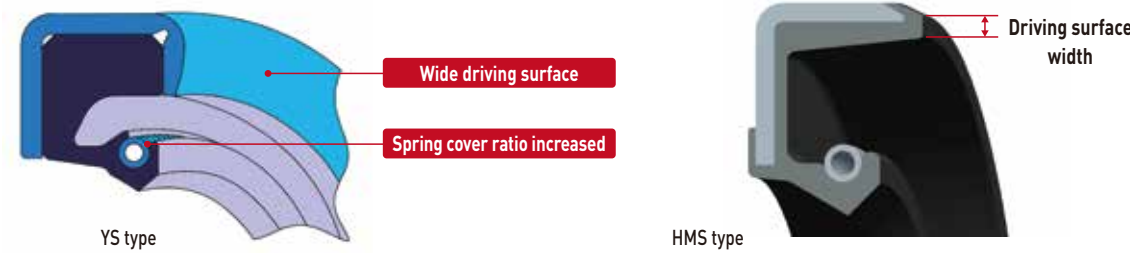

Scale Seal (WR & WR-J) Features


(Standard products)

- Used in locations exposed to large volumes of water, such as hot rolling mills, owing to superior ability to prevent water and scale infiltration




(Low-torque products)

- Used for high-speed cold rolling owing to the ability to suppress rising lip temperature




- Lip temperature on actual machine measured and reflected in design

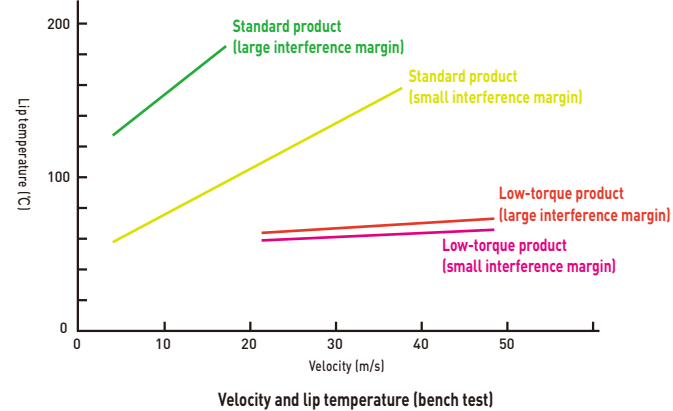

Types of Rolls


Roll configuration example 1 (single and split rolls)

Optimal configuration for roll elongation absorption using single and split rolls

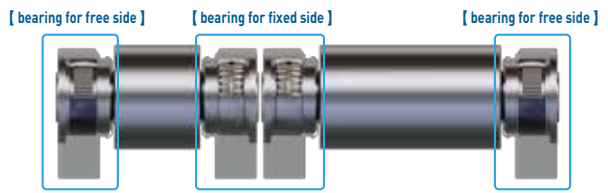

Roll configuration example 2 (pestle-shaped roll)

Optimal configuration for roll elongation absorption using pestle-shaped roll

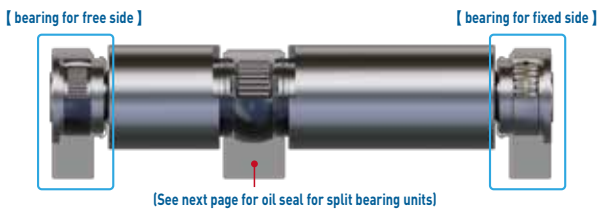



Oil Seals for Free Side/Fixed Side Bearing Housing Units

- Features
- Bumper lip shape for main lip alleviates shaft wear
 - Protective lip suppresses water/scale infiltration
 - Hydrogenated nitrile rubber (HNBR) used as standard rubber material, featuring superior heat resistance that ensures more stable use when exposed to water vapor



■ Discharge and recovery methods for bearing house grease and oil/air

		End side	Roll side	
		ME type	MD type	GK type
Shape				
Characteristic		Standard end-side product	Improved sealability with protective lip	Vent for improved lubrication and suppressing wear on shaft and lip
Grease	Discharge method	○	○	—
	Recovery method	○	—	○
Oil/Air	Discharge method	○	○	—
	Recovery method	○	○	—

Bearing Housing Grease discharge method
Oil/Air discharge method
Oil/Air recovery method

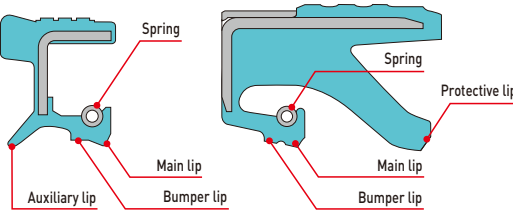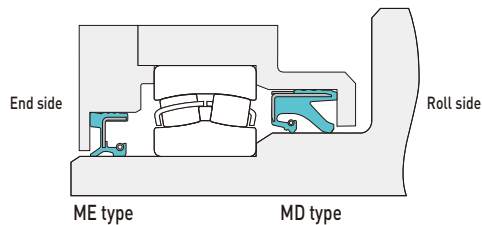


Bearing Housing Grease recovery method

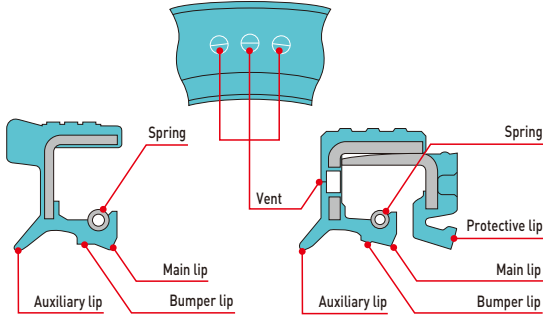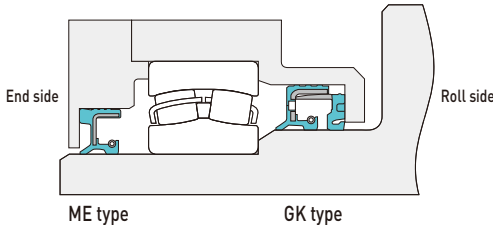

Oil Seals for Split Bearing Units

- Features
- Follow roll deflection
 - Suppress water and scale infiltration
 - Hold grease between lips

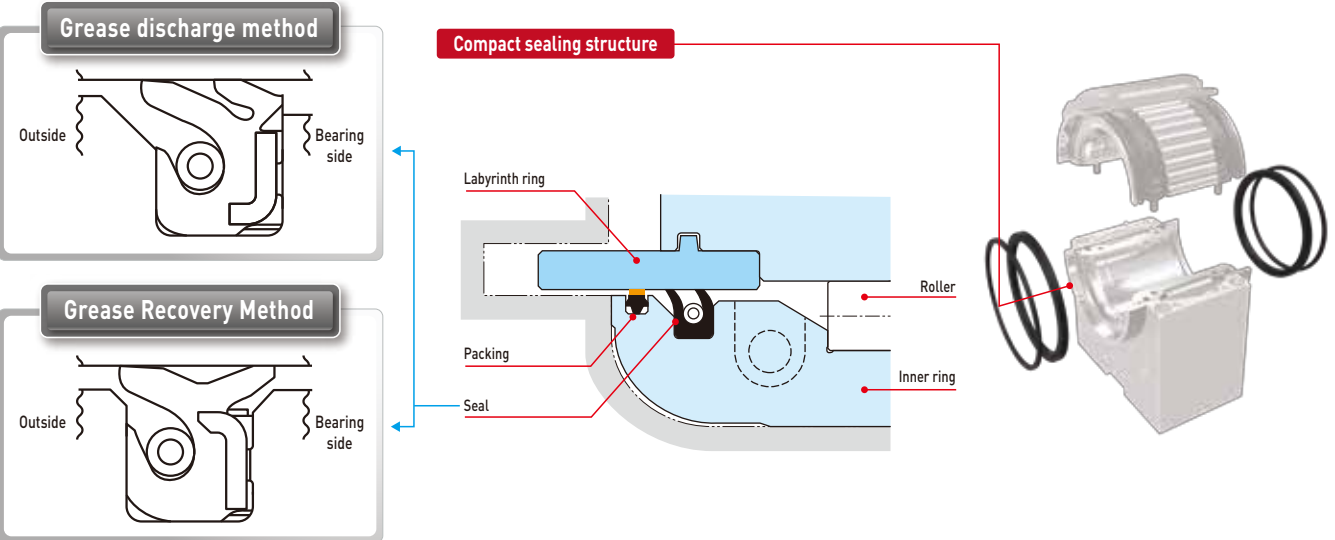

Please consult with JTEKT regarding oil seals for oil/air lubrication.

Oil Seal Rubber Material Used for Continuous Casting Machines

- Features
- Compared to fluoro rubber (FKM), hydrogenated nitrile rubber (HNBR) has superior water vapor resistance and grease resistance (urea-based), thereby providing better performance than FKM in cases of continuous use.

■ Rubber material resistance comparison


	Hydrogenated nitrile rubber (HNBR)	Fluoro rubber (FKM)	Nitrile butadiene rubber (NBR)
Heat resistance	○	○	△
Urea grease resistance	○	△	○
Water vapor resistance	○	×	△
Water resistance	○	○	○
Wear resistance	○	○	○

○:Has resistance (excluding specific cases) △:No resistance (excluding specific cases) ×:No resistance
Note: Judgment of heat resistance and water vapor resistance assumed a working condition of 100℃

Oil Seals for Sintering Machine Pallet Cars

Intermediate seal


- Features**
- No damage to peripheral parts owing to two-component (① and ②) combined structure
 - Prevents dust infiltration owing to high sealing performance provided by multilayer lip structure

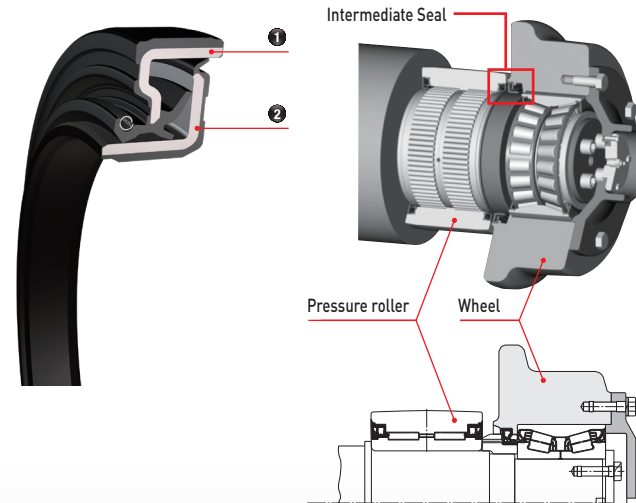

Sealed Bearing Seals

Bearing seal for pressure rollers

- Special seal shape with integrated sleeve prevents dust infiltration

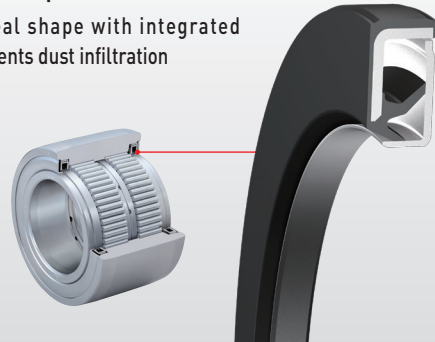

Bearing seals for wheels



- Compact seal shape with improved sealing performance prevents dust infiltration



Oil Seals for Converter Furnaces

Large Seals

- Features**
- MS-type oil seals can be cut in one location to enable easy installation on long or complex-shaped shafts




Converter trunnion split bearing



MS-type oil seal cut in one location

Technology Management

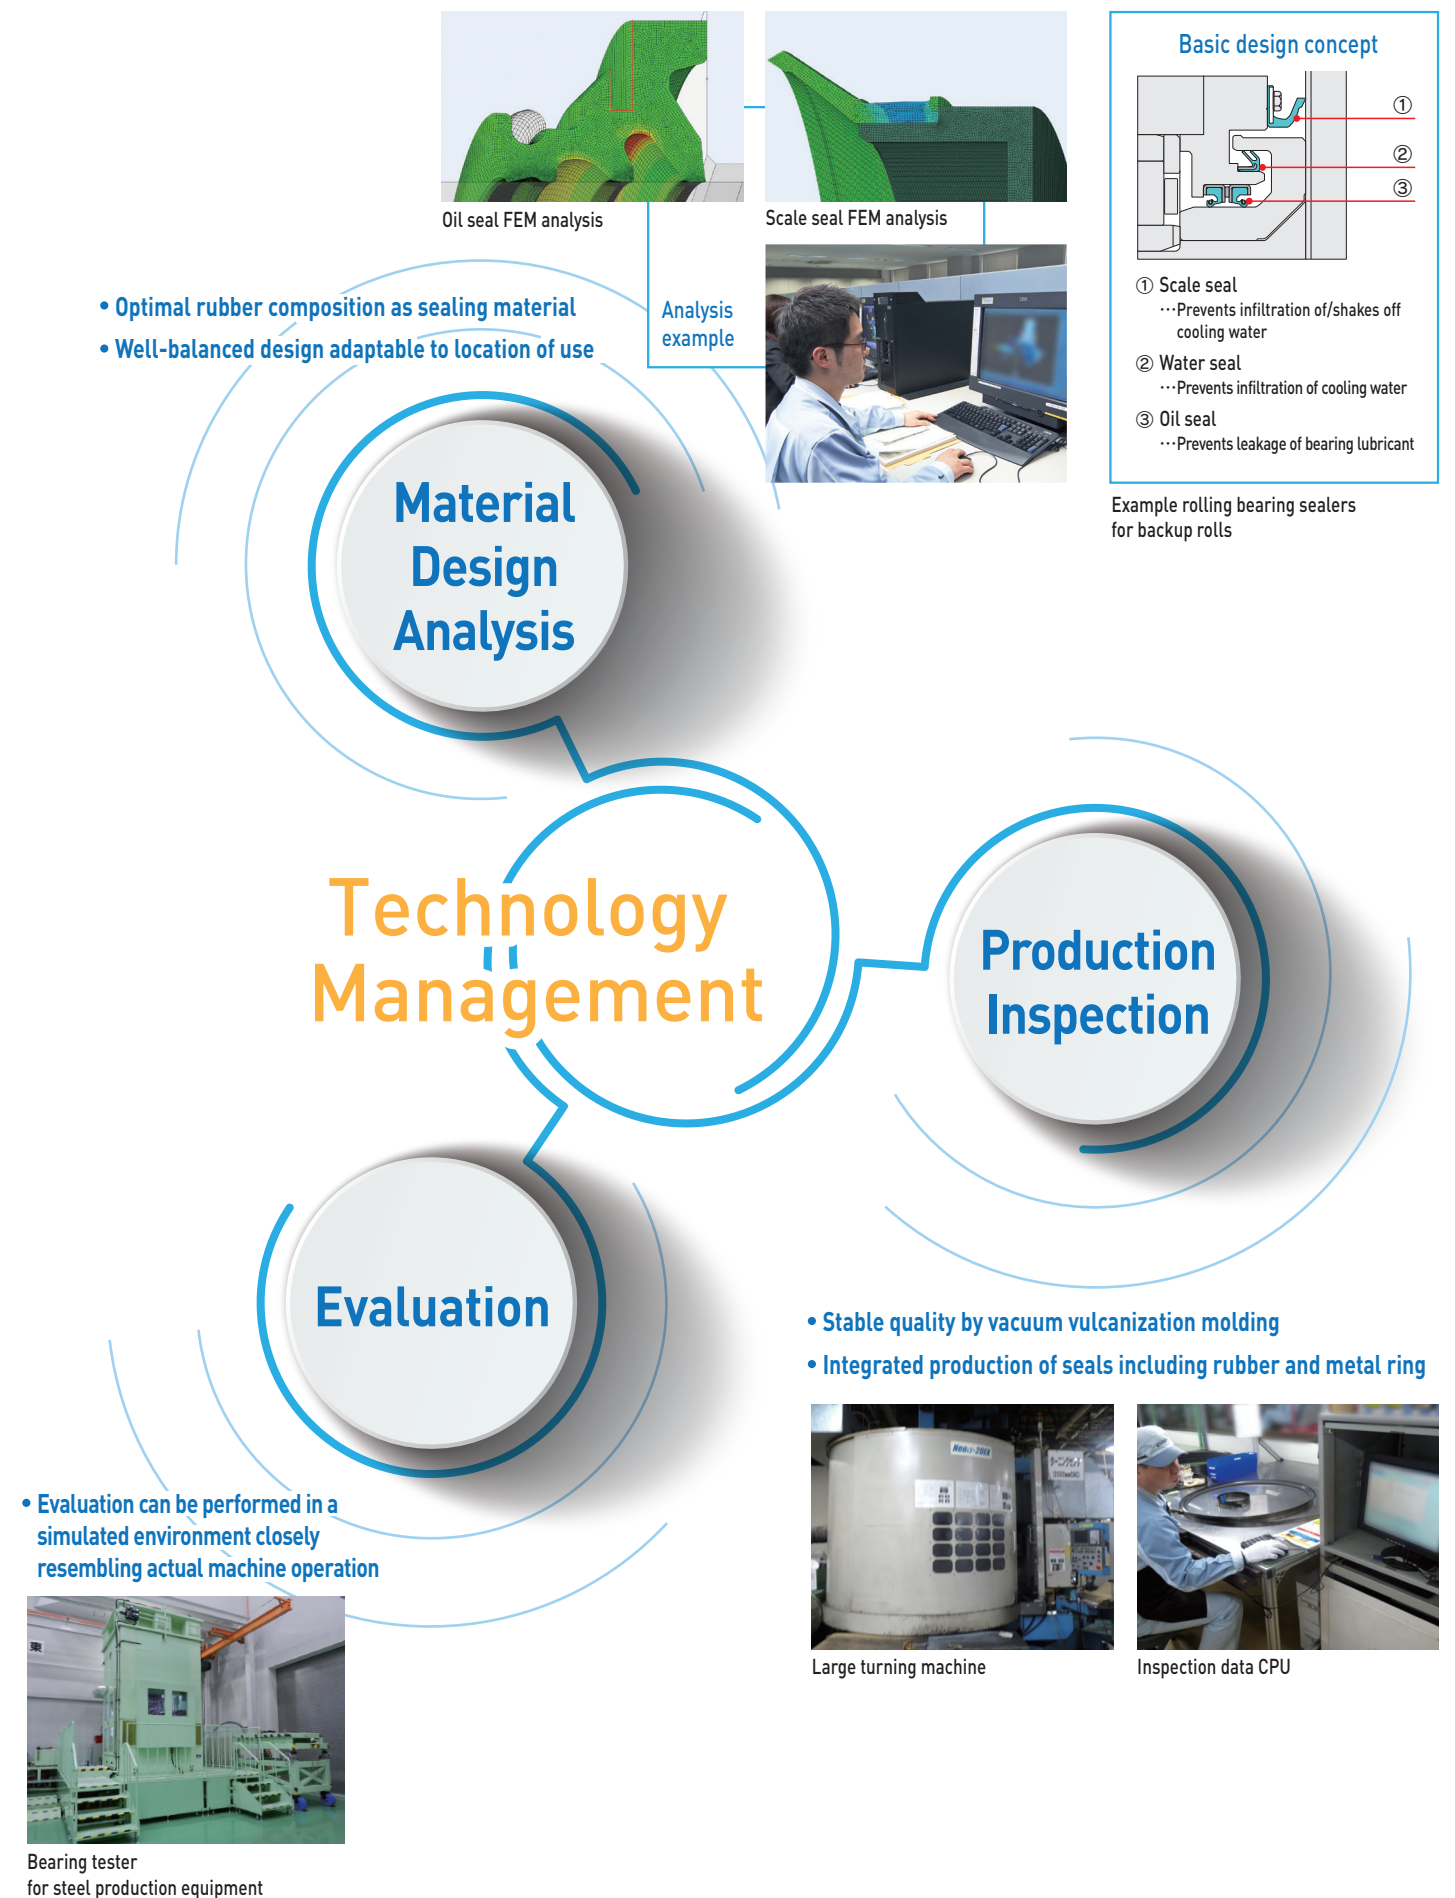

Locknuts and lockwashers

Bearings are often fit to a shaft with an adapter sleeve, locknut, lockwasher or lock plate.


These accessories make it easy to attach and remove bearings.

They are standardized in JIS.

- Locknuts are standardized such that they can be used with either adapter sleeves, withdrawal sleeves or shafts.
- Lockwashers and lock plates are used as locks on locknuts.


Lockwashers are used with bearings of bore diameter number 40 or lower. Lock plates are used with those of bore diameter 44 or higher.

Locknuts



AN 02 - 100

Lockwashers




AW 00 - 40 (X)

Locknuts

for adapter sleeves and shafts

AN02 – 25

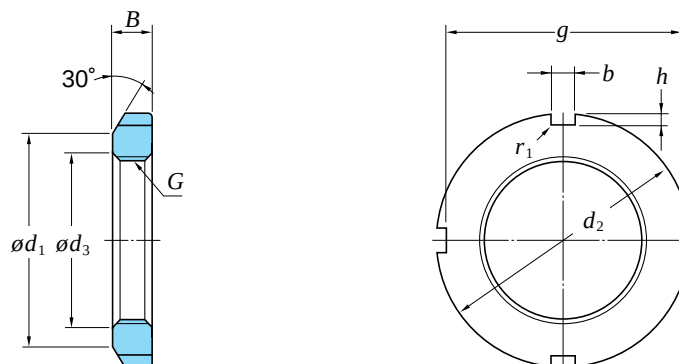

Locknut No.	Thread size	Standard dimensions (mm)								(Refer.) Mass (kg)	Applicable adapter sleeve (bore No.)	Applicable lockwasher No.
		d_2	d_1	g	d_3	b	h	B	$r_{max.}$			
AN02 03 04	M 15X1	25	21	21	15.5	4	2	5	0.4	0.010	—	AW02
	M 17X1	28	24	24	17.5	4	2	5	0.4	0.013	—	03
	M 20X1	32	26	28	20.5	4	2	6	0.4	0.019	04	04
AN05 06 07	M 25X1.5	38	32	34	25.8	5	2	7	0.4	0.025	05	AW05
	M 30X1.5	45	38	41	30.8	5	2	7	0.4	0.043	06	06
	M 35X1.5	52	44	48	35.8	5	2	8	0.4	0.053	07	07
AN08 09 10	M 40X1.5	58	50	53	40.8	6	2.5	9	0.5	0.085	08	AW08
	M 45X1.5	65	56	60	45.8	6	2.5	10	0.5	0.119	09	09
	M 50X1.5	70	61	65	50.8	6	2.5	11	0.5	0.148	10	10
AN11 12 13	M 55X2	75	67	69	56	7	3	11	0.5	0.158	11	AW11
	M 60X2	80	73	74	61	7	3	11	0.5	0.174	12	12
	M 65X2	85	79	79	66	7	3	12	0.5	0.203	13	13
AN14 15 16	M 70X2	92	85	85	71	8	3.5	12	0.5	0.242	14	AW14
	M 75X2	98	90	91	76	8	3.5	13	0.5	0.287	15	15
	M 80X2	105	95	98	81	8	3.5	15	0.6	0.397	16	16
AN17 18 19	M 85X2	110	105	103	86	8	3.5	16	0.6	0.451	17	AW17
	M 90X2	120	108	112	91	10	4	16	0.6	0.556	18	18
	M 95X2	125	113	117	96	10	4	17	0.6	0.658	19	19
AN20 21 22	M100X2	130	120	122	101	10	4	18	0.6	0.698	20	AW20
	M105X2	140	126	130	106	12	5	18	0.7	0.845	21	21
	M110X2	145	133	135	111	12	5	19	0.7	0.965	22	22
AN23 24 25	M115X2	150	137	140	116	12	5	19	0.7	1.01	—	AW23
	M120X2	155	138	145	121	12	5	20	0.7	1.08	24	24
	M125X2	160	148	150	126	12	5	21	0.7	1.19	—	25

Notes 1) Basic profile and dimension of screw thread are in accordance with JIS B 0207 (metric fine screw threads).

2) Applicable to adapter sleeve series A31, A2, A3 and A23.

3) Applicable to lockwashers with flat inner tongue.


AN26 – 40

Locknut No.	Thread size $G^{1)}$	Standard dimensions (mm)								(Refer.) Mass (kg)	Applicable ²⁾ adapter sleeve (bore No.)	Applicable ³⁾ lockwasher No.
		d_2	d_1	g	d_3	b	h	B	$r_{\max.}$			
AN26	M130X2	165	149	155	131	12	5	21	0.7	1.25	26	AW26
27	M135X2	175	160	163	136	14	6	22	0.7	1.55	—	27
28	M140X2	180	160	168	141	14	6	22	0.7	1.56	28	28
AN29	M145X2	190	172	178	146	14	6	24	0.7	1.80	—	AW29
30	M150X2	195	171	183	151	14	6	24	0.7	2.03	30	30
31	M155X3	200	182	186	156.5	16	7	25	0.7	2.30	—	—
AN32	M160X3	210	182	196	161.5	16	7	25	0.7	2.59	32	AW32
33	M165X3	210	193	196	166.5	16	7	26	0.7	2.70	—	—
34	M170X3	220	193	206	171.5	16	7	26	0.7	2.80	34	34
AN36	M180X3	230	203	214	181.5	18	8	27	0.7	3.07	36	AW36
38	M190X3	240	214	224	191.5	18	8	28	0.7	3.39	38	38
40	M200X3	250	226	234	201.5	18	8	29	0.7	3.69	40	40

Locknuts

for adapter sleeves and shafts

AN44 – 100

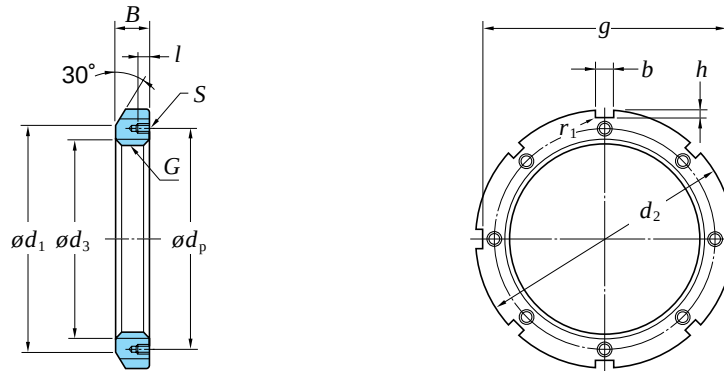

Locknut No.	Thread size $G^{1)}$	Standard dimensions (mm)								Tapped hole (mm)			(Refer.) Mass (kg)	Applicable ³⁾ adapter sleeve (bore No.)	Applicable lock plate No.
		d_2	d_1	g	d_3	b	h	B	$r_{max.}$	l	$S^{2)}$ Thread size	d_p			
AN44	Tr220X4	280	250	260	222	20	10	32	0.8	15	M 8X1.25	238	5.16	44	AL44
48	Tr240X4	300	270	280	242	20	10	34	0.8	15	M 8X1.25	258	5.91	48	44
52	Tr260X4	330	300	306	262	24	12	36	0.8	18	M10X1.5	281	7.99	52	52
AN56	Tr280X4	350	320	326	282	24	12	38	0.8	18	M10X1.5	301	8.99	56	AL52
60	Tr300X4	380	340	356	302	24	12	40	0.8	18	M10X1.5	326	11.7	60	60
64	Tr320X5	400	360	376	322.5	24	12	42	0.8	18	M10X1.5	345	13.0	64	64
AN68	Tr340X5	440	400	410	342.5	28	15	55	1	21	M12X1.75	372	23.0	68	AL68
72	Tr360X5	460	420	430	362.5	28	15	58	1	21	M12X1.75	392	25.0	72	68
76	Tr380X5	490	450	454	382.5	32	18	60	1	21	M12X1.75	414	30.8	76	76
AN80	Tr400X5	520	470	484	402.5	32	18	62	1	27	M16X2	439	36.7	80	AL80
84	Tr420X5	540	490	504	422.5	32	18	70	1	27	M16X2	459	43.3	84	80
88	Tr440X5	560	510	520	442.5	36	20	70	1	27	M16X2	477	45.1	88	88
AN92	Tr460X5	580	540	540	462.5	36	20	75	1	27	M16X2	497	50.2	92	AL88
96	Tr480X5	620	560	580	482.5	36	20	75	1	27	M16X2	527	62.0	96	96
100	Tr500X5	630	580	584	502.5	40	23	80	1	27	M16X2	539	63.1	/500	100


Notes 1) Basic profile and dimension of screw thread are in accordance with JIS B 0216.

2) Basic profile and dimension of bore with internal thread are in accordance with JIS B 0205 (metric coarse screw threads).


3) Applicable to adapter sleeve series A31, A32, A23 and A30.

Lockwashers

AW00 – 40(X)



With bent inner tongue

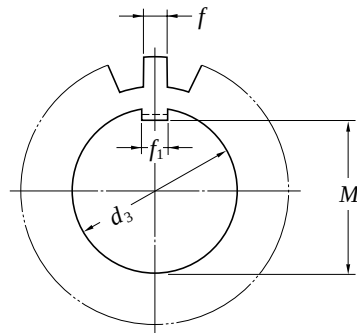

With flat inner tongue

Lockwasher No.		Standard dimensions (mm)										No. of tooth	(Refer.) Mass (kg/100pcs.)	Applicable adapter sleeve (bore No.)	Applicable locknut No.
With bent inner tongue	With flat inner tongue	d_3	M	f_1	B_1	f	d_4	d_5	r	B_2					
AW00 01 02	AW00X 01X 02X	10	8.5	3	1	3	13	21	0.5	2	9	0.131	—	AN00	
		12	10.5	3	1	3	17	25	0.5	2	9	0.192	—	01	
		15	13.5	4	1	4	21	28	1	2.5	13	0.253	—	02	
AW03 04 05	AW03X 04X 05X	17	15.5	4	1	4	24	32	1	2.5	13	0.313	—	AN03	
		20	18.5	4	1	4	26	36	1	2.5	13	0.350	04	04	
		25	23	5	1.2	5	32	42	1	2.5	13	0.640	05	05	
AW06 07 08	AW06X 07X 08X	30	27.5	5	1.2	5	38	49	1	2.5	13	0.780	06	AN06	
		35	32.5	6	1.2	5	44	57	1	2.5	15	1.04	07	07	
		40	37.5	6	1.2	6	50	62	1	2.5	15	1.23	08	08	
AW09 10 11	AW09X 10X 11X	45	42.5	6	1.2	6	56	69	1	2.5	17	1.52	09	AN09	
		50	47.5	6	1.2	6	61	74	1	2.5	17	1.60	10	10	
		55	52.5	8	1.2	7	67	81	1	4	17	1.96	11	11	
AW12 13 14	AW12X 13X 14X	60	57.5	8	1.5	7	73	86	1.2	4	17	2.53	12	AN12	
		65	62.5	8	1.5	7	79	92	1.2	4	19	2.90	13	13	
		70	66.5	8	1.5	8	85	98	1.2	4	19	3.34	14	14	
AW15 16 17	AW15X 16X 17X	75	71.5	8	1.5	8	90	104	1.2	4	19	3.56	15	AN15	
		80	76.5	10	1.8	8	95	112	1.2	4	19	4.64	16	16	
		85	81.5	10	1.8	8	102	119	1.2	4	19	5.24	17	17	
AW18 19 20	AW18X 19X 20X	90	86.5	10	1.8	10	108	126	1.2	4	19	6.23	18	AN18	
		95	91.5	10	1.8	10	113	133	1.2	4	19	6.70	19	19	
		100	96.5	12	1.8	10	120	142	1.2	6	19	7.65	20	20	
AW21 22 23	AW21X 22X 23X	105	100.5	12	1.8	12	126	145	1.2	6	19	8.26	21	AN21	
		110	105.5	12	1.8	12	133	154	1.2	6	19	9.40	22	22	
		115	110.5	12	2	12	137	159	1.5	6	19	10.8	—	23	
AW24 25 26	AW24X 25X 26X	120	115	14	2	12	138	164	1.5	6	19	10.5	24	AN24	
		125	120	14	2	12	148	170	1.5	6	19	11.8	—	25	
		130	125	14	2	12	149	175	1.5	6	19	11.3	26	26	
AW27 28 29	AW27X 28X 29X	135	130	14	2	14	160	185	1.5	6	19	14.4	—	AN27	
		140	135	16	2	14	160	192	1.5	8	19	14.2	28	28	
		145	140	16	2	14	172	202	1.5	8	19	16.8	—	29	
AW30 31 32	AW30X 31X 32X	150	145	16	2	14	171	205	1.5	8	19	15.5	30	AN30	
		155	147.5	16	2.5	16	182	212	1.5	8	19	20.9	—	31	
		160	154	18	2.5	16	182	217	1.5	8	19	22.2	32	32	
AW33 34 36	AW33X 34X 36X	165	157.5	18	2.5	16	193	222	1.5	8	19	24.1	—	AN33	
		170	164	18	2.5	16	193	232	1.5	8	19	24.7	34	34	
		180	174	20	2.5	18	203	242	1.5	8	19	26.8	36	36	
AW38 40	AW38X 40X	190	184	20	2.5	18	214	252	1.5	8	19	27.8	38	AN38	
		200	194	20	2.5	18	226	262	1.5	8	19	29.3	40	40	

Remarks 1) AW00–AW40, AW00X–AW40X are applicable to adapter assembly series H31, H2, H3 and H23.

2) For adapter sleeves with narrow slits, lockwashers with flat inner tongue should be used. Either type of lockwasher can be used for adapter sleeves with wide slits.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Россия +7(495)268-04-70

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Киргизия +996(312)-96-26-47

Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93